

### Boomer® Audio Power Amplifier Series

## Uplink Noise Suppression & Downlink SNR Enhancement Analog Audio Subsystem

### General Description

The LM49155 is a fully integrated audio subsystem designed for portable handheld applications such as cellular phones. The LM49155 combines a Noise Suppression microphone amplifier, a 1.35W mono class D amplifier with ALC, class AB earpiece driver with AGC, a high efficiency, stereo, ground referenced headphone amplifier with click pop suppression and I<sup>2</sup>C modes select and volume control.

The LM49155 features analog fully differential input, and differential output microphone amplifier designed to reduce background acoustic noise, while delivering superb speech clarity in voice communication applications. Downlink SNR enhancement with an advanced acoustic AGC technology to adjust output levels.

The LM49155 speaker amplifier features National's unique output limiter that provides both a no-clip feature and speaker protection. The E<sup>2</sup>S class D amplifier features a patented, ultra low EMI PWM architecture that significantly reduces RF emissions while preserving audio quality and efficiency. The headphone drivers feature National's ground referenced architecture that creates a ground-referenced output from a single, low-voltage supply.

The LM49155 is available in an ultra-small 36-bump micro SMD package (3.434mm x 3.459mm x 0.6mm).

**Notice:** This document is not a full datasheet. For more information regarding this product or to order samples please contact your local National Semiconductor sales office or visit <http://www.national.com/support/dir.html>

### Key Specifications

- Uplink Far Field Noise Suppression  
Electrical FFNS<sub>E</sub> at f = 1kHz 34dB (typ)
- Downlink SNR Enhancement Earpiece Amplifier  
Near-Field SNR Enhancement 6 to 18dB (typ)  
Downlink SNRI<sub>E</sub> 16dB (typ)
- Class D Loudspeaker Amplifier R<sub>L</sub> = 15μH+8Ω+15μH  
P<sub>OUT</sub>, THD+N ≤ %, V<sub>DD</sub> = 5.0V 1.35W (typ)
- Headphone Amplifier R<sub>L</sub> = 32Ω  
P<sub>OUT</sub>, THD+N ≤ %, HPV<sub>DD</sub> = 1.8V 19mW (typ)


### Features

- Noise cancellation for uplink and downlink without DSP-type artifacts, distortions or delays
- Adapting AGC on ambient noise level & downlink signal strength for earpiece
- Downlink adjustable noise-reducing high pass filter
- E<sup>2</sup>S Class D Amplifier with ALC
- Ground Referenced Headphone Outputs with Advanced Click Pop Suppression
- Micro-power shutdown

### Applications

- Mobile Phones
- Portable Electronic Devices


### Simplified Block Diagram

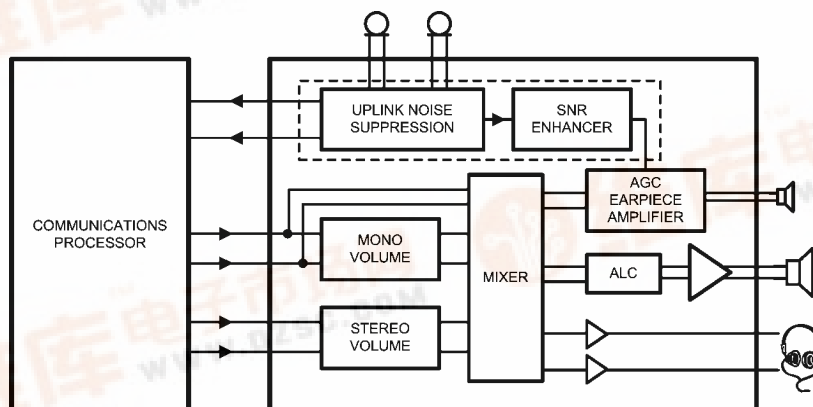

30108109

# Typical Application

查询"LM49155"供应商

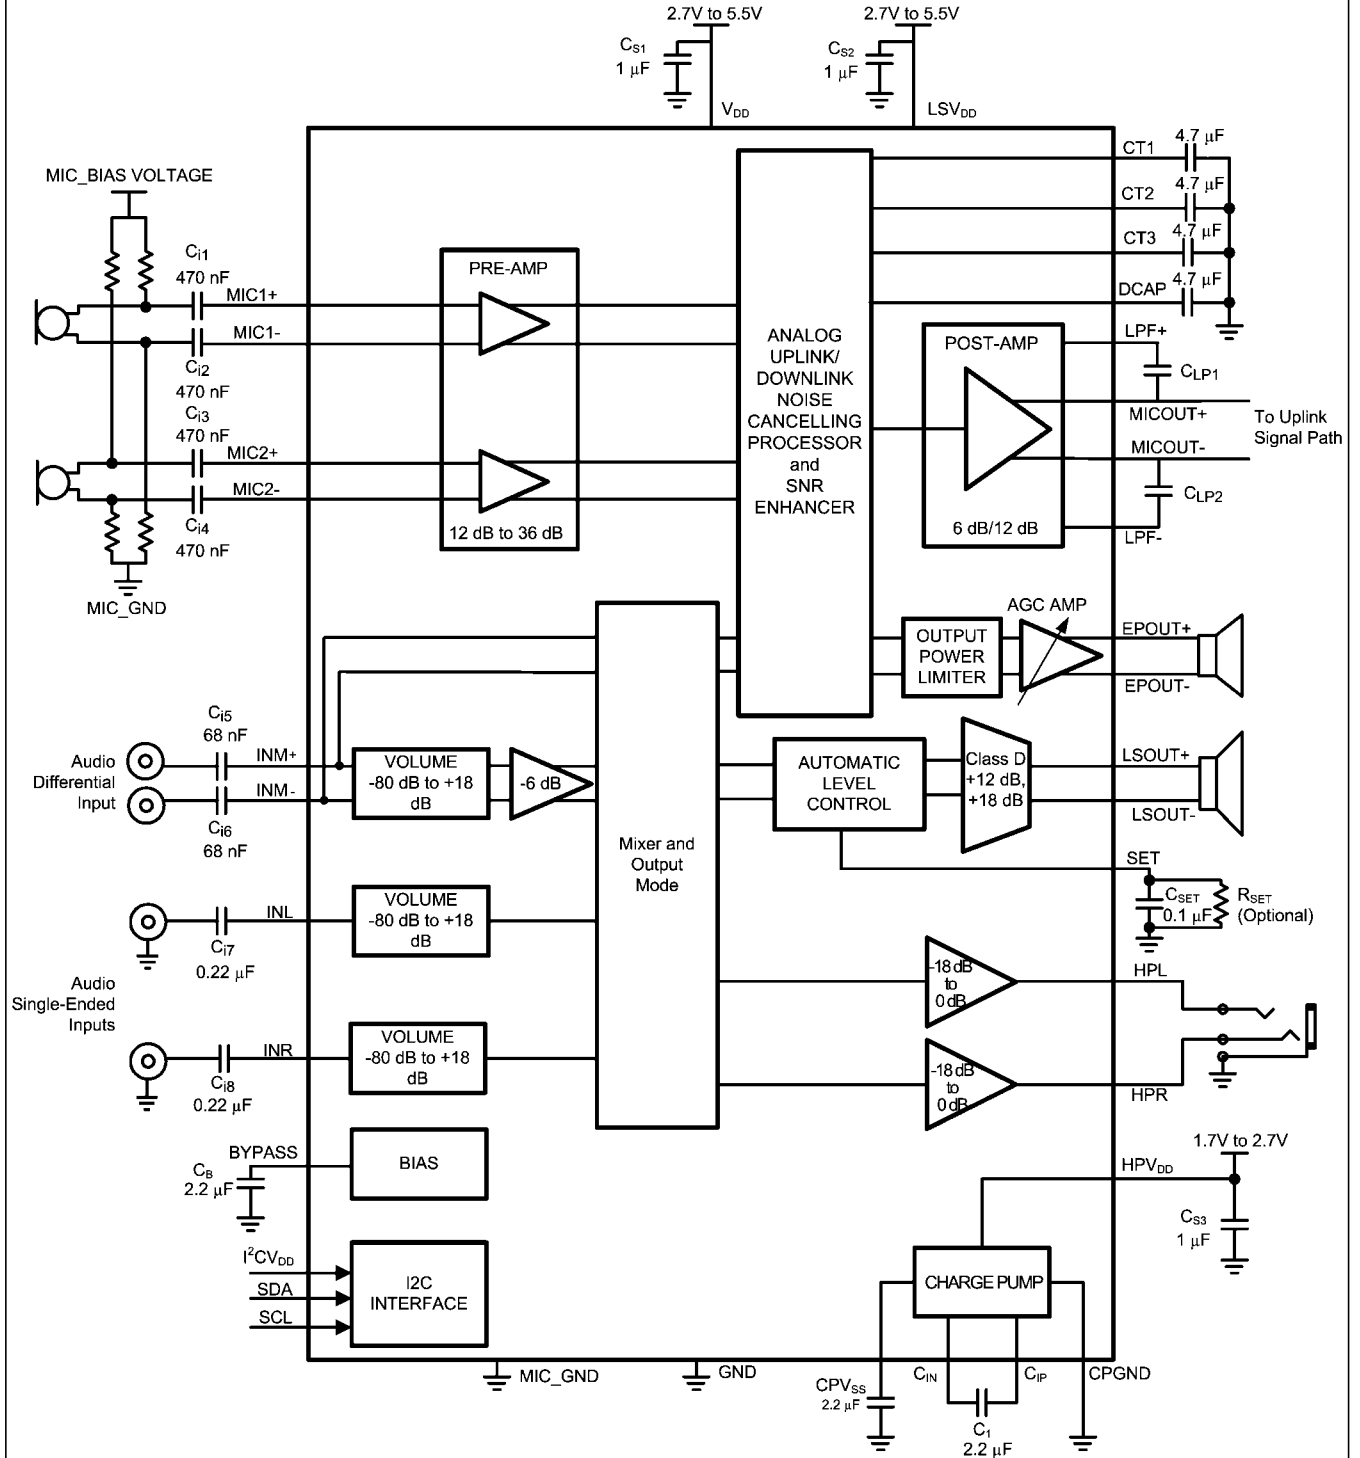

30108108


FIGURE 1. Typical Application Circuit

## Connection Diagrams

[查询"LM49155"供应商](#)

**TL Package**  
(3.434mm x 3.459mm x 0.6mm)


Top View

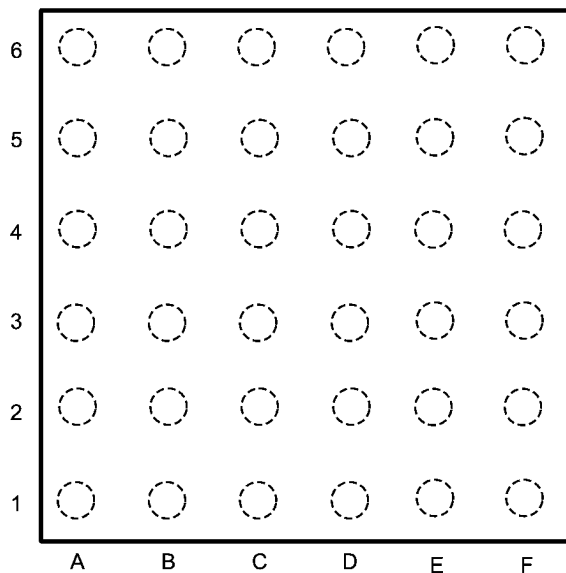

Top View (Bump Side Down)  
Order Number LM49155TL  
See NS Package Number TLA36STA

30108107

**36 Bump micro SMD Marking**

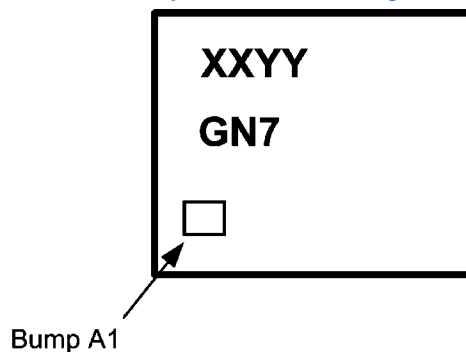

Top View  
XX — Date Code  
YY — Die Traceability  
G — Boomer  
N7 — LM49155TL

30108112


### Ordering Information

Order Number	Package	Package DWG #	Transport Media	MSL Level	Green Status
LM49155TL	36 Bump microSMD	TLA36STA	250 units on tape and reel	1	NOPB
LM49155TLX	36 Bump microSMD	TLA36STA	3000 units on tape and reel	1	NOPB

# Physical Dimensions

inches (millimeters) unless otherwise noted

[查询"LM49155"供应商](#)

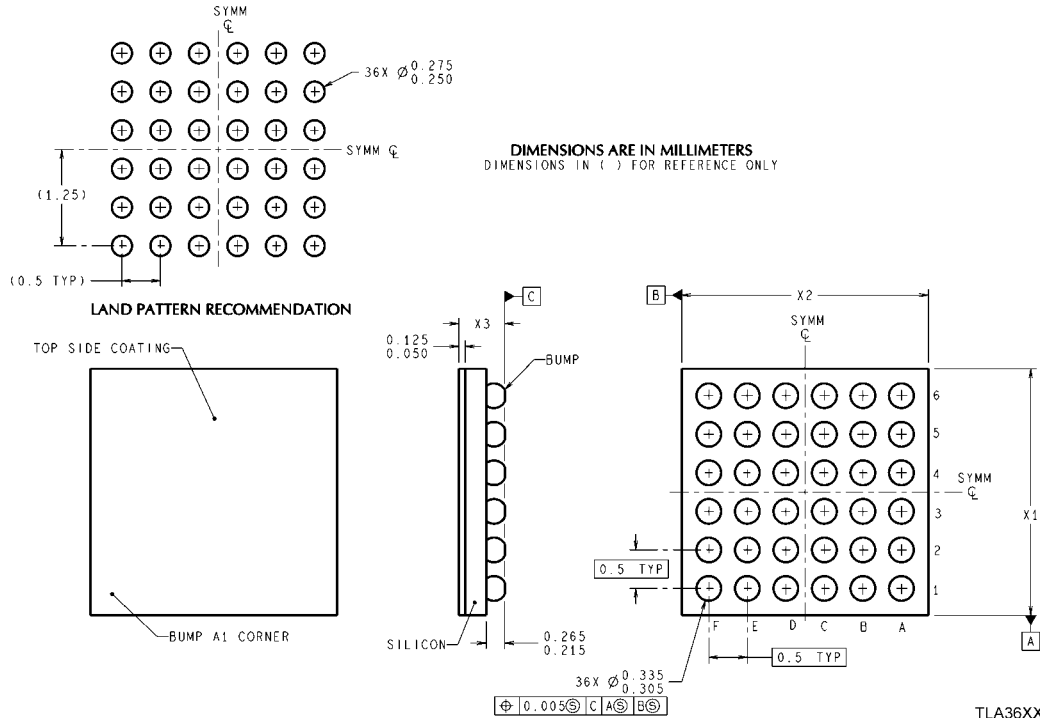

[查询"LM49155"供应商](#)

## Notes

[查询"LM49155"供应商](#)

## Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:  
[www.national.com](http://www.national.com)

Products		Design Support	
Amplifiers	<a href="http://www.national.com/amplifiers">www.national.com/amplifiers</a>	WEBENCH® Tools	<a href="http://www.national.com/webench">www.national.com/webench</a>
Audio	<a href="http://www.national.com/audio">www.national.com/audio</a>	App Notes	<a href="http://www.national.com/appnotes">www.national.com/appnotes</a>
Clock and Timing	<a href="http://www.national.com/timing">www.national.com/timing</a>	Reference Designs	<a href="http://www.national.com/refdesigns">www.national.com/refdesigns</a>
Data Converters	<a href="http://www.national.com/adc">www.national.com/adc</a>	Samples	<a href="http://www.national.com/samples">www.national.com/samples</a>
Interface	<a href="http://www.national.com/interface">www.national.com/interface</a>	Eval Boards	<a href="http://www.national.com/evalboards">www.national.com/evalboards</a>
LVDS	<a href="http://www.national.com/lvds">www.national.com/lvds</a>	Packaging	<a href="http://www.national.com/packaging">www.national.com/packaging</a>
Power Management	<a href="http://www.national.com/power">www.national.com/power</a>	Green Compliance	<a href="http://www.national.com/quality/green">www.national.com/quality/green</a>
Switching Regulators	<a href="http://www.national.com/switchers">www.national.com/switchers</a>	Distributors	<a href="http://www.national.com/contacts">www.national.com/contacts</a>
LDOs	<a href="http://www.national.com/ldo">www.national.com/ldo</a>	Quality and Reliability	<a href="http://www.national.com/quality">www.national.com/quality</a>
LED Lighting	<a href="http://www.national.com/led">www.national.com/led</a>	Feedback/Support	<a href="http://www.national.com/feedback">www.national.com/feedback</a>
Voltage References	<a href="http://www.national.com/vref">www.national.com/vref</a>	Design Made Easy	<a href="http://www.national.com/easy">www.national.com/easy</a>
PowerWise® Solutions	<a href="http://www.national.com/powerwise">www.national.com/powerwise</a>	Applications & Markets	<a href="http://www.national.com/solutions">www.national.com/solutions</a>
Serial Digital Interface (SDI)	<a href="http://www.national.com/sdi">www.national.com/sdi</a>	Mil/Aero	<a href="http://www.national.com/milaero">www.national.com/milaero</a>
Temperature Sensors	<a href="http://www.national.com/tempsensors">www.national.com/tempsensors</a>	SolarMagic™	<a href="http://www.national.com/solarmagic">www.national.com/solarmagic</a>
PLL/VCO	<a href="http://www.national.com/wireless">www.national.com/wireless</a>	PowerWise® Design University	<a href="http://www.national.com/training">www.national.com/training</a>

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

### LIFE SUPPORT POLICY

**NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION.** As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2010 National Semiconductor Corporation

For the most current product information visit us at [www.national.com](http://www.national.com)



**National Semiconductor  
Americas Technical  
Support Center**  
Email: [support@nsc.com](mailto:support@nsc.com)  
Tel: 1-800-272-9959

**National Semiconductor Europe  
Technical Support Center**  
Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)

**National Semiconductor Asia  
Pacific Technical Support Center**  
Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor Japan  
Technical Support Center**  
Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)