


查询"CTLQ1812CF-101K"供应商

CTLQ1812CF Series

From 1.0 μH to 470 μH

ENGINEERING KIT #25F

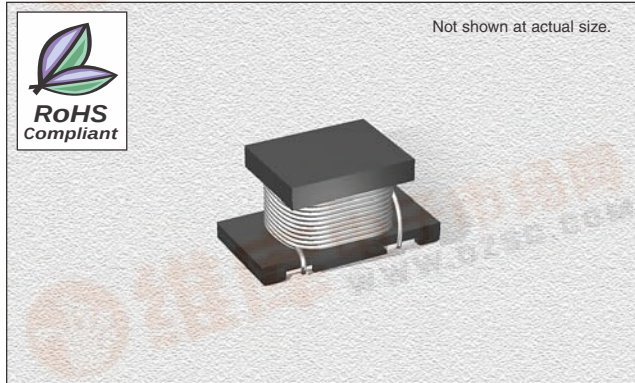

CHARACTERISTICS

Description: SMD power inductor

Applications: Power supplies for VTR, OA equipment, LCD televisions, PC notebooks, portable communication equipment, DC/DC converters, etc.

Operating Temperature: -25°C to +85°C

Inductance Tolerance: K = $\pm 10\%$, M = $\pm 20\%$

Packaging: Tape & Reel

Miscellaneous: RoHS Compliant.

Testing: Tested on a HP4285A @ a specified frequency

Pads: Soft copper and pre-tinned

Additional Information: Additional electrical & physical information available upon request

Samples available. See website for ordering information.


SPECIFICATIONS

Parts numbers indicate inductance tolerance available.
K = $\pm 10\%$, M = $\pm 20\%$

Part Number	Inductance (μH)	Test Freq. (Hz)	DCR (Ω) Max.	SRF (MHz) Min.	Rated DC (mA) Max.
CTLQ1812CF-1R0M	1.0	1M	0.08	100	1080
CTLQ1812CF-1R5M	1.5	1M	0.09	85	1000
CTLQ1812CF-2R2M	2.2	1M	0.11	60	900
CTLQ1812CF-3R3M	3.3	1M	0.13	47	800
CTLQ1812CF-4R7M	4.7	1M	0.15	35	750
CTLQ1812CF-6R8M	6.8	1M	0.20	30	720
CTLQ1812CF-100K	10	1M	0.24	23	650
CTLQ1812CF-150K	15	1M	0.32	20	570
CTLQ1812CF-220K	22	1M	0.60	15	420
CTLQ1812CF-330K	33	1M	1.00	12	310
CTLQ1812CF-470K	47	1M	1.10	10	280
CTLQ1812CF-680K	68	1M	1.70	8.4	220
CTLQ1812CF-101K	100	1M	2.20	6.8	190
CTLQ1812CF-151K	150	1M	3.50	5.5	130
CTLQ1812CF-221K	220	1M	4.00	4.5	110
CTLQ1812CF-331K	330	1M	6.80	3.6	100
CTLQ1812CF-471K	470	1k	8.50	3.0	90

PHYSICAL DIMENSIONS

Size	A	B	C	D	E	F Min.	G Min.
mm	4.5 $\pm$ 0.3	2.6 $\pm$ 0.2	3.6 $\pm$ 0.2	3.2 $\pm$ 0.2	3.2 $\pm$ 0.2	1.0	1.0
inches	0.18 $\pm$ 0.01	0.10 $\pm$ 0.008	0.14 $\pm$ 0.008	0.12 $\pm$ 0.008	0.12 $\pm$ 0.008	0.04	0.04

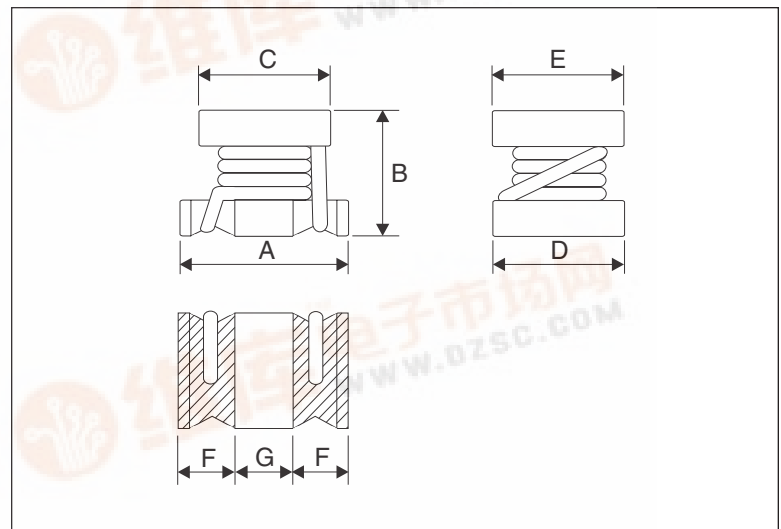

09.16.08

Manufacturer of Passive Components

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2008 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice