查询"1182"供应商

1182 SERIES

Operating Voltage= 115/250 Vac
OperatingCurrentMax= 20, 30amp
Operating Frequency= 50-60Hz
Temperature Range= -10 to 50 deg. C
DieWithstand(Ph to Case)= 1500V~ for 1 Min
DieWithstand (Ph to Ph)= 1500Vdc for 1 min
Leakage Current = 2.1 mA @ 250 VAC, 50Hz
Discharge after 1.0 sec.= 34V Max
Agency Approvals = UL,CSA
P/N 20 amps FF-1182-20
P/N 30 amps FF-1182-30

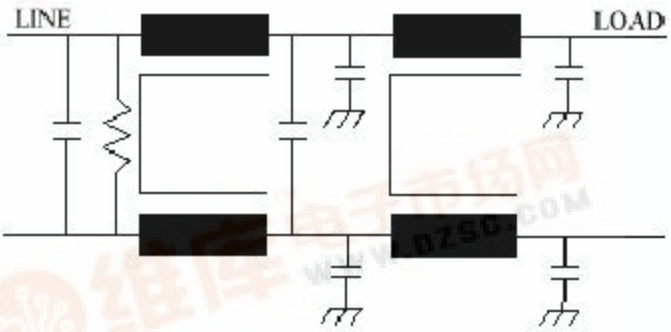

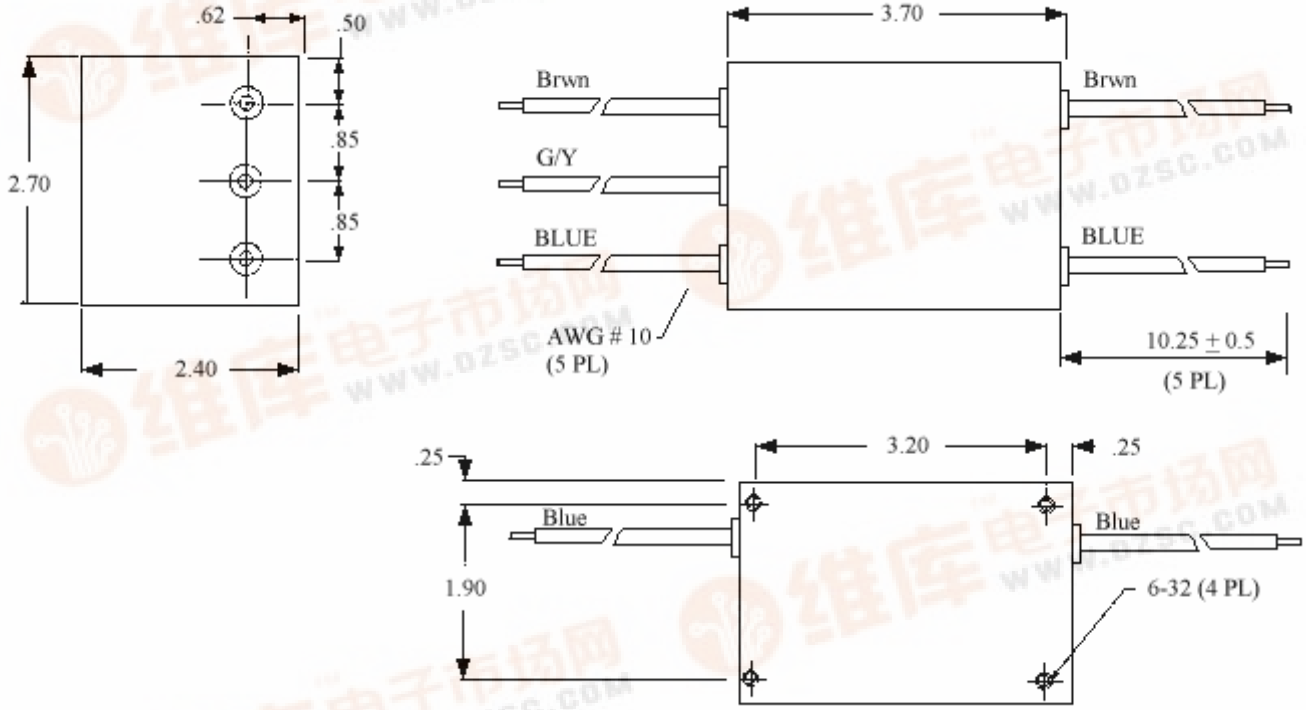

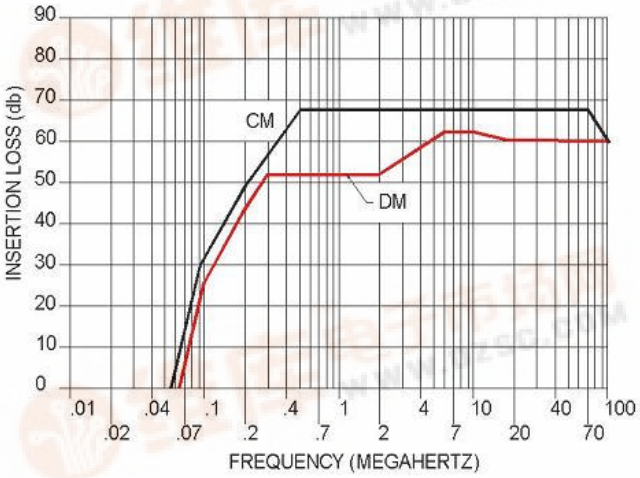

The 1182 series is a compact, economical filter with a lot of performance packed into a small package.

This filter is ideal for use with power distribution units, systems using switching power supplies

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
email: info@jmkfilters.com
EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884

pdf.dzsc.com