

PHASE LOCKED OSCILLATOR

查询"611214"供应商

MODEL 611214 (800 MHz)



Features

- Low Phase Noise: -137 dBc/Hz @ 100 kHz
- Low Spurious: -70 dBc Typical
- Internal Reference Design
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -20 °C to +70 °C
Frequency (MHz)	800	800
Output Power (dBm)	+10	+9
Variation Over Temperature (dBm)	±0.75	±1
Spurious (dBc)	-70	-60
Phase Noise (dB)	-92 dBc/Hz @ 100 Hz -121 dBc/Hz @ 1 kHz -129 dBc/Hz @ 10 kHz -127 dBc/Hz @ 30 kHz -137 dBc/Hz @ 100 kHz -148 dBc/Hz @ 1 MHz	
VSWR	1.5	2.0
Harmonics (dBc)	-25	-20
Lock Indicator	TTL (High=Locked)	TTL (Low=Unlocked)
Stability (ppm)	+1	+15
Storage Temperature	-55 °C	+125 °C
Supply Power DC	15	15
mA	150	160


Description

Spectrum Microwave's Series 600 Phase Locked Oscillators use a High "Q" Coaxial Resonator in the resonant circuit. The circuit is lightly loaded to obtain the lowest phase noise possible.

The resonator is soldered to a printed circuit board and well grounded to minimize modulation sidebands during shock and vibration.

Buffer amplifiers are used to provide isolation from load VSWRs; Regulators filter noise on the DC input voltage.

External reference models are also available. A lock indicator circuit is provided to signal an out-of-lock condition.

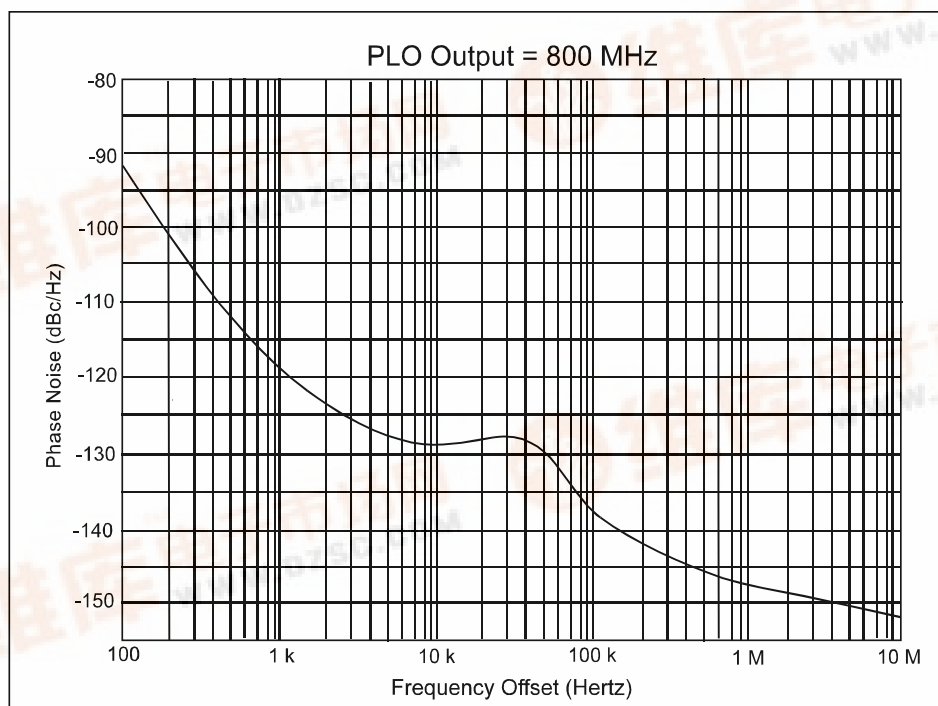

Spectrum Microwave, Inc.

www.SpectrumMicrowave.com

2707 Black Lake Place Phila, Pa. 19154
PH: 215-464-4000 FAX: 215-464-4001

Rev.
9/22/08



PHASE LOCKED OSCILLATOR

查询"611214"供应商

MODEL 611214 (800 MHz)



Outline Drawing

