

181-050
M29504/16 Style GFOCA Genderless Terminus
for Use with M83526/16/17 Style
Hermaphroditic Connectors




181-050-1260 C

Product Series _____
 Basic Number _____
 Dash Number (Table I) _____
 Add "C" to include _____
 Crimp Sleeve (Omit for None)

TABLE I: DASH NUMBER

Assembly Dash No.	A Dia (mm)		Fiber Type (Typical)
	Max	Min	
181-050-1250	.1260	.1250	SM
181-050-1255	.1265	.1255	SM
181-050-1260	.1270	.1260	SM & MM
181-050-1270	.1280	.1270	MM
181-050-1420	.1430	.1420	MM
181-050-2300	.2340	.2300	MM

SM = Singlemode
 MM = Multimode

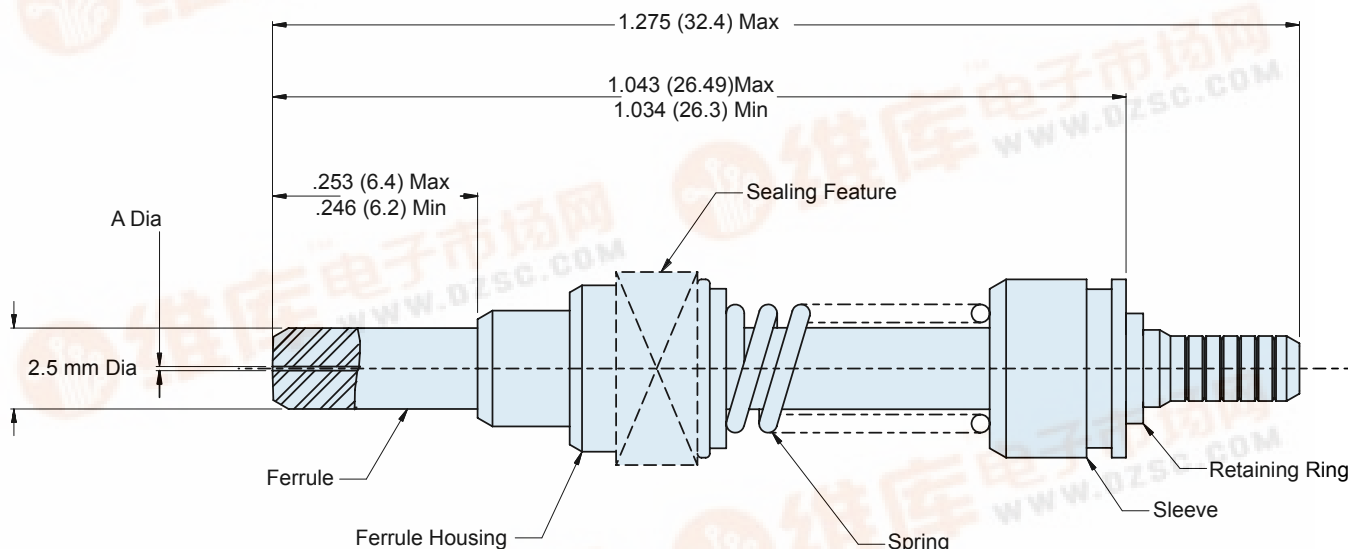

APPLICATION NOTES

1. Assembly packaged in plastic bag and tag identified with manufacturer's name and part number.
2. Material/ Finish:
 Ferrule: Zirconia Ceramic/ N.A.
 Terminus Assembly: Stainless Steel/ Passivate
 Spring: High Tensile Stainless Steel/ Passivate
 Sliding Sleeve: Stainless Steel/ Passivate
 Retaining Ring: Stainless Steel/ Passivate
3. Insertion/Removal Tool: Consult factory
4. Consult factory for assembly and termination tools.
5. For Glenair GFOCA connector product, refer to Glenair 180-116 and 180-117 drawings (Pages F-4 and F-6).
6. Metric dimensions (mm) are indicated in parentheses.
7. Crimp sleeve: See 265-008.



This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn