

AS85049/96 Mounting Flange, 1/4 Perimeter

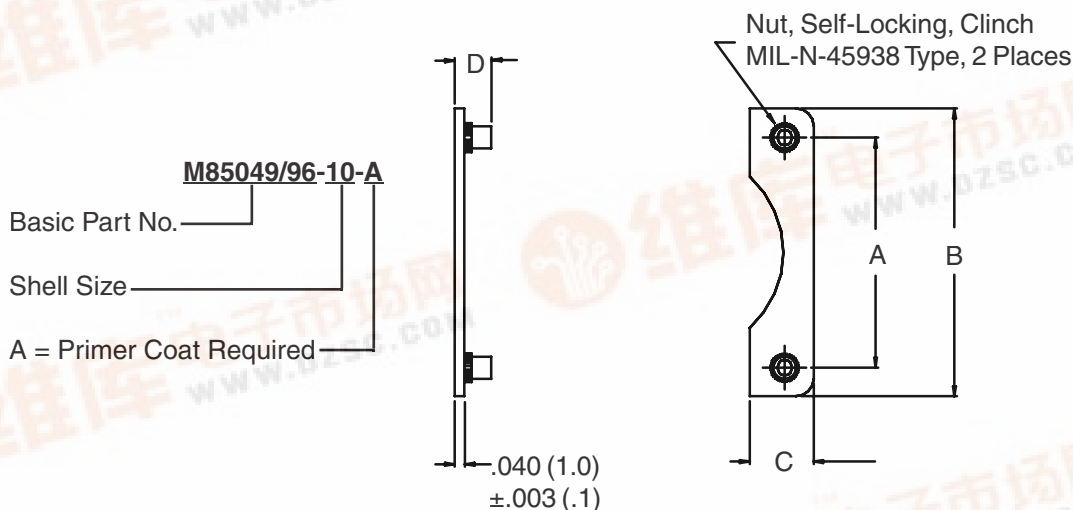


TABLE I

Shell Size	Thread UNJC-3B	A ±.003 (.1)	B ±.015 (.4)	C +.010 (-.000) (.3)	D ±.030 (.8)
3	4-40	.625 (15.9)	.925 (23.5)	.300 (7.6)	.136 (3.5)
6*	4-40	.469 (11.9)	.766 (19.5)	.298 (7.6)	.136 (3.5)
7	4-40	.719 (18.3)	1.016 (25.8)	.298 (7.6)	.136 (3.5)
8	4-40	.594 (15.1)	.891 (22.6)	.296 (7.5)	.136 (3.5)
10	4-40	.719 (18.3)	1.016 (25.8)	.298 (7.6)	.136 (3.5)
12	4-40	.812 (20.6)	1.109 (28.2)	.296 (7.5)	.136 (3.5)
14	4-40	.906 (23.0)	1.203 (30.6)	.296 (7.5)	.136 (3.5)
16	4-40	.969 (24.6)	1.266 (32.2)	.298 (7.6)	.136 (3.5)
18	4-40	1.062 (27.0)	1.390 (35.3)	.328 (8.3)	.136 (3.5)
19	4-40	.906 (23.0)	1.203 (30.6)	.296 (7.5)	.136 (3.5)
20	4-40	1.156 (29.4)	1.510 (38.4)	.354 (9.0)	.136 (3.5)
22	4-40	1.250 (31.8)	1.640 (41.7)	.390 (9.9)	.136 (3.5)
24	6-32	1.375 (34.9)	1.760 (44.7)	.386 (9.8)	.153 (3.9)
25	6-32	1.500 (38.1)	1.859 (47.2)	.358 (9.1)	.153 (3.9)
27	4-40	.969 (24.6)	1.266 (32.2)	.298 (7.6)	.136 (3.5)
28	6-32	1.562 (39.7)	2.000 (50.8)	.438 (11.1)	.153 (3.9)
32	6-32	1.750 (44.5)	2.312 (58.7)	.562 (14.3)	.153 (3.9)
36	6-32	1.938 (49.2)	2.500 (63.5)	.562 (14.3)	.153 (3.9)
37	4-40	1.187 (30.1)	1.500 (38.1)	.314 (8.0)	.136 (3.5)
61	4-40	1.437 (36.5)	1.812 (46.0)	.376 (9.6)	.136 (3.5)

* Shell Size 6 - Available in M85528/3 only.

Application Notes:

1. For complete dimensions see applicable Military Specification.
2. Metric dimensions (mm) are indicated in parentheses.



This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn