

查询"CTCDRH2D18E-4R7N"供应商

CTCDRH2D18 Series

From 2.2 μH to 47 μH 

CHARACTERISTICS

Description: SMD (shielded) power inductor**Applications:** Power supplies for VTR, OA equipment, LCD televisions, PC notebooks, portable communication equipment, DC/DC converters, etc.**Operating Temperature:** -30°C to +100°C**Rated DC Current:** The rated D.C. current indicates the value of current when the inductance is 65% more than its nominal value and temperature rising $\Delta T=40^\circ\text{C}$ lower at D.C. superposition**Inductance Tolerance:** $\pm 30\%$ **Testing:** Tested on a HP4285A at 100 KHz, 0.25Vrms, 0Adc**Packaging:** Tape & Reel**Marking:** Parts are marked with inductance code or letter identifier.**Miscellaneous:** RoHS Compliant available**Additional Information:** Additional electrical & physical information available upon request**Samples available.** See website for ordering information.

SPECIFICATIONS


Part are available in $\pm 30\%$ tolerance only

CTCDRH2D18E Please specify "F" for RoHS Compliant


Part Number	Inductance (μH)	L Test Freq. (kHz)	DCR Max. (m Ω)	Rated DC Current (mA)
CTCDRH2D18_-2R2N	2.2	100	43	850
CTCDRH2D18_-3R3N	3.3	100	60	770
CTCDRH2D18_-4R7N	4.7	100	81	630
CTCDRH2D18_-6R8N	6.8	100	108	570
CTCDRH2D18_-100N	10	100	201	450
CTCDRH2D18_-150N	15	100	227	350
CTCDRH2D18_-220N	22	100	331	300
CTCDRH2D18_-330N	33	100	481	230
CTCDRH2D18_-470N	47	100	660	200

PHYSICAL DIMENSIONS

Size	A	B	C	D	E	F Max.
mm	3.2	3.2	1.0	2.1	3.5	2.0
inches	0.126	0.126	0.04	0.08	0.14	0.078

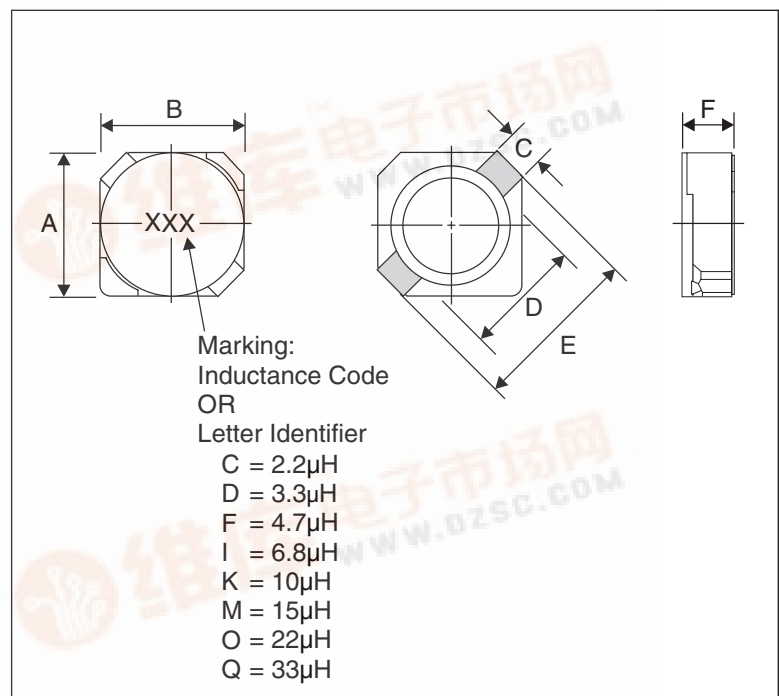

PAD LAYOUT

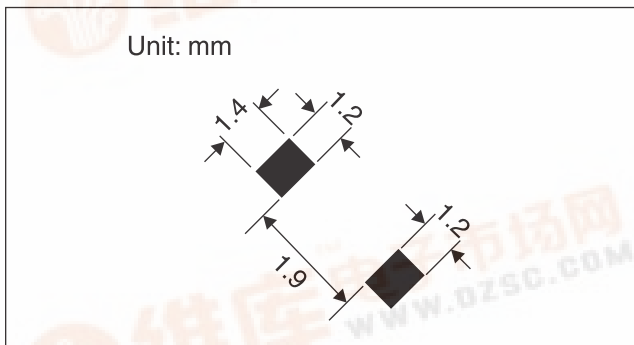

03.16.07

Manufacturer of Passive and Discrete Semiconductor Components

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2007 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice

