


查询"CTM1F-681K"供应商

CTM1F Series

From .022 μH to 1,000 μH

ENGINEERING KIT #1F

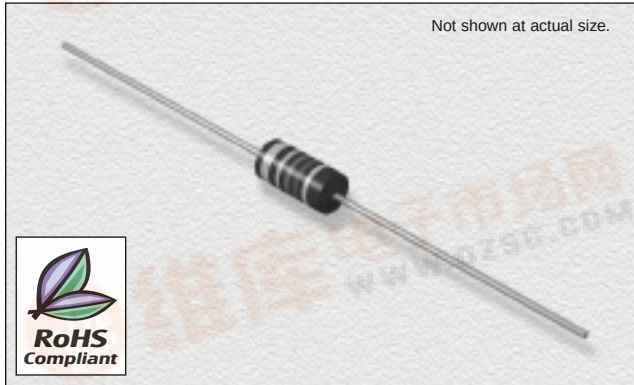


CHARACTERISTICS

Description: Axial leaded molded inductor**Applications:** Used for various kinds of OSC and TRAP coils. Ideal for various RF applications**Operating Temperature:** -55°C to +105°C**Inductance Tolerance:** $\pm 5\%$, $\pm 10\%$ & $\pm 20\%$ **Testing:** Inductance and Q are tested on an HP4285A or HP4286A at specified frequency**Packaging:** Bulk pack or Tape & Reel, 5,000 parts per reel**Marking:** Five band EIA color code indicating inductance code and tolerance**Material:** Molded epoxy resin over coil**Core:** Magnetic core (ferrite or iron) except for values 0.022 μH to 1.0 μH (phenolic)**Miscellaneous:** RoHS Compliant.**Additional Information:** Additional electrical & physical information available upon request**Samples available. See website for ordering information.**

PHYSICAL DIMENSIONS

Size	A	B	C Typ.	24 AWG Nom.
mm	6.35 $\pm$ 0.25	2.41 $\pm$ 0.25	26.7	0.511
inches	0.25 $\pm$ 0.01	0.1 $\pm$ 0.01	1.05	0.02

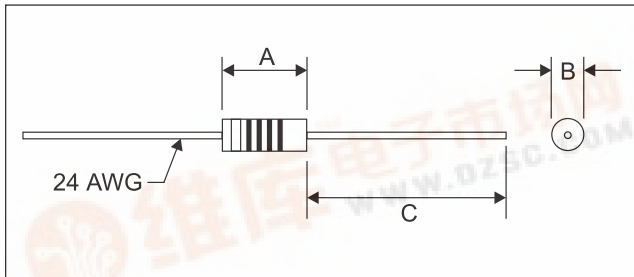

SPECIFICATIONS

Please specify tolerance code when ordering.
CTM1F-R027_ J = $\pm 5\%$, K = $\pm 10\%$, M = $\pm 20\%$

Part Number	Inductance (μH)	L Test Freq. (MHz)	Q Factor Min.	Q Test Freq. (MHz)	SRF Min. (MHz)	DCR Max. (Ω)	Rated DC (mA)
CTM1F-R022M	.022	50	50	50	900	.02	2400
CTM1F-R027_	.027	25	40	25	875	.03	2200
CTM1F-R033_	.033	25	40	25	850	.03	2000
CTM1F-R039_	.039	25	40	25	825	.04	1900
CTM1F-R047_	.047	25	40	25	800	.04	1800
CTM1F-R056_	.056	25	40	25	775	.05	1700
CTM1F-R068_	.068	25	40	25	750	.06	1500
CTM1F-R082_	.082	25	40	25	725	.07	1400
CTM1F-R10_	.10	25	40	25	680	.08	1350
CTM1F-R12_	.12	25	40	25	640	.09	1270
CTM1F-R15_	.15	25	38	25	600	.10	1200
CTM1F-R18_	.18	25	35	25	550	.12	1105
CTM1F-R22_	.22	25	33	25	510	.14	1025
CTM1F-R27_	.27	25	33	25	430	.16	960
CTM1F-R33_	.33	25	30	25	410	.22	815
CTM1F-R39_	.39	25	30	25	365	.30	700
CTM1F-R47_	.47	25	30	25	330	.35	650
CTM1F-R56_	.56	25	30	25	300	.50	545
CTM1F-R68_	.68	25	28	25	275	.60	495
CTM1F-R82_	.82	25	28	25	250	.85	415
CTM1F-1R0_	1.0	25	25	25	230	1.0	385
CTM1F-1R2_	1.2	7.9	25	7.9	150	.18	590
CTM1F-1R5_	1.5	7.9	28	7.9	140	.22	535
CTM1F-1R8_	1.8	7.9	30	7.9	125	.30	455
CTM1F-2R2_	2.2	7.9	30	7.9	115	.40	395
CTM1F-2R7_	2.7	7.9	37	7.9	100	.55	355
CTM1F-3R3_	3.3	7.9	45	7.9	90	.85	270
CTM1F-3R9_	3.9	7.9	45	7.9	80	1.0	250
CTM1F-4R7_	4.7	7.9	45	7.9	75	1.2	230
CTM1F-5R6_	5.6	7.9	50	7.9	65	1.8	185
CTM1F-6R8_	6.8	7.9	50	7.9	60	2.0	175
CTM1F-8R2_	8.2	7.9	55	7.9	55	2.7	155
CTM1F-100_	10	7.9	55	7.9	50	3.7	130
CTM1F-120_	12	2.5	45	2.5	40	2.7	155
CTM1F-150_	15	2.5	40	2.5	35	2.8	150
CTM1F-180_	18	2.5	50	2.5	30	3.1	145
CTM1F-220_	22	2.5	50	2.5	25	3.3	140
CTM1F-270_	27	2.5	50	2.5	20	3.5	135
CTM1F-330_	33	2.5	45	2.5	24	3.4	130
CTM1F-390_	39	2.5	45	2.5	22	3.6	125
CTM1F-470_	47	2.5	45	2.5	20	4.5	110
CTM1F-560_	56	2.5	45	2.5	18	5.7	100
CTM1F-680_	68	2.5	50	2.5	15	6.7	92
CTM1F-820_	82	2.5	50	2.5	14	7.3	88
CTM1F-101_	100	2.5	50	2.5	13	8.0	84
CTM1F-121_	120	.79	30	.79	12	13	66
CTM1F-151_	150	.79	30	.79	11	15	61
CTM1F-181_	180	.79	30	.79	10	17	57
CTM1F-221_	220	.79	30	.79	9.0	21	52
CTM1F-271_	270	.79	30	.79	8.0	25	47
CTM1F-331_	330	.79	30	.79	7.0	28	45
CTM1F-391_	390	.79	30	.79	6.5	35	40
CTM1F-471_	470	.79	30	.79	6.0	42	36
CTM1F-561_	560	.79	30	.79	5.0	46	35
CTM1F-681_	680	.79	30	.79	4.0	60	30
CTM1F-821_	820	.79	30	.79	3.8	65	29
CTM1F-102_	1000	.79	30	.79	3.4	72	28

12.27.05

Manufacturer of Inductors, Chokes, Coils, Beads, Transformers & Toroids

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2005 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice

