

查询"CTCDRH3D16F-6R8N"供应商

CTCDRH3D16 Series

From 1.5 μH to 100 μH 

CHARACTERISTICS

Description: SMD (shielded) power inductor**Applications:** Power supplies for VTR, OA equipment, LCD televisions, PC notebooks, portable communication equipment, DC/DC converters, etc.**Operating Temperature:** -30°C to +100°C**Inductance Tolerance:** $\pm 30\%$ **Testing:** Tested on a HP4285A at 100kHz**Packaging:** Tape & Reel**Marking:** Parts are marked with inductance code**Miscellaneous:** RoHS Compliant available**Additional Information:** Additional electrical & physical information available upon request**Samples available.** See website for ordering information.

SPECIFICATIONS

Parts are available in $\pm 30\%$ tolerance only.


CTCDRH3D16E Please specify "F" for RoHS Compliant

Part Number	Inductance @ 0.25Vrms, 0Adc ($\mu\text{H} \pm 30\%$)	L Test Freq. (kHz)	DCR Max. (Ω)	*Rated DC Current (A)
CTCDRH3D16_-1R5N	1.5	100	.052	1.55
CTCDRH3D16_-2R2N	2.2	100	.072	1.20
CTCDRH3D16_-3R3N	3.3	100	.085	1.10
CTCDRH3D16_-4R7N	4.7	100	.105	0.90
CTCDRH3D16_-6R8N	6.8	100	.170	0.73
CTCDRH3D16_-100N	10	100	.210	0.55
CTCDRH3D16_-150N	15	100	.295	0.45
CTCDRH3D16_-220N	22	100	.430	0.40
CTCDRH3D16_-330N	33	100	.675	0.32
CTCDRH3D16_-470N	47	100	.940	0.22
CTCDRH3D16_-680N	68	100	1.28	0.20
CTCDRH3D16_-820N	82	100	1.55	0.17
CTCDRH3D16_-101N	100	100	1.75	0.15


*The rated current indicates the current when the inductance decreases to 65% over its nominal value or D.C. current when the temperature rising $\Delta T=40^\circ\text{C}$ lower, whichever is lower.

PHYSICAL DIMENSIONS

Size	A Max.	B Max.	C Max.	D	E	F
mm	4.1	4.1	1.8	1.15	5.2	2.95
inches	0.16	0.16	0.07	0.05	0.20	0.12

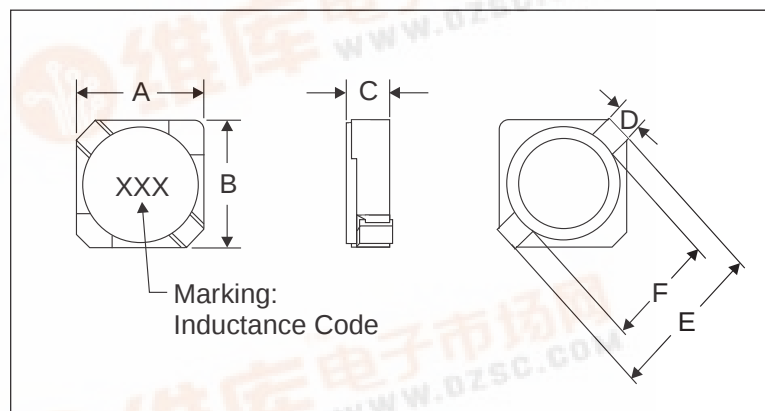

PAD LAYOUT

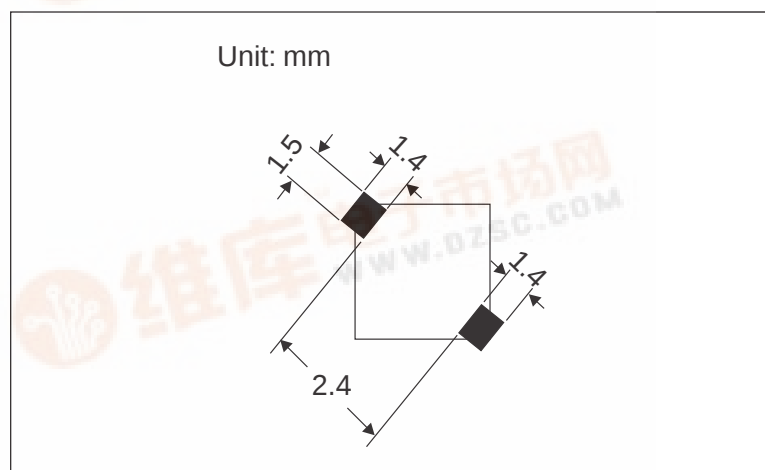

11.03.05

Manufacturer of Inductors, Chokes, Coils, Beads, Transformers & Toroids

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2005 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice