

[查询"MAX4890E"供应商](#)

1000 Base-T, $\pm 15\text{kV}$ ESD Protection LAN Switches

General Description

The MAX4890E/MAX4892E meet the needs of high-speed differential switching. The devices handle the needs of Gigabit Ethernet (10/100/1000) Base-T switching as well as LVDS and LVPECL switching. The MAX4890E/MAX4892E provide enhanced ESD protection up to $\pm 15\text{kV}$, and excellent high-frequency response, making the devices especially useful for interfaces that must go to an outside connection.


Both devices provide extremely low capacitance (C_{ON}), as well as low resistance (R_{ON}), for low-insertion loss and very wide bandwidth. In addition to the four pairs of DPDT switches, the MAX4892E provides LED switching for laptop computer/docking station use.

The MAX4890E/MAX4892E are pin-for-pin equivalents to the MAX4890/MAX4892 and can replace these devices for those applications requiring the enhanced ESD protection. Both devices are available in space-saving TQFN packages and operate over the standard -40°C to $+85^\circ\text{C}$ temperature range.

Applications

Notebooks and Docking Stations
Servers and Routers with Ethernet Interfaces
Board-Level Redundancy Protection
SONET/SDH Signal Routing
T3/E3 Redundancy Protection
LVDS and LVPECL Switching

Pin Configurations

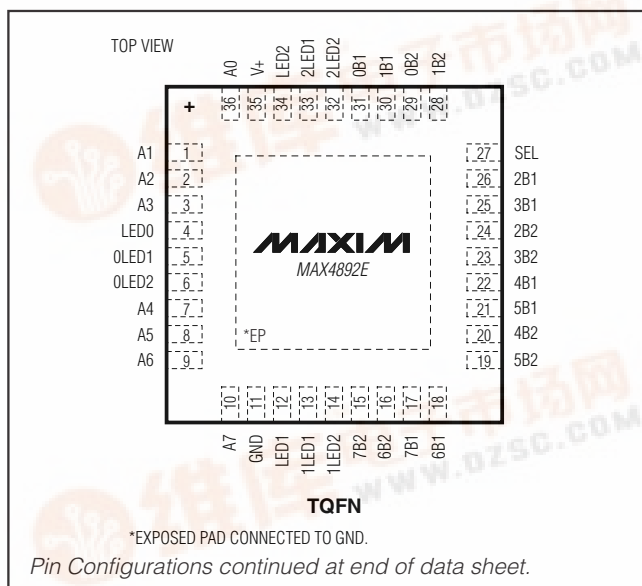

Features

- ◆ $\pm 15\text{kV}$ ESD Protected Per MIL-STD-883, Method 3015
- ◆ Single +3.0V to +3.6V Power-Supply Voltage
- ◆ Low On-Resistance (R_{ON}): 4Ω (typ), 6.5Ω (max)
- ◆ Ultra-Low On-Capacitance (C_{ON}): 8pF (typ)
- ◆ -23dB Return Loss (100MHz)
- ◆ -3dB Bandwidth: 650MHz
- ◆ Optimized Pin Out for Easy Transformer and PHY Interface
- ◆ Built-In LED Switches for Switching Indicators to Docking Station (MAX4892E)
- ◆ Low $450\mu\text{A}$ (max) Quiescent Current
- ◆ Bidirectional 8 to 16 Multiplexer/Demultiplexer
- ◆ Standard Pin Out, Matching the MAX4890 and MAX4892
- ◆ Space-Saving Lead-Free Packages
32-Pin, 5mm x 5mm, TQFN Package
36-Pin, 6mm x 6mm, TQFN Package

Ordering Information


PART	PIN-PACKAGE	LED SWITCHES	PKG CODE
MAX4890EETJ+	32 TQFN-EP*	—	T-3255-4
MAX4892EETX+	36 TQFN-EP*	3	T-3666-3

+Denotes lead-free package.

Note: All devices are specified over the -40°C to $+85^\circ\text{C}$ operating temperature range.

*EP = Exposed pad.

Eye Diagram

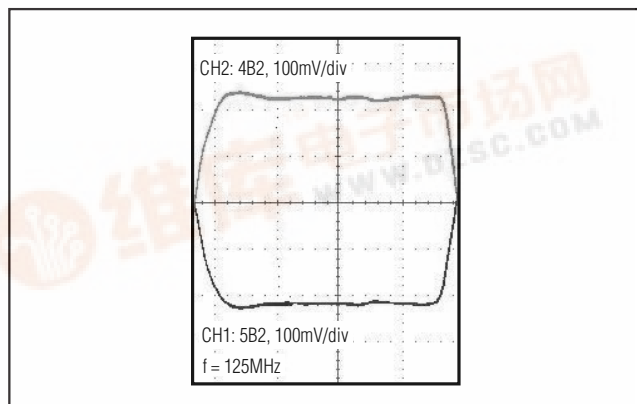

Typical Operating Circuit and Functional Diagrams appear at end of data sheet.

MAXIM

Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

MAX4890E/MAX4892E



1000 Base-T, ±15kV ESD Protection LAN Switches

MAX4890E/MAX4892E

ABSOLUTE MAXIMUM RATINGS

V+ -0.3V to +4V
 All Other Pins -0.3V to (V+ + 0.3V)
 Continuous Current (A_ to _B_) ±120mA
 Continuous Current (LED_ to _LED_) ±40mA
 Peak Current (A_ to _B_) ±240mA
 (pulsed at 1ms, 10% duty cycle)
 Current into Any Other Pin ±20mA
 Continuous Power Dissipation (T_A = +70°C)
 32-Pin TQFN (derate 34.5mW/°C above +70°C) 2.76W
 36-Pin TQFN (derate 35.7mW/°C above +70°C) 2.85W
 ESD Protection, Human Body Model ±15kV

Operating Temperature Range -40°C to +85°C
 Junction Temperature +150°C
 Storage Temperature Range -65°C to +150°C
 Lead Temperature (soldering, 10s) +300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V+ = +3V to +3.6V, T_A = T_J = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at V+ = 3.3V, T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
ANALOG SWITCH							
On-Resistance	R _{ON}	V+ = 3V, I _{A_} = -40mA, V _{A_} = 0, 1.5V, 3V	T _A = +25°C		4	5.5	Ω
			T _{MIN} to T _{MAX}			6.5	
On-Resistance LED Switches	R _{ONLED}	V+ = 3V, I _{LED_} = -40mA, V _{LED_} = 0, 1.5V, 3V (MAX4892E)				40	Ω
On-Resistance Match Between Channels	ΔR _{ON}	V+ = 3V, I _{A_} = -40mA, V _{A_} = 0, 1.5V, 3V (Note 2)	T _A = +25°C		0.5	1.5	Ω
			T _{MIN} to T _{MAX}			2	
On-Resistance Flatness	R _{FLAT(ON)}	V+ = 3V, I _{A_} = -40mA, V _{A_} = 1.5V, 3V			0.01		Ω
Off-Leakage Current	I _{LA_(OFF)}	V+ = 3.6V, V _{A_} = 0.3V, 3.3V; V _{B1} or V _{B2} = 3.3V, 0.3V		-1		+1	μA
On-Leakage Current	I _{LA_(ON)}	V+ = 3.6V, V _{A_} = 0.3V, 3.3V; V _{B1} or V _{B2} = 0.3V, 3.3V or floating		-1		+1	
ESD PROTECTION							
ESD Protection		Human Body Model (spec MIL-STD-883, Method 3015)			±15		kV
SWITCH AC PERFORMANCE							
Insertion Loss	I _{LOS}	R _S = R _L = 50Ω, unbalanced, f = 1MHz, (Note 2)			0.6		dB
Return Loss	R _{LOS}	f = 100MHz			-23		dB

1000 Base-T ±15kV ESD Protection LAN Switch

MAX4890E/MAX4892E

ELECTRICAL CHARACTERISTICS (continued)

(V+ = +3V to +3.6V, T_A = T_J = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at V+ = 3.3V, T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Crosstalk	V _{CT1}	Any switch to any switch; R _S = R _L = 50Ω, unbalanced, Figure 1	f = 25MHz		-50		dB
	V _{CT2}		f = 125MHz		-26		
SWITCH AC CHARACTERISTIC							
-3dB Bandwidth	BW	R _S = R _L = 50Ω, unbalanced			650		MHz
Off-Capacitance	C _{OFF}	f = 1MHz, _B_, A_			3.5		pF
On-Capacitance	C _{ON}	f = 1MHz, _B_, A_			6.5		pF
Turn-On Time	t _{ON}	V _{A_} = 1V, R _L , 100Ω, Figure 2				50	ns
Turn-Off Time	t _{OFF}	V _{A_} = 1V, R _L , 100Ω, Figure 2				50	ns
Propagation Delay	t _{PLH} , t _{PHL}	R _S = R _L = 50Ω, unbalanced, Figure 3			0.1		ns
Output Skew Between Ports	t _{SK(o)}	Skew between any two ports, Figure 4			0.01		ns
SWITCH LOGIC							
Input-Voltage Low	V _{IL}	V+ = 3.0V				0.8	V
Input-Voltage High	V _{IH}	V+ = 3.6V		2.0			
Input-Logic Hysteresis	V _{HYST}	V+ = 3.3V			100		mV
Input Leakage Current	I _{SEL}	V+ = 3.6V, V _{SEL} = 0 or V+		-5		+5	μA
Operating Supply-Voltage Range	V+			3.0		3.6	V
Quiescent Supply Current	I+	V+ = 3.6V, V _{SEL} = 0 or V+			280	450	μA

Note 1: Specifications at -40°C are guaranteed by design.






Note 2: Guaranteed by design.

[查询"MAX4890E"供应商](#)

1000 Base-T, ±15kV ESD Protection LAN Switches

Typical Operating Characteristics

(V+ = 3.3V, T_A = +25°C, unless otherwise noted.)

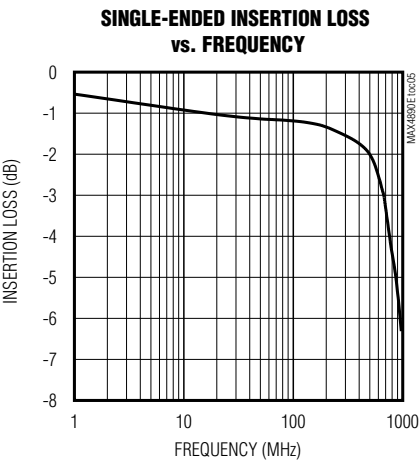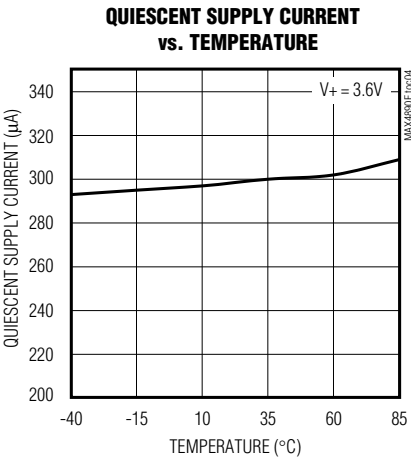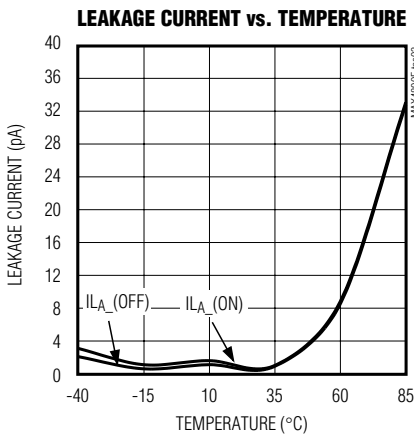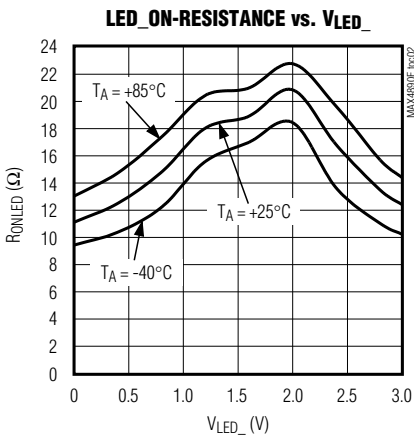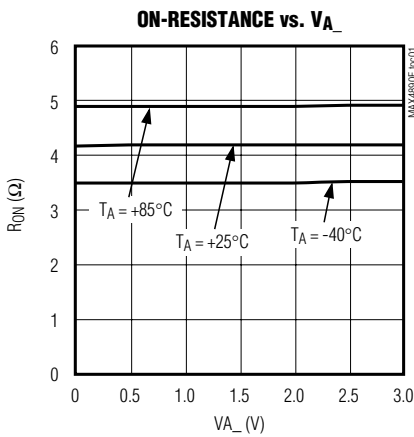

1000 Base-T ±15kV ESD Protection LAN Switch

Pin Description

PIN		NAME	FUNCTION
MAX4892E	MAX4890E		
1	32	A1	Differential PHY Interface Pair. Connect to the Ethernet PHY.
2	1	A2	Differential PHY Interface Pair. Connect to the Ethernet PHY.
3	2	A3	Differential PHY Interface Pair. Connect to the Ethernet PHY.
4	—	LED0	LED0 Input
5	—	0LED1	0LED1 Output. Drive SEL low (SEL = 0) to connect LED0 to 0LED1.
6	—	0LED2	0LED2 Output. Drive SEL high (SEL = 1) to connect LED0 to 0LED2.
7	7	A4	Differential PHY Interface Pair. Connect to the Ethernet PHY.
8	8	A5	Differential PHY Interface Pair. Connect to the Ethernet PHY.
9	9	A6	Differential PHY Interface Pair. Connect to the Ethernet PHY.
10	10	A7	Differential PHY Interface Pair. Connect to the Ethernet PHY.
11	11	GND	Ground
12	—	LED1	LED1 Input
13	—	1LED1	1LED1 Output. Drive SEL low (SEL = 0) to connect LED1 to 1LED1.
14	—	1LED2	1LED2 Output. Drive SEL high (SEL = 1) to connect LED1 to 1LED2.
15	13	7B2	B2 Differential Pair
16	14	6B2	B2 Differential Pair
17	15	7B1	B1 Differential Pair
18	16	6B1	B1 Differential Pair
19	17	5B2	B2 Differential Pair
20	18	4B2	B2 Differential Pair
21	19	5B1	B1 Differential Pair
22	20	4B1	B1 Differential Pair
23	21	3B2	B2 Differential Pair
24	22	2B2	B2 Differential Pair
25	23	3B1	B1 Differential Pair
26	24	2B1	B1 Differential Pair
27	29	SEL	Select Input. SEL selects switch connection. See the Truth Table (Table1).
28	25	1B2	B2 Differential Pair
29	26	0B2	B2 Differential Pair
30	27	1B1	B1 Differential Pair
31	28	0B1	B1 Differential Pair
32	—	2LED2	2LED2 Output. Drive SEL high (SEL = 1) to connect LED2 to 2LED2.
33	—	2LED1	2LED1 Output. Drive SEL low (SEL = 0) to connect LED2 to 2LED1.
34	—	LED2	LED2 Input
35	30	V+	Positive-Supply Voltage Input. Bypass to GND with a 0.1μF ceramic capacitor.
36	31	A0	Differential PHY Interface Pair. Connect to the Ethernet PHY.
—	3-6, 12	N.C.	No Connection. Not internally connected.
—	—	EP	Exposed Pad. Connect exposed pad to GND or leave it unconnected.

MAX4890E/MAX4892E

1000 Base-T, $\pm 15\text{kV}$ ESD Protection LAN Switches

MAX4890E/MAX4892E

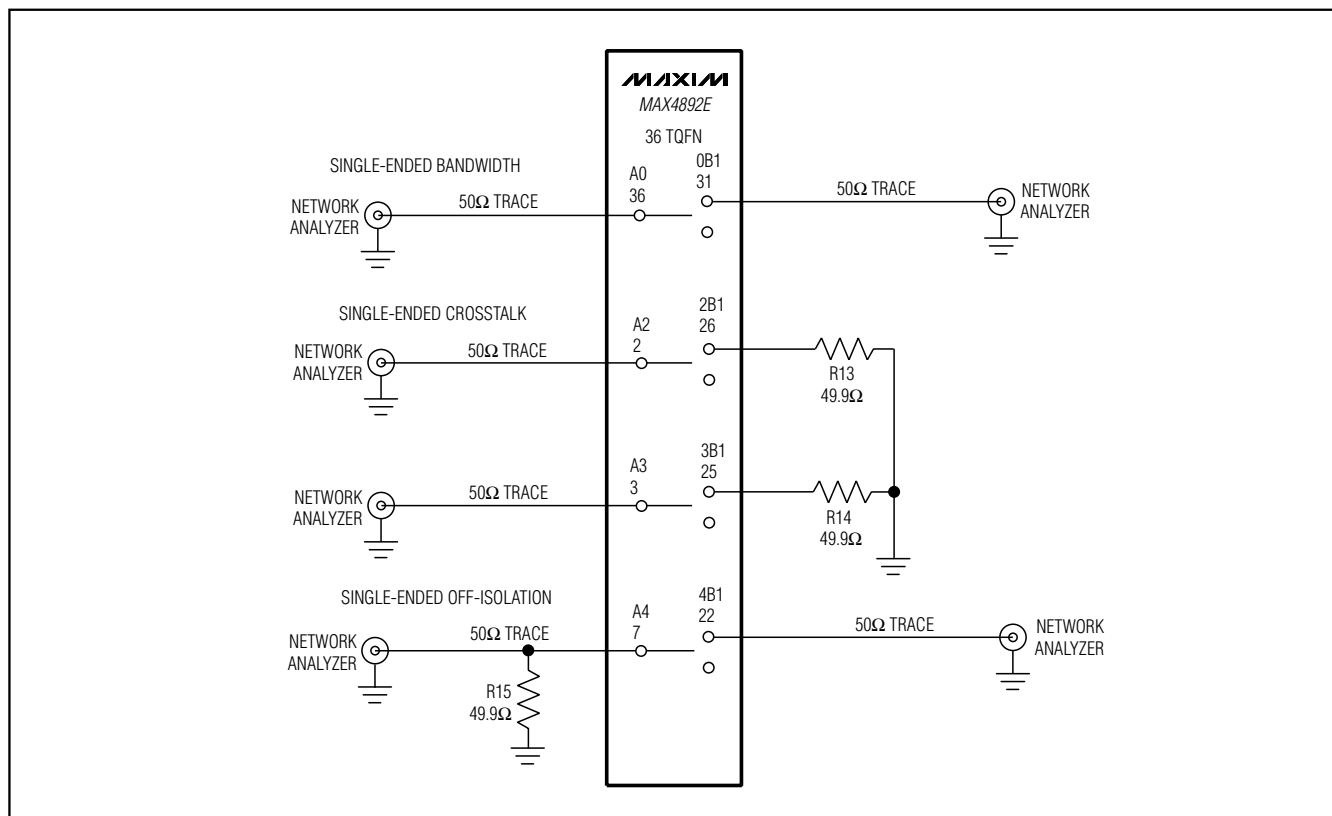


Figure 1. Single-Ended Bandwidth, Crosstalk, and Off-Isolation

Detailed Description

The MAX4890E/MAX4892E are high-speed analog switches targeted for 1000 Base-T applications. In a typical application, the MAX4890E/MAX4892E switch the signals from two separate interface transformers and connect the signals to a single 1000 Base-T Ethernet PHY (see the *Typical Operating Circuit*). This configuration simplifies docking station design by avoiding signal reflections associated with unterminated transmission lines in a T configuration. The MAX4890E/MAX4892E are protected against $\pm 15\text{kV}$ electrostatic discharge (ESD) shocks. The MAX4892E also includes LED switches that allow the LED output signals to be routed to a docking station along with the Ethernet signals. See the *Functional Diagrams*.

With their low resistance and capacitance, as well as high ESD protection, the MAX4890E/MAX4892E can be used to switch most low-voltage differential signals,

such as LVDS, SEREDES, and LVPECL, as long as the signals do not exceed maximum ratings of the devices.

The MAX4890E/MAX4892E switches provide an extremely low capacitance and on-resistance to meet Ethernet insertion and return-loss specifications. The MAX4892E features three built-in LED switches.

The MAX4890E/MAX4892E incorporate a unique architecture design utilizing only n-channel switches within the main Ethernet switch, reducing I/O capacitance and channel resistance. An internal two-stage charge pump with a nominal output of 7.5V provides the high voltage needed to drive the gates of the n-channel switches while maintaining a consistently low R_{ON} throughout the input signal range. An internal bandgap reference set to 1.23V and an internal oscillator running at 2.5MHz provide proper charge-pump operation. Unlike other charge-pump circuits, the MAX4890E/MAX4892E include internal flyback capacitors, reducing design time, board space, and cost.

1000 Base-T, $\pm 15\text{kV}$ ESD Protection LAN Switches

Table 1. Truth Table

SEL	CONNECTION
0	A_ to _B1, LED_ to _LED1
1	A_ to _B2, LED_ to _LED2

Digital Control Inputs

The MAX4890E/MAX4892E provide a single digital control SEL. SEL controls the switches as well as the LED switches as shown in Table 1.

Analog Signal Levels

The on-resistance of the MAX4890E/MAX4892E is very low and stable as the analog input signals are swept from ground to V+ (see the *Typical Operating Characteristics*). The switches are bidirectional, allowing A_ and _B_ to be configured as either inputs or outputs.

ESD Protection

The MAX4890E/MAX4892E are characterized using the Human Body Model for $\pm 15\text{kV}$ of ESD protection. Figure 5 shows the Human Body Model. This model consists of a 100pF capacitor charged to the ESD voltage of interest which is then discharged into the test device through a 1.5k Ω resistor. All signal and control pins are ESD protected to $\pm 15\text{kV}$ HBM (Human Body Model).

Applications Information

Typical Operating Circuit

The *Typical Operating Circuit* shows the MAX4890E/MAX4892E in a 1000 Base-T docking station application.

Power-Supply Sequencing and Overvoltage Protection

Caution: Do not exceed the absolute maximum ratings. Stresses beyond the listed ratings may cause permanent damage to the device.

Proper power-supply sequencing is recommended for all CMOS devices. Always apply V+ before applying analog signals, especially if the analog signal is not current limited.

Layout

High-speed switches require proper layout and design procedures for optimum performance. Keep design-controlled-impedance pc board traces as short as possible. Ensure that bypass capacitors are as close as possible to the device. Use large ground planes where possible.

Chip Information

PROCESS: BiCMOS

1000 Base-T, ±15kV ESD Protection LAN Switches

MAX4890E/MAX4892E

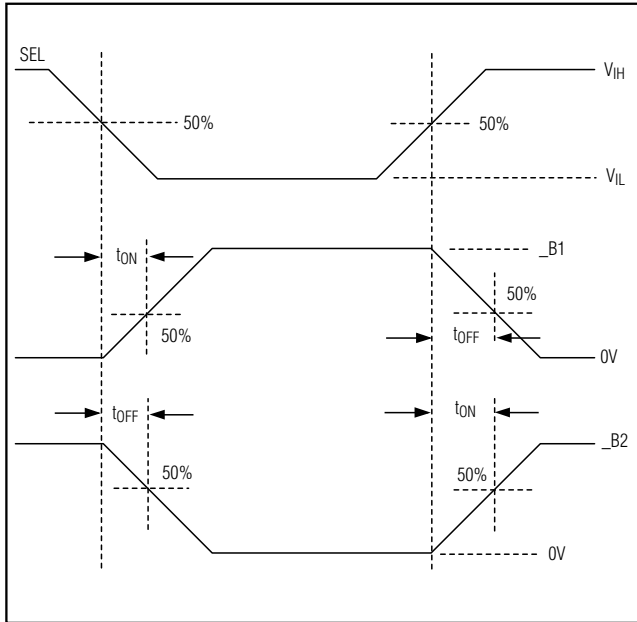


Figure 2. Turn-On and Turn-Off Times

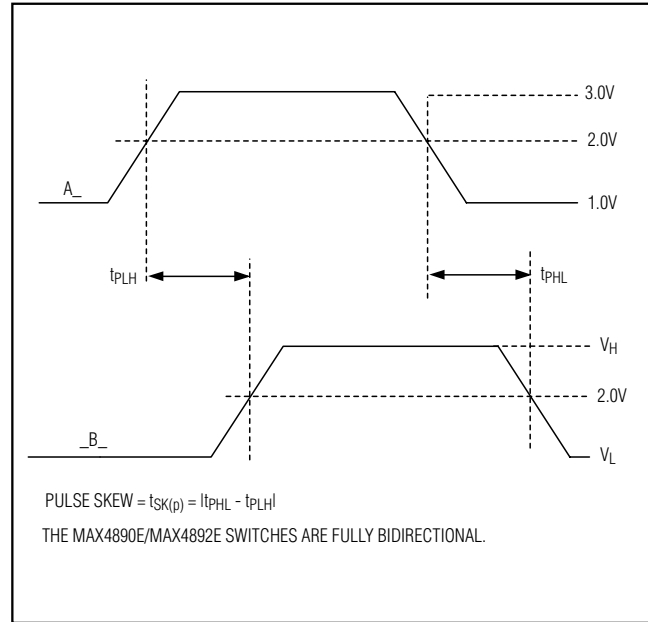


Figure 3. Propagation Delay Times

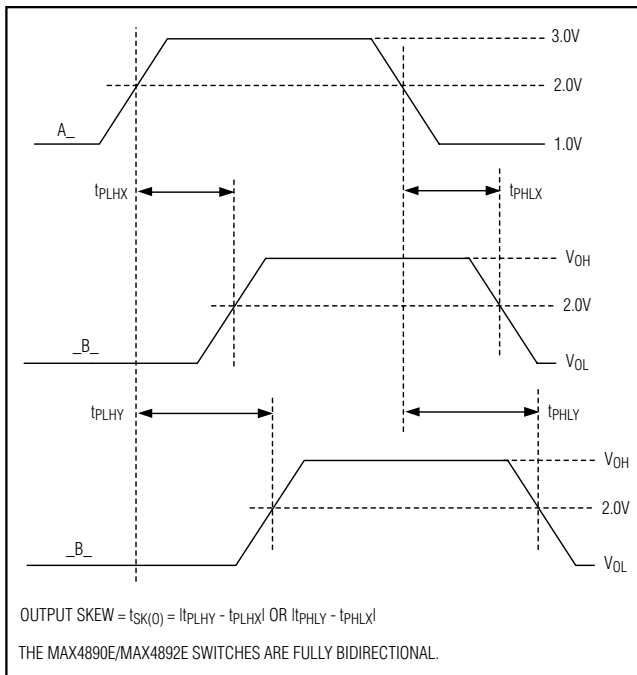


Figure 4. Output Skew


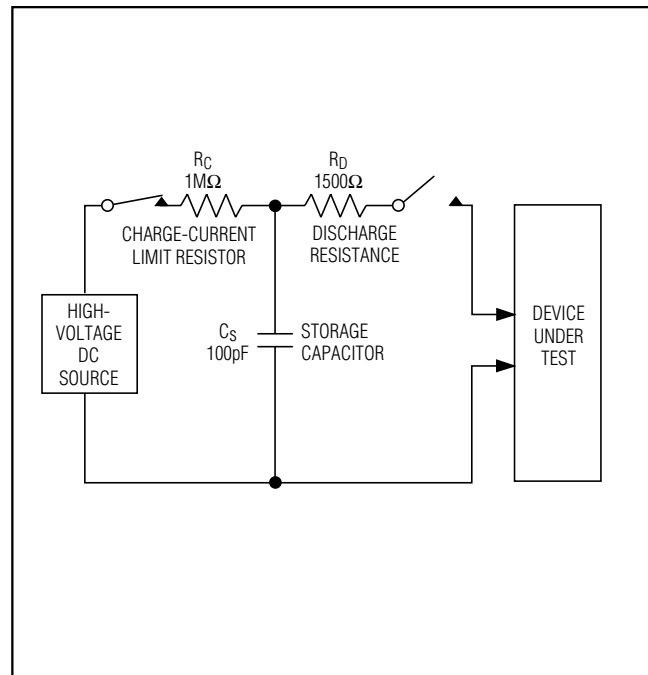


Figure 5. Human Body ESD Test Model (MIL-STD-883, Method 3015)

1000 Base-T, $\pm 15\text{kV}$ ESD Protection LAN Switches

Typical Operating Circuit



MAX4890E/MAX4892E

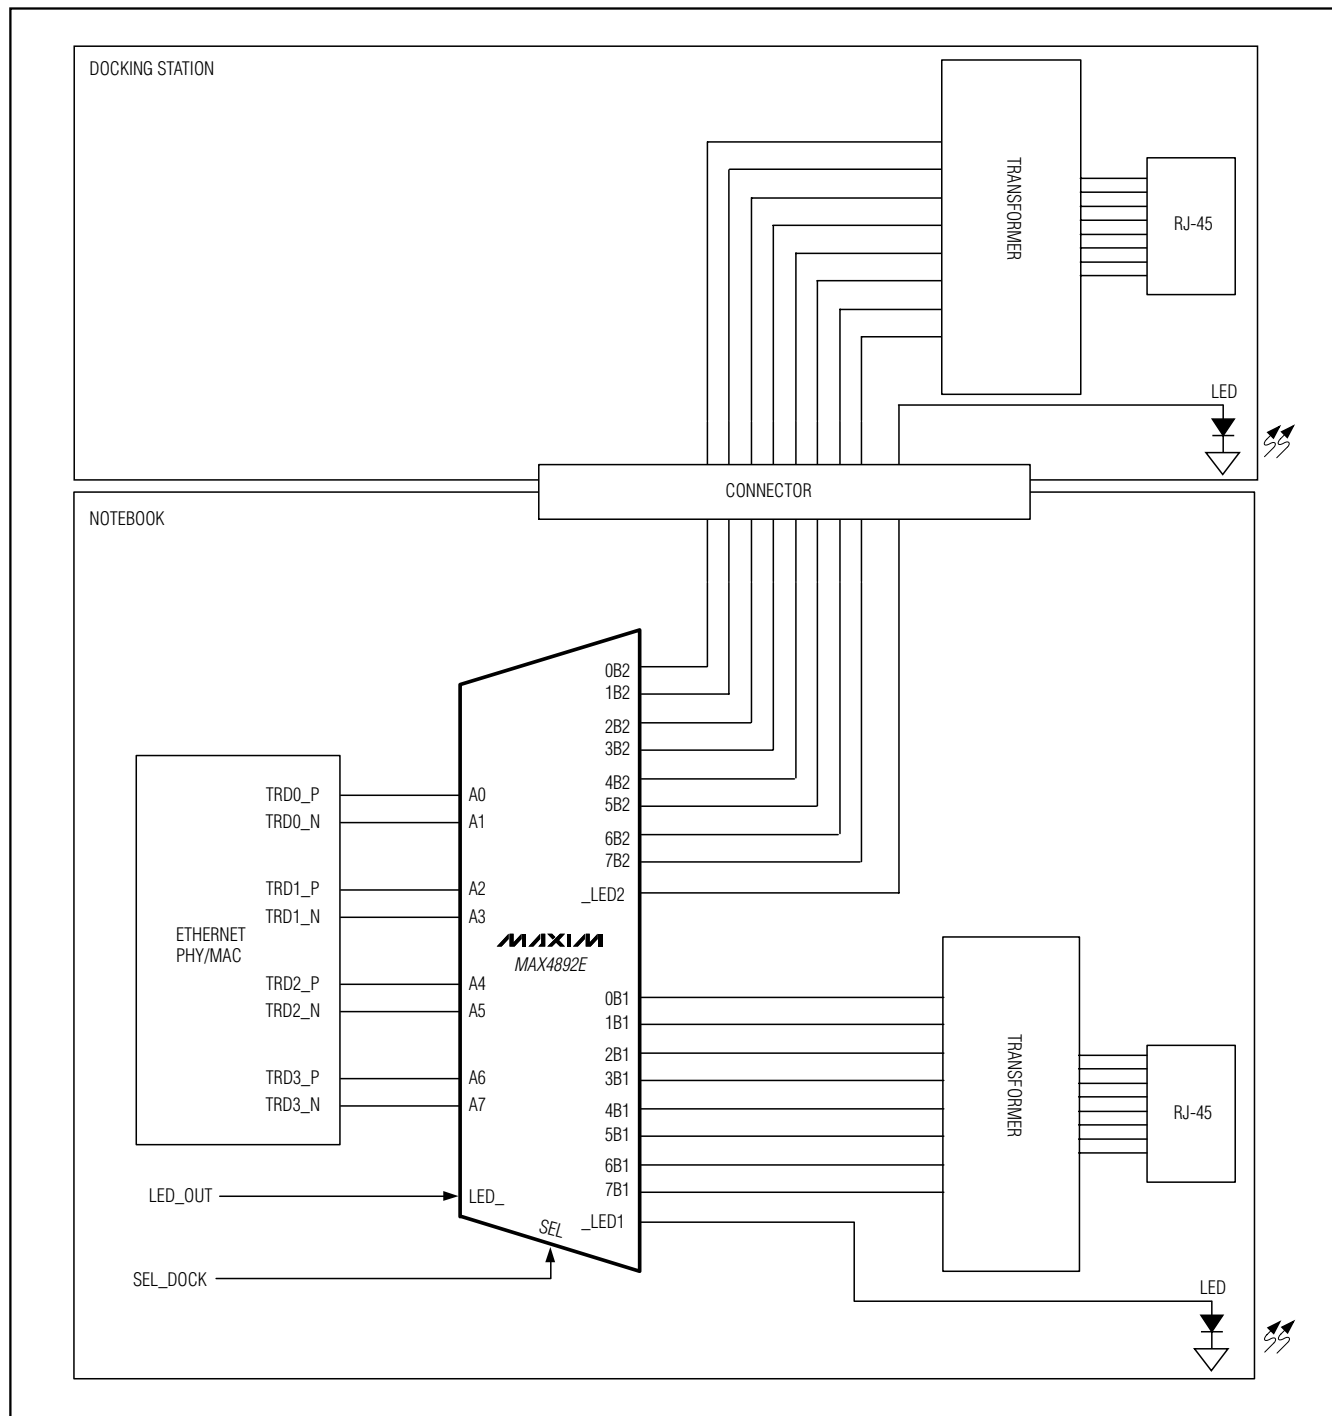

1000 Base-T, $\pm 15\text{kV}$ ESD Protection LAN Switches


MAX4890E/MAX4892E

Functional Diagrams

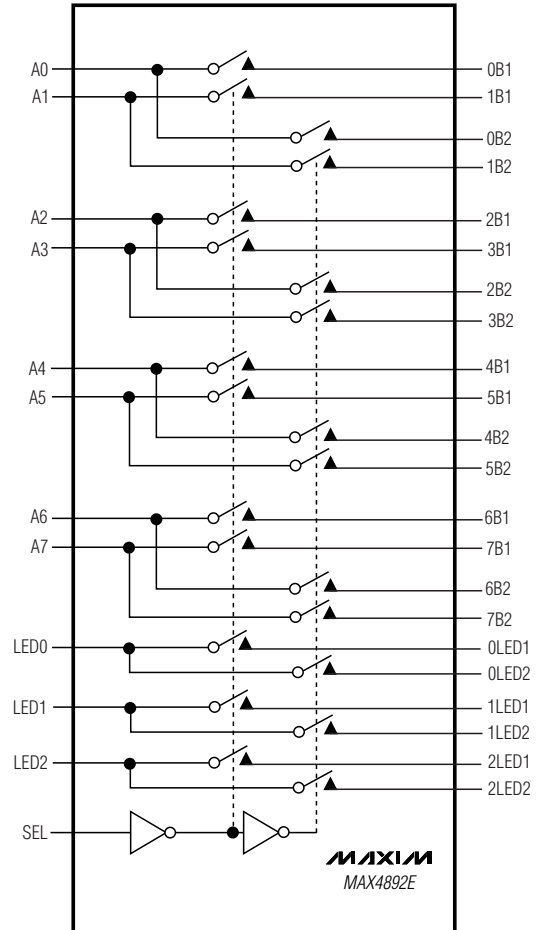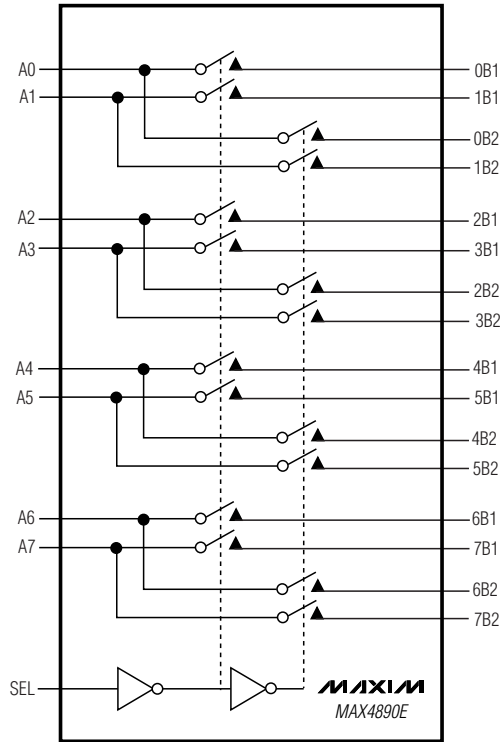

1000 Base-T, $\pm 15\text{kV}$ ESD Protection LAN Switches

Pin Configurations (continued)

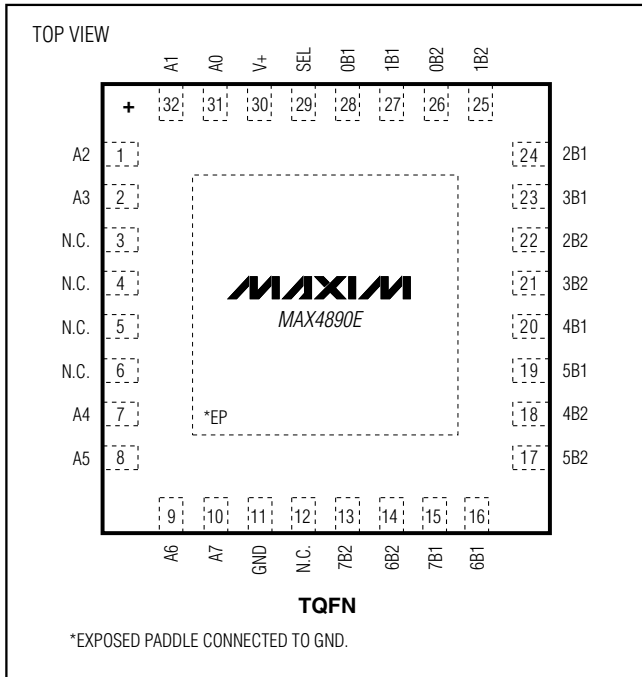

MAX4890E/MAX4892E

Package Information

The drawing illustrates the mechanical specifications of a 32-pin Quad Flat Pack (QFN) package. It includes four main views: TOP VIEW, BOTTOM VIEW, SIDE VIEW, and DETAIL A. The TOP VIEW shows a square package with dimensions D (width) and E (height), with a central square of side D/2. A shaded rectangular area in the bottom-left corner is labeled 'MARKING' and contains the text 'AAAAA'. The bottom edge features 32 pins, numbered 1 to 32, with a pin diameter of 0.35x45°. The BOTTOM VIEW shows the underside of the package with dimensions D2, E2, and E2/2, and a central square of side D2/2. A detail of a pin is shown with a diameter of 0.10. The SIDE VIEW shows the package profile with a seating plane and a maximum height of 0.08. DETAIL A shows a cross-section of the package with dimensions L, E, and E/2, and a pin diameter of 0.10. The package is labeled 'DALLAS SEMICONDUCTOR' and 'MAXIM'.

TOP VIEW

BOTTOM VIEW

SIDE VIEW

DETAIL A

DETAIL B

DETAIL C

DETAIL D

DETAIL E

DETAIL F

DETAIL G

DETAIL H

DETAIL I

DETAIL J

DETAIL K

DETAIL L

DETAIL M

DETAIL N

DETAIL O

DETAIL P

DETAIL Q

DETAIL R

DETAIL S

DETAIL T

DETAIL U

DETAIL V

DETAIL W

DETAIL X

DETAIL Y

DETAIL Z

DETAIL AA

DETAIL AB

DETAIL AC

DETAIL AD

DETAIL AE

DETAIL AF

DETAIL AG

DETAIL AH

DETAIL AI

DETAIL AJ

DETAIL AK

DETAIL AL

DETAIL AM

DETAIL AN

DETAIL AO

DETAIL AP

DETAIL AQ

DETAIL AR

DETAIL AS

DETAIL AT

DETAIL AU

DETAIL AV

DETAIL AW

DETAIL AX

DETAIL AY

DETAIL AZ

DETAIL BA

DETAIL BB

DETAIL BC

DETAIL BD

DETAIL BE

DETAIL BF

DETAIL BG

DETAIL BH

DETAIL BI

DETAIL BJ

DETAIL BK

DETAIL BL

DETAIL BM

DETAIL BN

DETAIL BO

DETAIL BP

DETAIL BQ

DETAIL BR

DETAIL BS

DETAIL BT

DETAIL BU

DETAIL BV

DETAIL BW

DETAIL BX

DETAIL BY

DETAIL BZ

DETAIL CA

DETAIL CB

DETAIL CC

DETAIL CD

DETAIL CE

DETAIL CF

DETAIL CG

DETAIL CH

DETAIL CI

DETAIL CJ

DETAIL CK

DETAIL CL

DETAIL CM

DETAIL CN

DETAIL CO

DETAIL CP

DETAIL CQ

DETAIL CR

DETAIL CS

DETAIL CT

DETAIL CU

DETAIL CV

DETAIL CW

DETAIL CX

DETAIL CY

DETAIL CZ

DETAIL DA

DETAIL DB

DETAIL DC

DETAIL DD

DETAIL DE

DETAIL DF

DETAIL DG

DETAIL DH

DETAIL DI

DETAIL DJ

DETAIL DK

DETAIL DL

DETAIL DM

DETAIL DN

DETAIL DO

DETAIL DP

DETAIL DQ

DETAIL DR

DETAIL DS

DETAIL DT

DETAIL DU

DETAIL DV

DETAIL DW

DETAIL DX

DETAIL DY

DETAIL DZ

DETAIL EA

DETAIL EB

DETAIL EC

DETAIL ED

DETAIL EE

DETAIL EF

DETAIL EG

DETAIL EH

DETAIL EI

DETAIL EJ

DETAIL EK

DETAIL EL

DETAIL EM

DETAIL EN

DETAIL EO

DETAIL EP

DETAIL EQ

DETAIL ER

DETAIL ES

DETAIL ET

DETAIL EU

DETAIL EV

DETAIL EW

DETAIL EX

DETAIL EY

DETAIL EZ

DETAIL FA

DETAIL FB

DETAIL FC

DETAIL FD

DETAIL FE

DETAIL FF

DETAIL FG

DETAIL FH

DETAIL FI

DETAIL FJ

DETAIL FK

DETAIL FL

DETAIL FM

DETAIL FN

DETAIL FO

DETAIL FP

DETAIL FQ

DETAIL FR

DETAIL FS

DETAIL FT

DETAIL FU

DETAIL FV

DETAIL FW

DETAIL FX

DETAIL FY

DETAIL FZ

DETAIL GA

DETAIL GB

DETAIL GC

DETAIL GD

DETAIL GE

DETAIL GF

DETAIL GH

DETAIL GI

DETAIL GJ

DETAIL GK

DETAIL GL

DETAIL GM

DETAIL GN

DETAIL GO

DETAIL GP

DETAIL GQ

DETAIL GR

DETAIL GS

DETAIL GT

DETAIL GU

DETAIL GV

DETAIL GW

DETAIL GX

DETAIL GY

DETAIL GZ

DETAIL HA

DETAIL HB

DETAIL HC

DETAIL HD

DETAIL HE

DETAIL HF

DETAIL HG

DETAIL HH

DETAIL HI

DETAIL HJ

DETAIL HK

DETAIL HL

DETAIL HM

DETAIL HN

DETAIL HO

DETAIL HP

DETAIL HQ

DETAIL HR

DETAIL HS

DETAIL HT

DETAIL HU

DETAIL HV

DETAIL HW

DETAIL HX

DETAIL HY

DETAIL HZ

DETAIL IA

DETAIL IB

DETAIL IC

DETAIL ID

DETAIL IE

DETAIL IF

DETAIL IG

DETAIL IH

DETAIL II

DETAIL IJ

DETAIL IK

DETAIL IL

DETAIL IM

DETAIL IN

DETAIL IO

DETAIL IP

DETAIL IQ

DETAIL IR

DETAIL IS

DETAIL IT

DETAIL IU

DETAIL IV

DETAIL IW

DETAIL IX

DETAIL IY

DETAIL IZ

DETAIL JA

DETAIL JB

DETAIL JC

DETAIL JD

DETAIL JE

DETAIL JF

DETAIL JG

DETAIL JH

DETAIL JI

DETAIL JJ

DETAIL JK

DETAIL JL

DETAIL JM

DETAIL JN

DETAIL JO

DETAIL JP

DETAIL JQ

DETAIL JR

DETAIL JS

DETAIL JT

DETAIL JU

DETAIL JV

DETAIL JW

DETAIL JX

DETAIL JY

DETAIL JZ

DETAIL KA

DETAIL KB

DETAIL KC

DETAIL KD

DETAIL KE

DETAIL KF

DETAIL KG

DETAIL KH

DETAIL KI

DETAIL KJ

DETAIL KK

DETAIL KL

DETAIL KM

DETAIL KN

DETAIL KO

DETAIL KP

DETAIL KQ

DETAIL KR

DETAIL KS

DETAIL KT

DETAIL KU

DETAIL KV

DETAIL KW

DETAIL KX

DETAIL KY

DETAIL KZ

DETAIL LA

PKG. CODES	EXP. PAD VARIATIONS					
	D2			E2		
	MIN.	MAX.	MAX.	MIN.	MAX.	MAX.
T1655-2	3.00	3.10	3.20	3.00	3.10	3.20
T1655-3	3.00	3.10	3.20	3.00	3.10	3.20
T1655N-1	3.00	3.10	3.20	3.00	3.10	3.20
T2055-3	3.00	3.10	3.20	3.00	3.10	3.20
T2055-4	3.00	3.10	3.20	3.00	3.10	3.20
T2055-5	3.15	3.25	3.35	3.15	3.25	3.35
T2855-3	3.15	3.25	3.35	3.15	3.25	3.35
T2855-4	2.60	2.70	2.80	2.60	2.70	2.80
T2855-5	2.60	2.70	2.80	2.60	2.70	2.80
T2855-6	3.15	3.25	3.35	3.15	3.25	3.35
T2855-7	2.60	2.70	2.80	2.60	2.70	2.80
T2855-8	3.15	3.25	3.35	3.15	3.25	3.35
T2855N-1	3.15	3.25	3.35	3.15	3.25	3.35
T3255-3	3.00	3.10	3.20	3.00	3.10	3.20
T3255-4	3.00	3.10	3.20	3.00	3.10	3.20
T3255-5	3.00	3.10	3.20	3.00	3.10	3.20
T4055-7	3.40	3.50	3.60	3.40	3.50	3.60
T4055-8	3.40	3.50	3.60	3.40	3.50	3.60
T4055-9	3.40	3.50	3.60	3.40	3.50	3.60

1. DIMENSIONING & TOLERANCING CONFORM TO ASME Y14.5M-1994.
2. ALL DIMENSIONS ARE IN MILLIMETERS, ANGLES ARE IN DEGREES.
3. N IS THE TOTAL NUMBER OF TERMINALS.
4. THE TERMINAL #1 IDENTIFIER AND TERMINAL NUMBERING CONVENTION SHALL CONFORM TO JEDEC 95-1 SPRING. THE NUMBER OF TERMINAL #1 IDENTIFIER IS OPTIONAL, BUT MUST BE LOCATED WITHIN THE ZONE INDICATED. THE TERMINAL #1 IDENTIFIER MAY BE EITHER A MOLD OR MARKED FEATURE.
5. DIMENSION b APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.25 mm AND 0.30 mm FROM TERMINAL TIP.
6. ND AND NE REFER TO THE NUMBER OF TERMINALS ON EACH D AND E SIDE RESPECTIVELY.
7. DEPOSITION IS POSSIBLE IN A SYMMETRICAL FASHION.
8. COPLANARITY APPLIES TO THE EXPOSED HEAT SINK SLAG AS WELL AS THE TERMINALS.
9. DRAWING CONFORMS TO JEDEC MO220, EXCEPT EXPOSED PAD DIMENSION FOR T2855-3 AND T2855-6.
10. WARPAGE SHALL NOT EXCEED 0.10 mm.
11. MARKING IS FOR PACKAGE ORIENTATION REFERENCE ONLY.
12. NUMBER OF LEADS SHOWN ARE FOR REFERENCE ONLY.
13. LEAD CENTERLINES TO BE AT TRUE POSITION AS DEFINED BY BASIC DIMENSION "e" ± 0.05 .


-DRAWING NOT TO SCALE-

 DALLAS SEMICONDUCTOR 		
TITLE: PACKAGE OUTLINE. 16, 20, 28, 32, 40L THIN QFN, 5x5x0,8mm		
APPROVAL	DOCUMENT CONTROL NO. 21-0140	REV. J 2/02

1000 Base-T, ±15kV ESD Protection LAN Switches

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

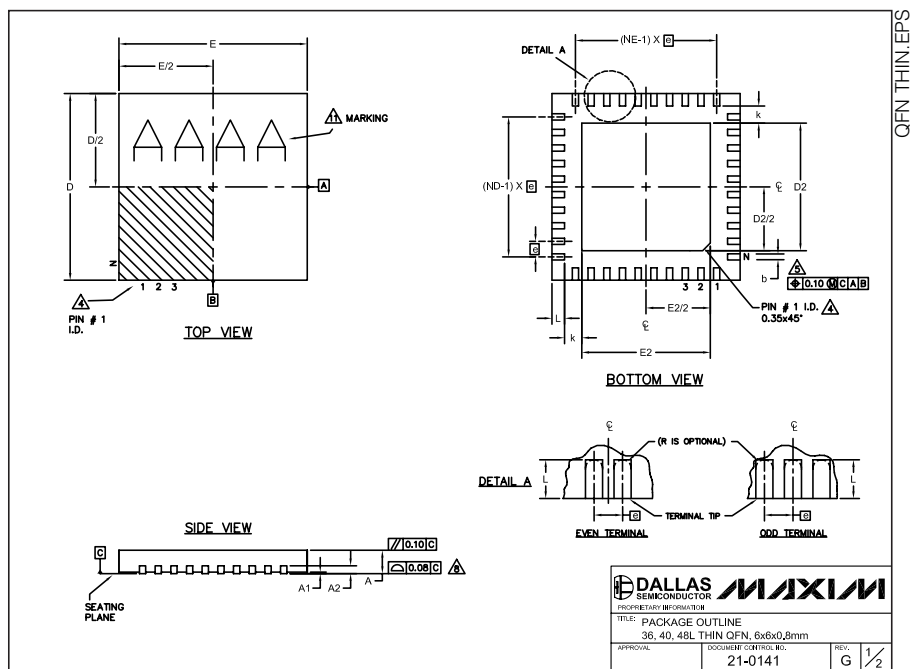

COMMON DIMENSIONS									
PKG.	36L 6x6			40L 6x6			48L 6x6		
SYMBOL	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.70	0.75	0.80	0.70	0.75	0.80	0.70	0.75	0.80
A1	0	0.02	0.05	0	0.02	0.05	0	—	0.05
A2	0.20 REF.			0.20 REF.			0.20 REF.		
b	0.20	0.25	0.30	0.20	0.25	0.30	0.15	0.20	0.25
D	5.90	6.00	6.10	5.90	6.00	6.10	5.90	6.00	6.10
E	5.90	6.00	6.10	5.90	6.00	6.10	5.90	6.00	6.10
e	0.50 BSC.			0.50 BSC.			0.40 BSC.		
k	0.25	—	—	0.25	—	—	0.25	—	—
L	0.45	0.55	0.65	0.30	0.40	0.50	0.30	0.40	0.50
N	36			40			48		
ND	9			10			12		
NE	9			10			12		
JEDEC	WJJD-1			WJJD-2			—		

EXPOSED PAD VARIATIONS					
PKG. CODES	D2			E2	
	MIN.	NOM.	MAX.	MIN.	MAX.
T3666-2	3.60	3.70	3.80	3.60	3.70
T3666-3	3.60	3.70	3.80	3.60	3.70
T3666N-1	3.60	3.70	3.80	3.60	3.70
T4066-2	4.00	4.10	4.20	4.00	4.10
T4066-3	4.00	4.10	4.20	4.00	4.10
T4066-4	4.00	4.10	4.20	4.00	4.10
T4066-5	4.00	4.10	4.20	4.00	4.10
T4866-1	4.40	4.50	4.60	4.40	4.50
T4866-2	4.40	4.50	4.60	4.40	4.50

NOTES:

- DIMENSIONING & TOLERANCING CONFORM TO ASME Y14.5M-1994.
- ALL DIMENSIONS ARE IN MILLIMETERS, ANGLES ARE IN DEGREES.
- N IS THE TOTAL NUMBER OF TERMINALS.
- THE TERMINAL #1 IDENTIFIER AND TERMINAL NUMBERING CONVENTION SHALL CONFORM TO JESD 95-1 SPP-012. DETAILS OF TERMINAL #1 IDENTIFIER ARE OPTIONAL, BUT MUST BE LOCATED WITHIN THE ZONE INDICATED. THE TERMINAL #1 IDENTIFIER MAY BE EITHER A MOLD OR MARKED FEATURE.
- DIMENSION b APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.25 mm AND 0.30 mm FROM TERMINAL TIP.
- ND AND NE REFER TO THE NUMBER OF TERMINALS ON EACH D AND E SIDE RESPECTIVELY.
- DEPOPULATION IS POSSIBLE IN A SYMMETRICAL FASHION.
- COPLANARITY APPLIES TO THE EXPOSED HEAT SINK SLUG AS WELL AS THE TERMINALS.
- DRAWING CONFORMS TO JEDEC MO220, EXCEPT FOR 0.4mm LEAD PITCH PACKAGE T4866-1.
- WARPAGE SHALL NOT EXCEED 0.10 mm.
- MARKING IS FOR PACKAGE ORIENTATION REFERENCE ONLY.
- NUMBER OF LEADS SHOWN FOR REFERENCE ONLY.

MAXIM

DALLAS SEMICONDUCTOR

PROPRIETARY INFORMATION

TITLE: PACKAGE OUTLINE

36, 40, 48L THIN QFN, 6x6x0.8mm

APPROVAL: 21-0141

REV: G 2/2

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 13