

Features




- Low V_F (Max. 0.5V @ 30mA)
- Low I_R (Max. 1 μA @ 30V)
- High reliability

Ordering Information

Type No.	Marking	Package Code
SDB310WMUF	DB3	SOT-323F

Outline Dimensions

unit : mm

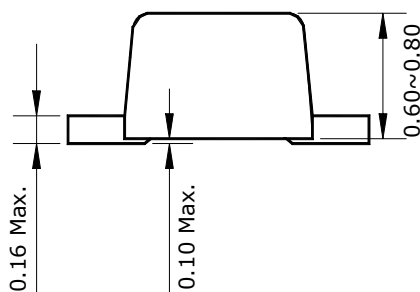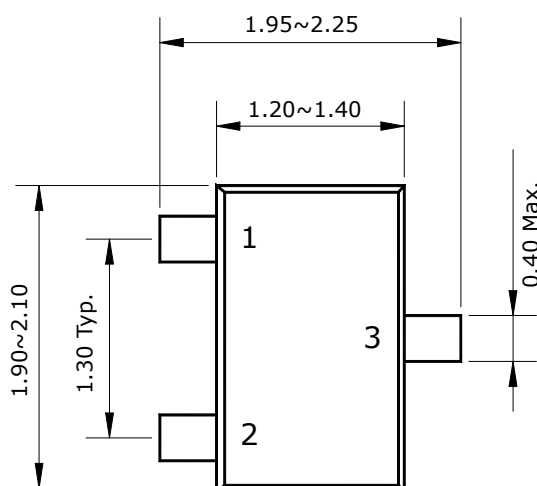

PIN Connections

1. Anode
2. Cathode
3. Cathode, Anode

Absolute maximum ratings**Ta=25°C**




Characteristic	Symbol	Rating	Unit
Reverse voltage	V_R	30	V
Forward current	I_F	200	mA
Non-repetitive peak forward current	$I_{FSM} *$	2	A
Power dissipation	P_D	150	mW
Junction temperature	T_j	150	°C
Storage temperature range	T_{stg}	-55 ~ 150	°C

* 60Hz , 1 cycle.

Electrical Characteristics**Ta=25°C**

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Forward voltage	V_{F1}	$I_F=10mA$	-	-	0.4	V
	V_{F2}	$I_F=30mA$	-	-	0.5	V
Reverse current	I_R	$V_R=30V$	-	-	1	μA
Total capacitance	C_T	$V_R=1V, f=1MHz$	-	10	-	pF

Electrical Characteristic Curves

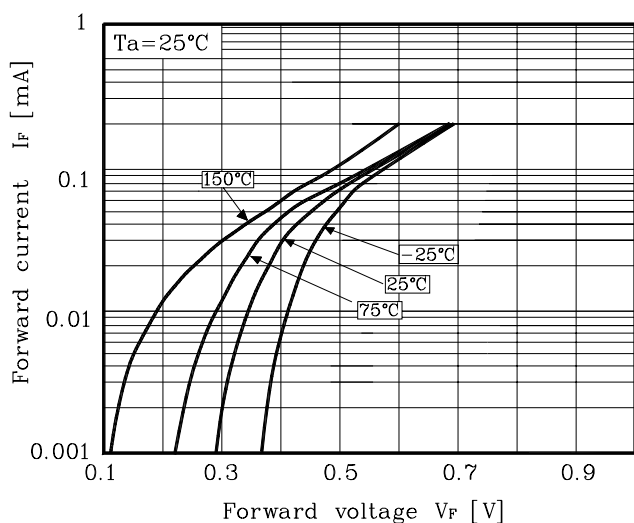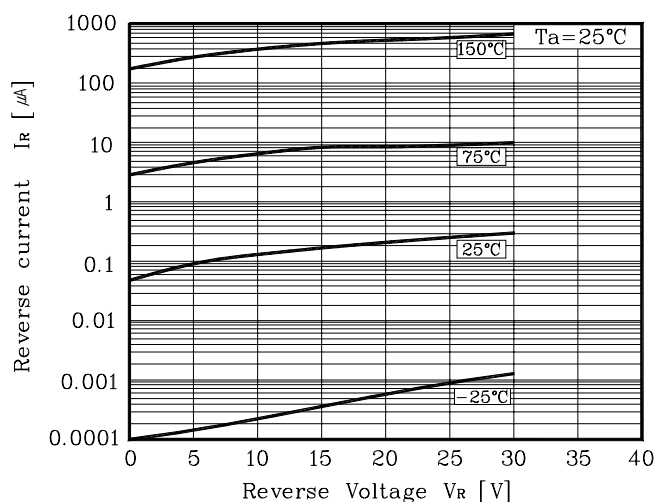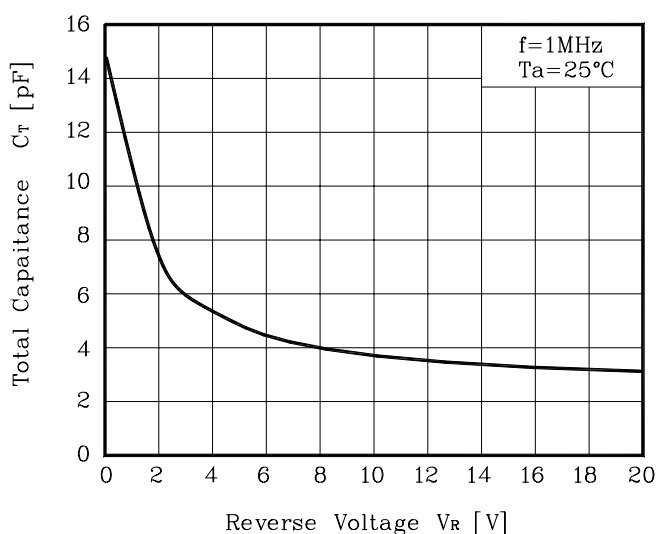Fig. 1 I_F - V_F Fig. 2 I_R - V_R Fig. 3 C_T - V_R 

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life (atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.