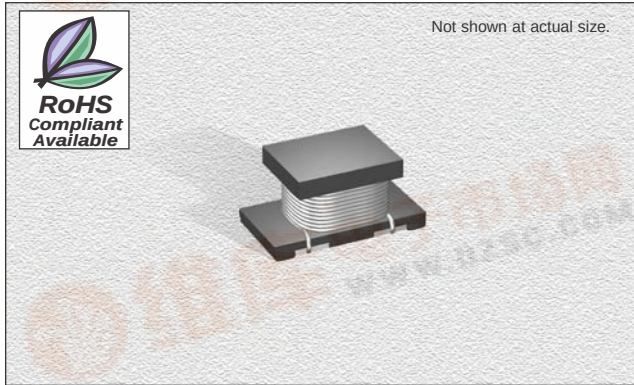


查询"CTLQ1206CF-R22M"供应商

CTLQ1206C Series

From 0.12 μH to 100 μH 

CHARACTERISTICS

Description: SMD power inductor**Applications:** Power supplies for VTR, OA equipment, LCD televisions, PC notebooks, portable communication equipment, DC/DC converters, etc.**Operating Temperature:** -25°C to +85°C**Inductance Tolerance:** J = $\pm 5\%$, K = $\pm 10\%$ & M = $\pm 20\%$ **Packaging:** Tape & Reel**Testing:** Tested on a HP4285A @ specified frequency**Allowable Current:** Self temperature rise shall be limited to 35°C max. Inductance drop 10% typ. at this rated current.**Miscellaneous:** RoHS Compliant available.**Additional Information:** Additional electrical & physical information available upon request**Samples available.** See website for ordering information.

SPECIFICATIONS

Please specify tolerance code when ordering.
 CTLQ1206C-4R7_ $\leftarrow$ J = $\pm 5\%$, K = $\pm 10\%$, M = $\pm 20\%$
 * K or M only

CTLQ1206CE Please specify "F" for RoHS compliant

Part Number	Inductance (μH)	L Test Freq. (MHz)	SRF Min. (MHz)	DCR Max. (Ω)	Allowable Current (mA)
CTLQ1206C_-R12M	0.12	1.0	250	0.112	970
CTLQ1206C_-R22M	0.22	1.0	250	0.140	850
CTLQ1206C_-R47M	0.47	1.0	180	0.210	700
CTLQ1206C_-1R0M	1.0	1.0	100	0.364	510
CTLQ1206C_-2R2M	2.2	1.0	50	0.533	430
CTLQ1206C_-4R7_*	4.7	1.0	31	0.845	340
CTLQ1206C_-100_	10	1.0	20	1.69	230
CTLQ1206C_-220_	22	1.0	14	3.90	160
CTLQ1206C_-470_	47	1.0	10	10.4	100
CTLQ1206C_-101_	100	1.0	7	15.6	80

PHYSICAL DIMENSIONS

Size	A	B	C	D Min.
mm	3.20 $\pm$ 0.30	1.80 $\pm$ 0.30	1.60 $\pm$ 0.30	0.7
inches	0.126 $\pm$ 0.012	0.071 $\pm$ 0.012	0.063 $\pm$ 0.012	0.028

