


Features

- 30% smaller size of HCE series.
- High insulation (Line to Ground) by resin case


Applications

- Electric Appliances and Inverters

Circuit

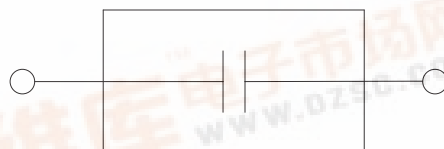

Dimensions

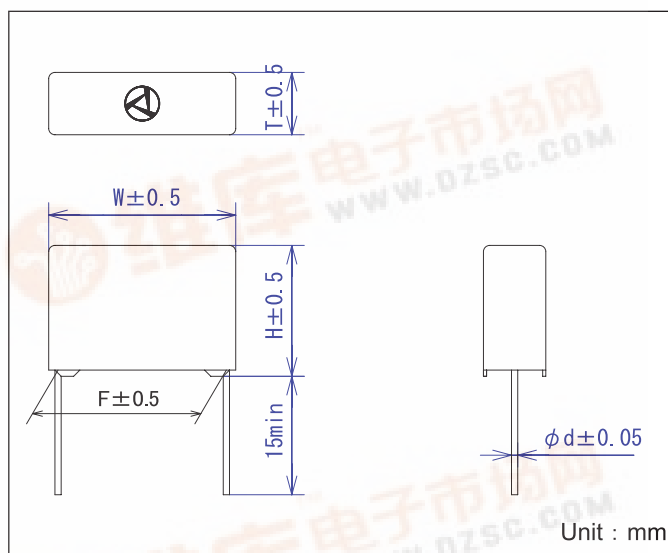

Rated Voltage		4 5 0 V										6 3 0 V					Dissipation factor	Test voltage	Insulation resistance
Capacitance		W	T	H	F	d	W	T	H	F	d								
PART NO.	μ F	12.0	6.5	11.5	10.0	0.6	17.0	6.0	12.0	15.0	0.6	C≤1.0 μ F 0.001max	Rated Voltage × 1.75 (2~5sec)	C>0.33 μ F 20000 Ω · Fmin (at 20°C 100Vdc)					
104	0.1	14.0	7.0	11.5	12.5	''	''	8.0	15.0	''	''								
154	0.15	''	8.5	13.5	''	''	''	9.0	16.0	''	''								
224	0.22	''	10.0	15.5	''	''	25.5	8.0	17.5	22.5	0.8								
334	0.33	17.0	11.5	16.5	15.0	''	''	9.5	19.0	''	''	C>1.0 μ F 0.002max							
474	0.47	22.5	10.0	17.0	20.0	''	30.5	10.5	21.0	27.5	''								
684	0.68	''	12.0	20.5	''	''	''	12.5	23.0	''	''								
105	1.0	26.0	13.5	22.0	22.5	0.8	''	17.0	27.5	''	''								
155	1.5	''	17.0	25.0	''	''	''	20.5	30.5	''	''	(at 1000 ±100Hz)							
225	2.2	''	17.0	25.0	''	''	''	20.5	30.5	''	''								

Model Numbering System

Operating Temperature: -55 ~ +100°C

