

Product Features

- +35 dBm IIP3
- RF: 1700 – 2000 MHz
- LO: 1450 – 1950 MHz
- IF: 50 – 250 MHz
- +17 dBm Drive Level
- Lead-free/green/RoHS-compliant SOIC-8 SMT package
- No External Bias Required

Applications

- 2.5G and 3G GSM/CDMA/wCDMA
- Optimized for DCS/PCS-band Mobile Infrastructure


Product Description

The MH1A is a passive GaAs MESFET mixer that provides high dynamic range performance in a low-cost lead-free/green/RoHS-compliant SOIC-8 package. WJ's MH1A uses patented techniques to realize +35 dBm Input IP3 at an LO drive level of +17 dBm and can be used for upconverting or downconverting low-side LO applications.

This single monolithic integrated circuit does not require any external baluns, bias, matching, or decoupling elements. The on-chip diplexer affords good matching on the RF and IF ports.

Typical applications include frequency up/down conversion, modulation and demodulation for receivers and transmitters used in 2.5G and 3G GSM/CDMA /wCDMA systems in the DCS, PCS, or UMTS frequency bands.

Functional Diagram



Function	Pin No.
LO	2
IF	5
RF	7
GND	1, 3, 4, 6, 8

Specifications⁽¹⁾

Parameters	Units	Min	Typ	Max	Comments
RF Frequency Range	MHz		1700 – 2000		
LO Frequency Range	MHz		1450 – 1950		
IF Frequency Range	MHz		50 – 250		
SSB Conversion Loss	dB		8.3	8.7	
Noise Figure	dB		8.5	9.2	See note 2
Input IP3	dBm	+30	+35		RF=1850-1910MHz, IF=235-245MHz, See note 3
Input IP3	dBm	+28	+35		All other RF/IF combinations, See note 3
Input P1dB	dBm		+20		
LO – RF Isolation	dB	25	30		LO = 1450 – 1950 MHz
LO – RF Isolation	dB		23		LO = 2256 – 2321 MHz
LO – IF Isolation	dB	27	38		
RF – IF Isolation	dB	12	20		
2LO – RF Isolation	dB		33		
Return Loss: RF Port	dB	10	14		Referenced to the nominal LO drive level of 17 dBm
Return Loss: IF Port	dB	10	20		Return loss phase is nominally at -90° at 1.9 GHz.
Return Loss: LO Port	dB	8	13		
LO Drive Level	dBm		+17		

1. Test conditions unless otherwise noted: RF / IF = 1700 / 250, 2000 / 50, and 2000 / 250 MHz with a low-side LO at +17 dBm in a downconverting application at 25 °C.

2. Assumes LO injection noise is filtered at the thermal noise floor, -174 dBm/Hz, at the RF, IF, and Image frequencies.

3. IIP3 is measured with $\Delta f = 1$ MHz with $RF_{in} = 5$ dBm / tone.

Absolute Maximum Rating

Parameter	Rating
Operating Case Temperature	-40 to +85 °C
Storage Temperature	-65 to +100 °C
LO Power	+21 dBm
Input IF / RF Power	+20 dBm

Operation of this device above any of these parameters may cause permanent damage.

Ordering Information

Part No.	Description
MH1A-G	High Dynamic Range PCS-band MMIC Mixer (lead-free/green/RoHS-compliant SOIC-8 package)
MH1A-PCB	Fully-Assembled Mixer Application Board

Specifications and information are subject to change without notice



MH1A


“MH1A-C”供应商

High Dynamic Range PCS-Band MMIC Mixer

The Communications Edge™

Product Information


Typical Performance Plots: Low-side Downconversion

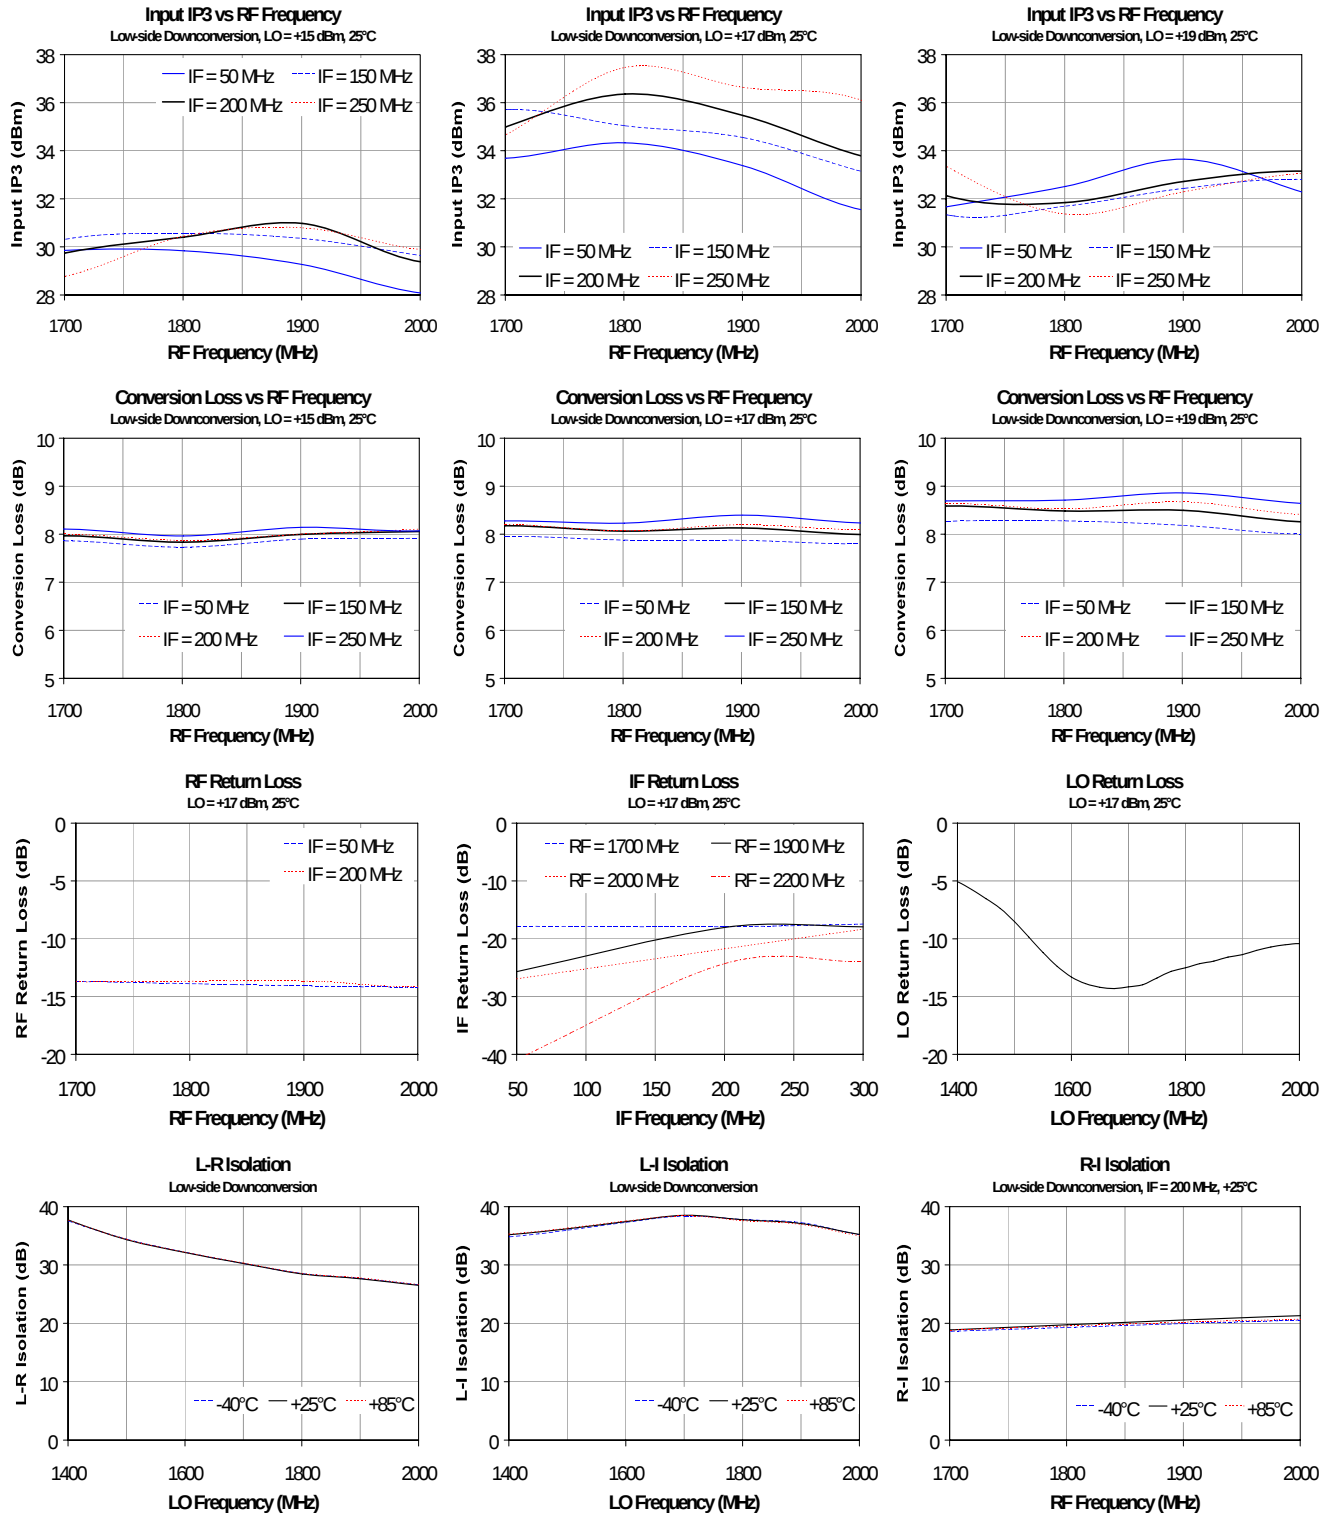

Specifications and information are subject to change without notice



Typical Performance Plots: Low-side Downconversion (cont'd)

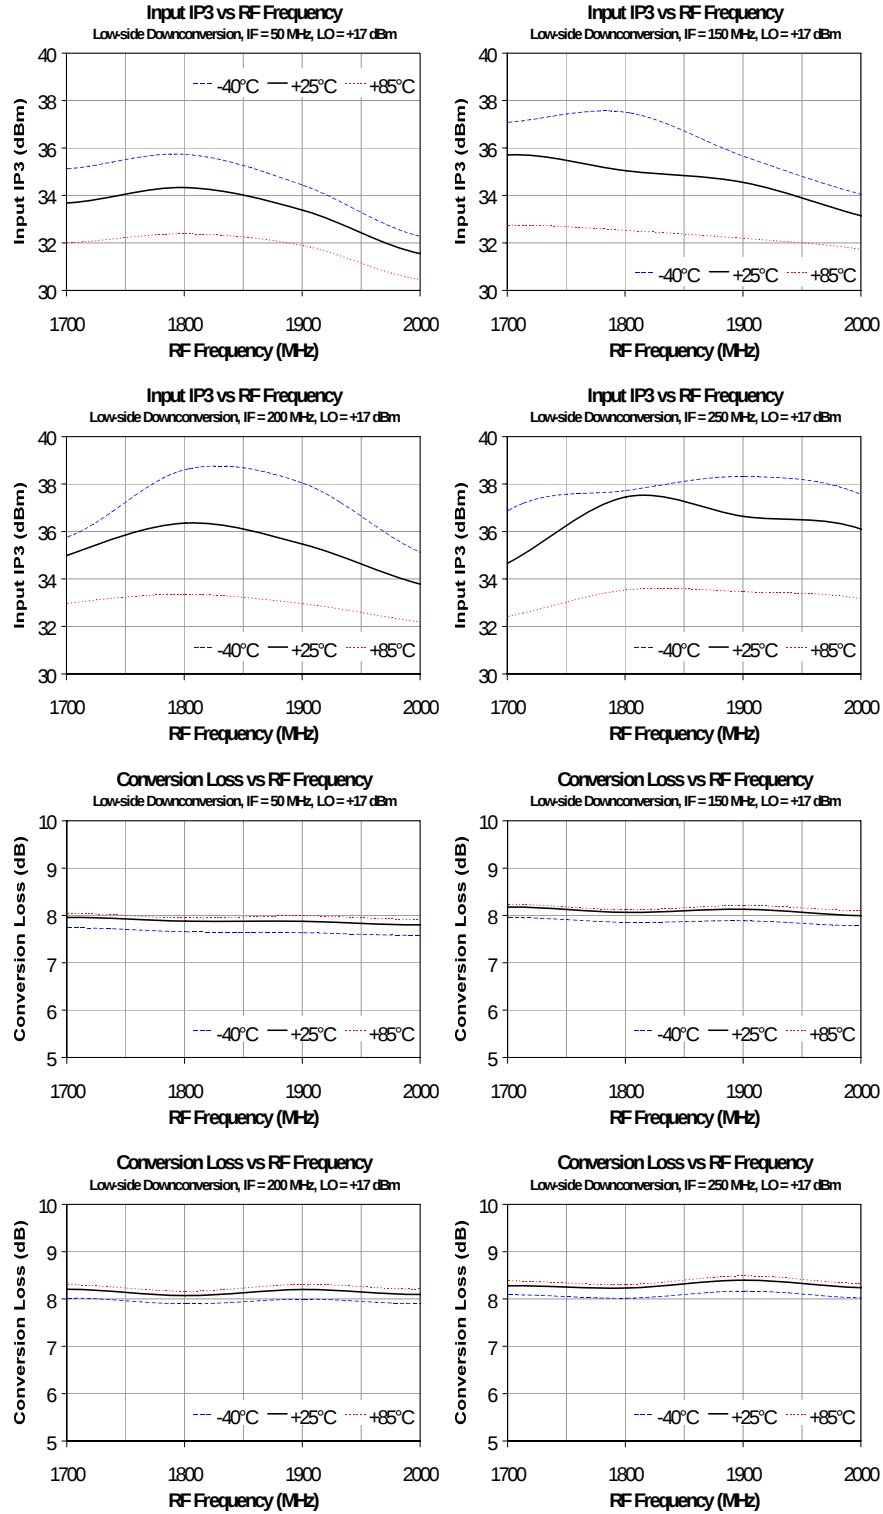



MH1A


全球“MH1A-G”供应商

High Dynamic Range PCS-Band MMIC Mixer

The Communications Edge™

Product Information

Typical Performance Plots: High-side Upconversion

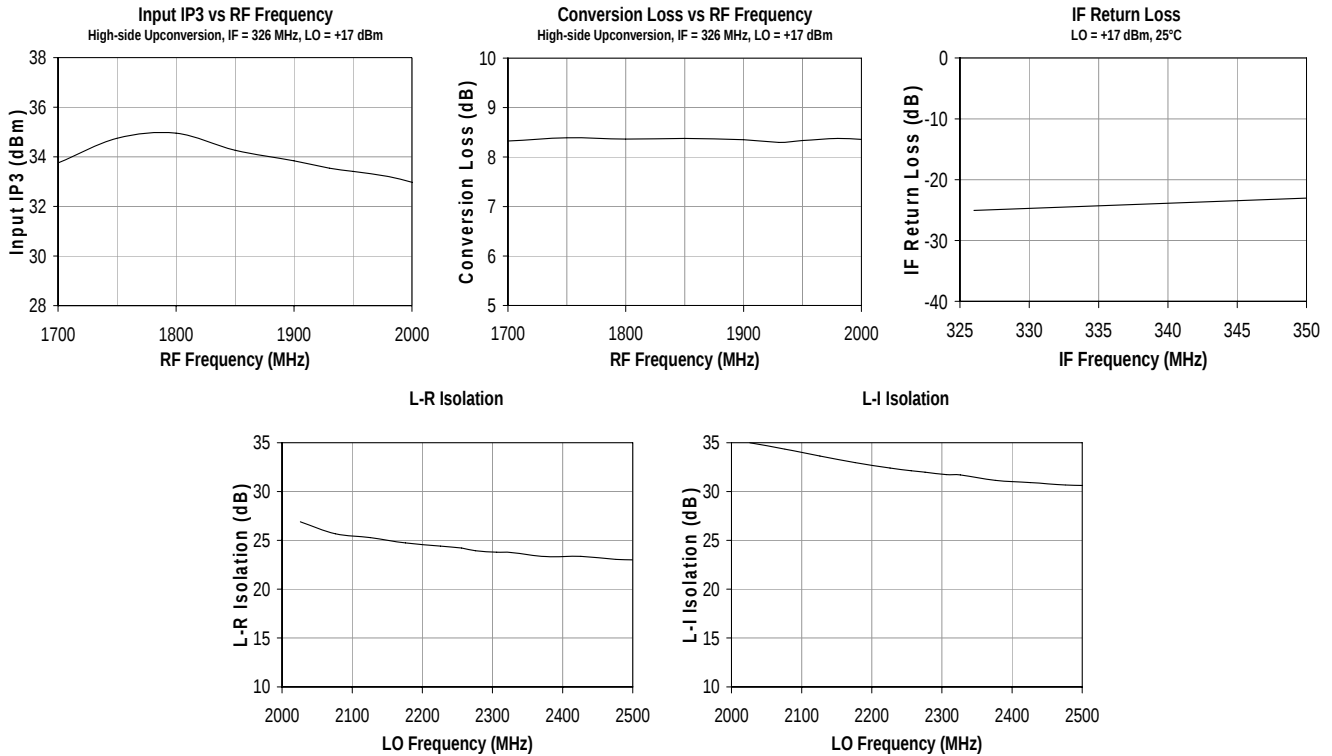



MH1A

“MH1A-G”供应商

High Dynamic Range PCS-Band MMIC Mixer


The Communications Edge™

Product Information

MH1A-G Mechanical Information

This package is lead-free/green/RoHS-compliant. The plating material on the leads is NiPdAu. It is compatible with both lead-free (maximum 260 °C reflow temperature) and tin-lead (maximum 245 °C reflow temperature) soldering processes.


Application Circuit (MH1A-PCB)



Notes:

1. All other pins on mixer are grounded.
2. Circuit board material: .014" FR-4, 4 layers, .062" total thickness
3. Blocking capacitors are required on the ports (pins 2, 5, 7) if any dc signal is present.

Outline Drawing

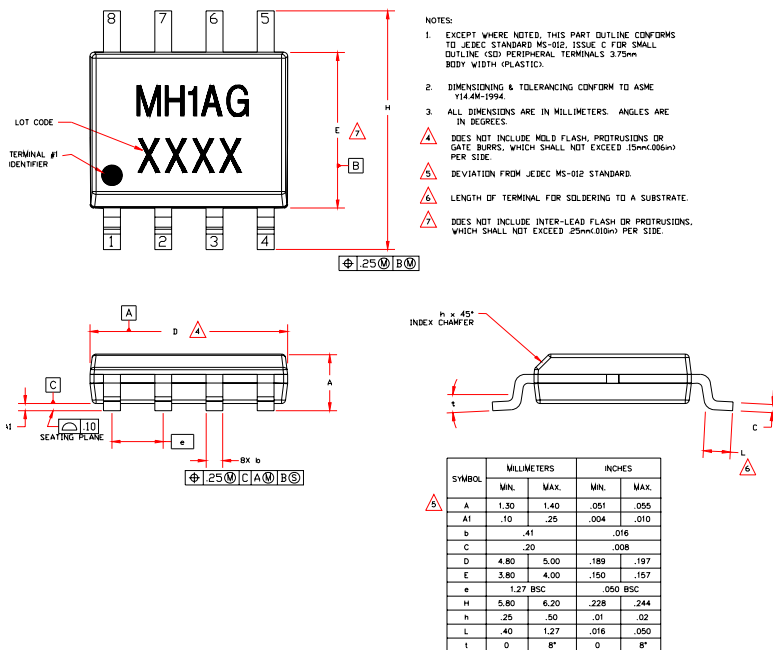

Product Marking

The component will be marked with an “MH1AG” designator followed by an alphanumeric lot code on the top surface of the package. The obsolete tin-lead package is marked with an “MH1A” designator followed by an alphanumeric lot code.

Tape and reel specifications for this part are located on the website in the “Application Notes” section.

ESD / MSL Information




Caution! ESD sensitive device.

ESD Classification: Class 1B
 Value: Passes $\geq 500V$ to $<1000V$
 Test: Human Body Model (HBM)
 Standard: JEDEC Standard JESD22-A114

ESD Classification: Class III
 Value: Passes $\geq 500V$ to $<1000V$
 Test: Charged Device Model (CDM)
 Standard: JEDEC Standard JESD22-C101

MSL Rating: Level 2 at $+260^{\circ}C$ convection reflow
 Standard: JEDEC Standard J-STD-020B

Land Pattern / Mounting Configuration

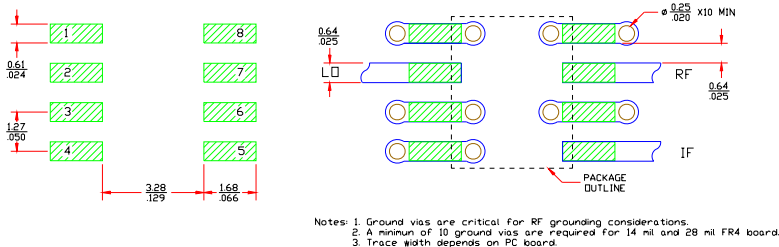

Functional Pin Layout

Pin	Function
1	Ground
2	LO Port
3	Ground
4	Ground
5	IF Port
6	Ground
7	RF Port
8	Ground

Specifications and information are subject to change without notice