




SPECIFICATION FOR APPROVAL

REF: [查询"RC1008681KL"供应商](#)

PAGE: 1


PROD. NAME	RADIAL INDUCTOR	ABC'S DWG NO.	RC1008□□□□L□-□□□
		ABC'S ITEM NO.	

. MECHANICAL DIMENSION :




A	:	10.0±0.5	m/m
B	:	8.0±0.5	m/m
C	:	18.0±3.0	m/m
F	:	6.4 typ.	m/m
Wψ	:	0.8±0.05	m/m

. SCHEMATIC DIAGRAM :



. MATERIALS :

- a . Core : Ferrite DR core
- b . Wire : Enamelled copper wire (Class F)
- c . Lead : Sn/Ag/Cu
- d . Coating : Varnish
- e . Remark : Products comply with RoHS' requirements



. ELECTRICAL CHARACTERISTICS :

- a . Temp. rise : 30 typ. at rated current.
- b . Storage temp. : -25 ---- +85
- c . Operating temp. : -20 ---- +80

AR-001A

ABC 千如電子集團
ABC ELECTRONICS GROUP.



SPECIFICATION FOR APPROVAL

查询"RC1008681KL"供应商

REF :


PAGE: 2

PROD. NAME	RADIAL INDUCTOR	ABC'S DWG NO.	RC1008□□□□L□-□□□
		ABC'S ITEM NO.	

. ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (μH)	Test Freq. L	SRF (MHz) typ.	RDC (Ω)		Irms (A) typ.	Isat (A) typ.
				max.	typ.		
RC1008100ML□-□□□	10 ±20%	1V/1KHz	22.00	0.026	0.019	4.50	4.70
RC1008150ML□-□□□	15 ±20%	1V/1KHz	16.50	0.035	0.026	3.80	4.00
RC1008220ML□-□□□	22 ±20%	1V/1KHz	14.00	0.050	0.034	3.00	3.30
RC1008330ML□-□□□	33 ±20%	1V/1KHz	10.00	0.070	0.050	2.50	2.70
RC1008470KL□-□□□	47 ±10%	1V/1KHz	9.20	0.098	0.077	2.20	2.40
RC1008680KL□-□□□	68 ±10%	1V/1KHz	7.00	0.145	0.112	1.80	2.00
RC1008101KL□-□□□	100 ±10%	1V/1KHz	6.00	0.210	0.165	1.40	1.60
RC1008151KL□-□□□	150 ±10%	1V/1KHz	4.90	0.300	0.238	1.20	1.40
RC1008221KL□-□□□	220 ±10%	1V/1KHz	3.80	0.420	0.335	1.00	1.10
RC1008331KL□-□□□	330 ±10%	1V/1KHz	3.30	0.660	0.530	0.80	0.92
RC1008471KL□-□□□	470 ±10%	1V/1KHz	2.70	0.860	0.685	0.72	0.80
RC1008681KL□-□□□	680 ±10%	1V/1KHz	2.20	1.280	1.020	0.56	0.63
RC1008102KL□-□□□	1000 ±10%	1V/1KHz	1.65	1.850	1.510	0.46	0.54

- 1). □ : Packaging information... [A] : Bulk
2). "-□□□ " : Reference code
3). I rms base on temp. rise 30 typ.
4). Isat base on L/L0A=10% typ.

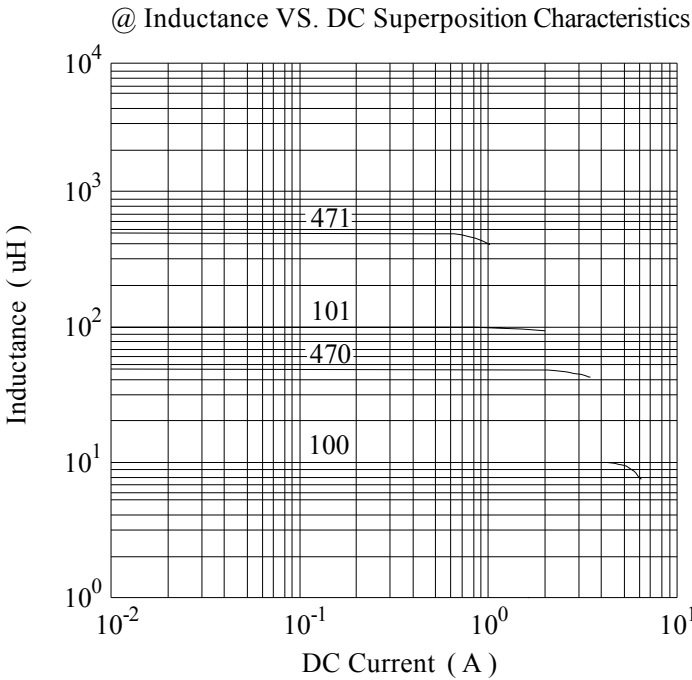


SPECIFICATION FOR APPROVAL

REF: [查询"RC1008681KL"供应商](#)

PAGE: 3

PROD. NAME	RADIAL INDUCTOR	ABC'S DWG NO.	RC1008□□□□L□-□□□
		ABC'S ITEM NO.	

. DWGING NUMBER EXPRESSION :

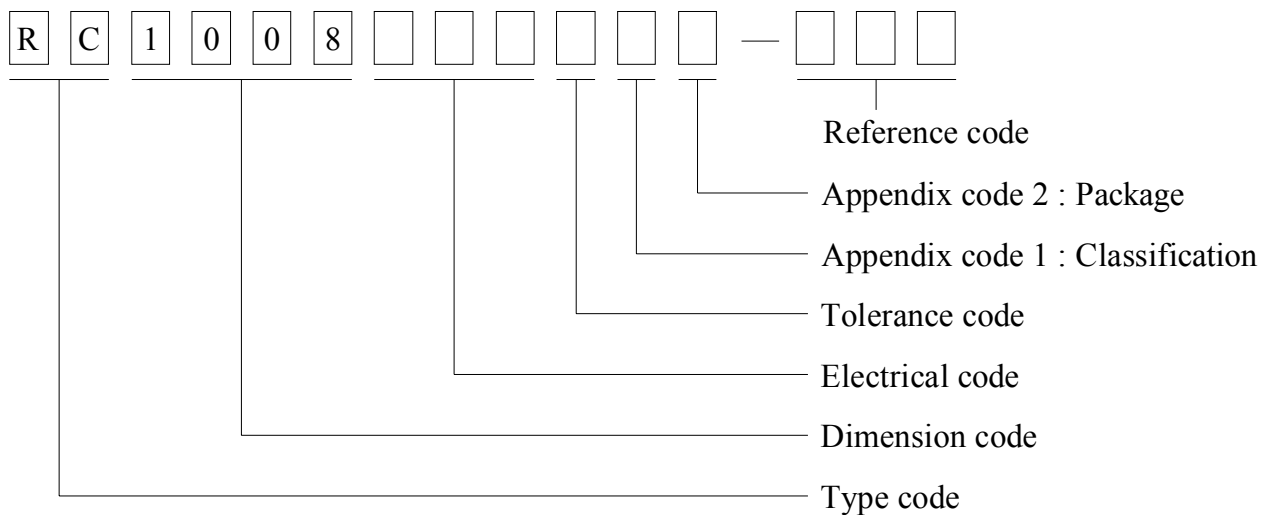

Appendix code 1 : Product Classification

L : Lead Free Standard products comply with RoHS' requirements

1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	Box	130 pcs	

SPECIFICATION FOR APPROVAL

查詢"RC1008681KL"供應商

PAGE: 4

PROD. NAME	RADIAL INDUCTOR	ABC'S DWG NO.	RC1008□□□□L□-□□□
		ABC'S ITEM NO.	

. UL CARD :

OBMW2

September 8, 2000

Magnet Wire-Component

JUNG SHING WIRE CO LTD

E174837

231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN

HSIEN TAIWAN

Mtl Dsg	Mark Dsg	Coat Typ	ANSI Type	Temp Class	
		BC			
AIW	—	Polyamideimide	—	220	
CFUEWB	—	Polyurethane	—	220	
EIAIW	—	Polyesterimide	Polyamideimide	MW75C	130
EILOCKY	—	Polyesterimide	Polyamide	MW35C	200
EILOCKW	—	Polyesterimide	Modified Epoxy	—	180
EIW	—	Polyesterimide	—	—	200
EIW-2	—	Polyesterimide	—	MW74-C	155
FL.EILOCKY	—	Modified Polyester	Polyamide	—	155
LSFFW	—	Polyurethane	—	MW79-C	155
LSUEW	—	Polyurethane	—	—	130
PEW	—	Polyester	—	—	155
PEY	—	Polyester	Nylon	MW24-C	155
SF.FLW	—	Modified Polyester	—	MW26C	155
SF.EIW	—	Polyesterimide	—	MW77C	180
SF.BY@	—	Modified Polyester	Nylon	MW27-C	155
SF.FLY@	—	Modified Polyester	Nylon	MW27-C	155
SF.BLOCKBS	—	Modified Polyester	Modified Polyamide	—	155
SF.EILOCKY#	—	Polyesterimide	Polyamide	—	180
SF.EILOCKBS	—	Polyesterimide	Modified Polyamide	—	180
SF.BW@	—	Modified Polyester	—	MW26C	155
SFFW	—	Polyurethane	—	MW79	155

287806002

Page 1 of 2

A not-for-profit organization
dedicated to public safety and
committed to quality service

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	—	Polyurethane		Polyamide	MW80C	155
UEW-1	—	Polyurethane		—	MW2-C	105
UEW-2	—	Polyurethane		—	—	130
UEW-4	—	Polyurethane		—	MW75C	130
UEY	—	Polyurethane		Nylon	MW28-C	130
UEY-2	—	Polyurethane		Polyamide	MW28-C	130

@-May be suffixed by LZ; # - May be suffixed by LZ, EL or LZL

LZ - Signifies magnd wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signi-
fies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks **JSW** or 榮星電線, material designation or marked designation on packaed or reel, and
Recognized Component Mark.

See General Information Preceding These Recognitions

For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002

Page 2 of 2

OBMW2E174837
September 8, 2000

AR-001A



千如電子集團
ABC ELECTRONICS GROUP.

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn