
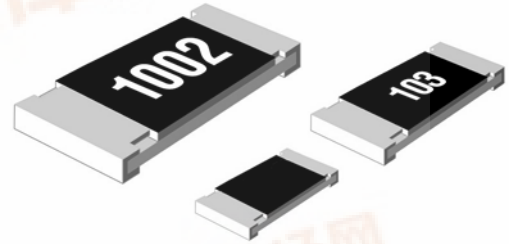


CRS/CJS Series SMD Resistors

Custom solutions are available.


HOW TO ORDER

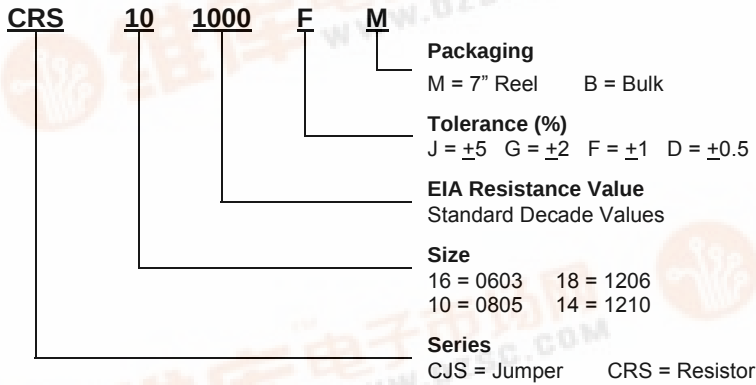

FEATURES

- Gold (Au) Terminations prevents sulfuration in a sulfur containing environment
- Ideal solder attachment and improved conductivity
- High Stability Thick Film Resistor
- Operating temperature -55°C ~ +125°C
- Tolerances as tight as $\pm 0.5\%$
- TCR to $\pm 200\text{ppm}$

SCHEMATIC




DIMENSIONS (mm)

Size	L	W	t	c	d
0402	1.00 $\pm$ 0.005	0.50 $\pm$ 0.05	0.35 $\pm$ 0.05	0.20 $\pm$ 0.10	0.25 $\pm$ 0.05, 0.10
0603	1.60 $\pm$ 0.15	0.80 $\pm$ 0.15	0.45 $\pm$ 0.10	0.30 $\pm$ 0.20	0.30 $\pm$ 0.20
0805	2.00 $\pm$ 0.20	1.25 $\pm$ 0.10	0.50 $\pm$ 0.10	0.40 $\pm$ 0.20	0.40 $\pm$ 0.20
1206	3.20 $^{+0.015-0.20}$	1.60 $^{+0.05-0.15}$	0.60 $\pm$ 0.10	0.50 $\pm$ 0.25	0.50 $\pm$ 0.30
1210	3.20 $\pm$ 0.10	2.50 $^{-0.20-0.10}$	0.60 $\pm$ 0.10	0.50 $\pm$ 0.20	0.50 $\pm$ 0.20
2010	5.00 $\pm$ 0.20	2.50 $\pm$ 0.15	0.60 $\pm$ 0.10	0.60 $\pm$ 0.20	0.50 $\pm$ 0.30
2512	6.30 $\pm$ 0.20	3.20 $\pm$ 0.20	0.60 $\pm$ 0.10	0.70 $\pm$ 0.20	0.70 $\pm$ 0.20

CONSTRUCTION

Substrate		96% Alumina
Resistive Element		RuO ₂
Protective Coating		Boric/Silicate Acid Lead Glass
Terminal	Upper Inner Layer	Au
	Side/Bottom Layer	AgPd
	Middle Layer	Ni
	Outer Layer	Sn

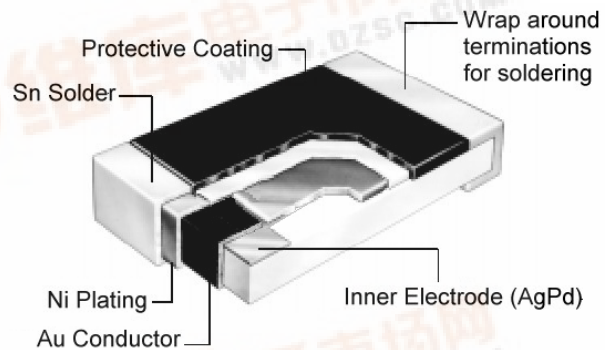

Size	0402	0603	0805	1206	1210	2010	2512
Power Rating (EIA 575)	0.063W	0.1W	0.10W	0.125W	0.25W	0.75W	1W
Max Working Voltage*	50V	50V	150V	200V	200V	200V	200V
Max Overload Voltage	100V	100V	300V	400V	400V	400V	400V
Tolerance (%)	$\pm 0.5, \pm 1, \pm 2, \pm 5$	$\pm 0.5, \pm 1, \pm 2, \pm 5$	$\pm 0.5, \pm 1, \pm 2, \pm 5$	$\pm 0.5, \pm 1, \pm 2, \pm 5$	$\pm 0.5, \pm 1, \pm 2, \pm 5$	$\pm 0.5, \pm 1, \pm 2, \pm 5$	$\pm 0.5, \pm 1, \pm 2, \pm 5$
EIA Values	E-96, E-24	E-96, E-24	E-96, E-24	E-96, E-24	E-96, E-24	E-96, E-24	E-96, E-24
Resistance	10 ~ 1 M Ω	10 ~ 1 M Ω	10 ~ 1 M Ω	10 ~ 1 M Ω	10 ~ 1 M Ω	10 ~ 1 M Ω	10 ~ 1 M Ω
TCR (ppm/°C)	± 200	± 200	± 200	± 200	± 200	± 200	± 200
Operating Temp.	-55°C ~ +125°C	-55°C ~ +125°C	-55°C ~ +125°C	-55°C ~ +125°C	-55°C ~ +125°C	-55°C ~ +125°C	-55°C ~ +125°C

* Rated Voltage: $\sqrt{P \times R}$

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn