

2SK3391

Silicon N-Channel MOS FET UHF Power Amplifier

REJ03G0209-0300

Rev.3.00

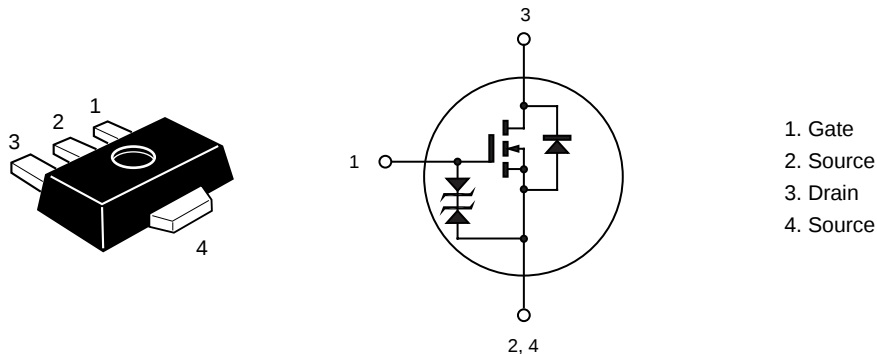
Nov 08, 2007

Features

- High power output, High gain, High efficiency
PG = 18 dB, Pout = 1.6 W, η_{add} = 58% min. (f = 836 MHz)
- Compact package capable of surface mounting

Outline

RENESAS Package code: PLZZ0004CA-A
(Package Name : UPAK®)



Note: Marking is "JX".

*UPAK is a trademark of Renesas Technology Corp.

Absolute Maximum Ratings

(Ta = 25°C)

Item	Symbol	Ratings	Unit
Drain to source voltage	V_{DSS}	17	V
Gate to source voltage	V_{GSS}	±10	V
Drain current	I_D	0.3	A
Drain peak current	$I_D(\text{pulse})$ ^{Note1}	0.75	A
Channel dissipation	Pch ^{Note2}	5	W
Channel temperature	Tch	150	°C
Storage temperature	Tstg	-45 to +150	°C

Notes: 1. PW < 1sec, Tch < 150°C

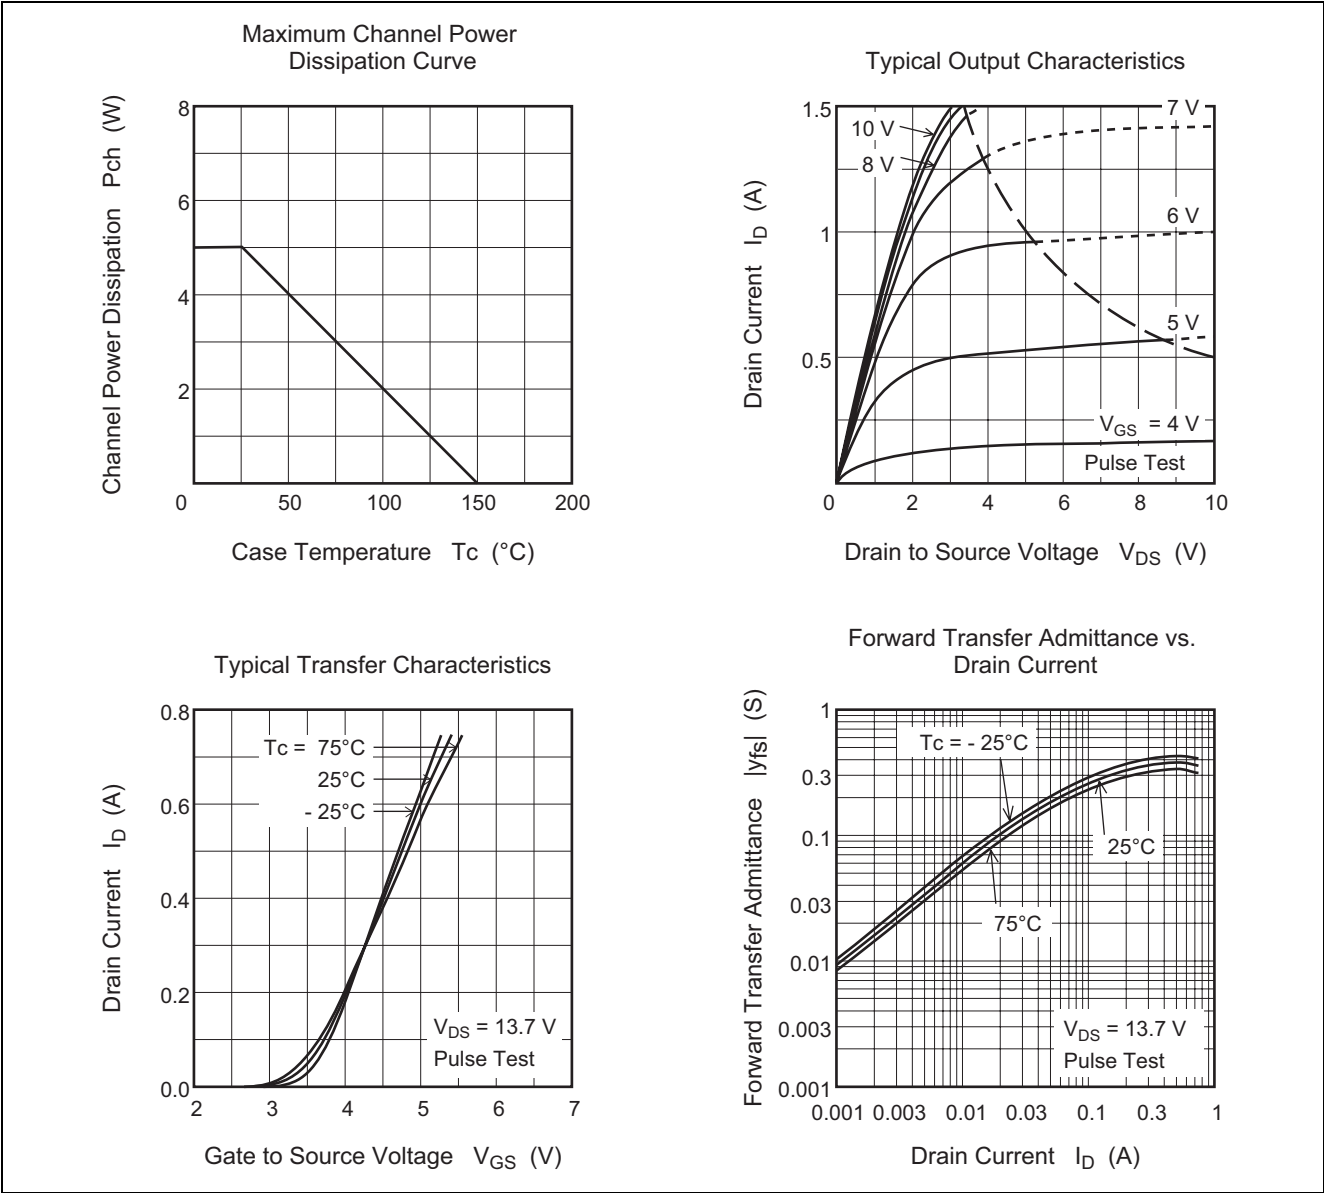
2. Value at Tc = 25°C

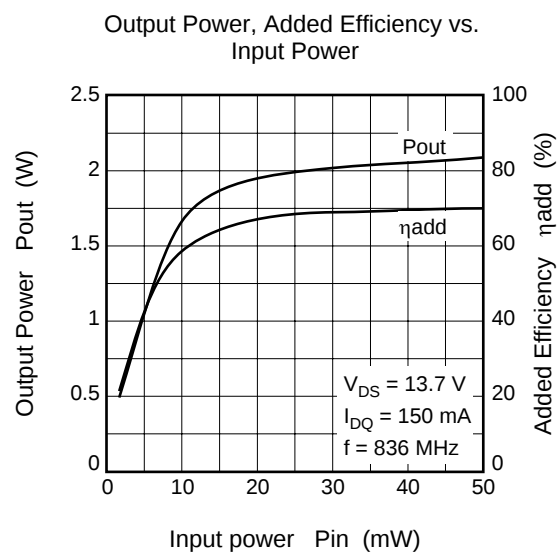
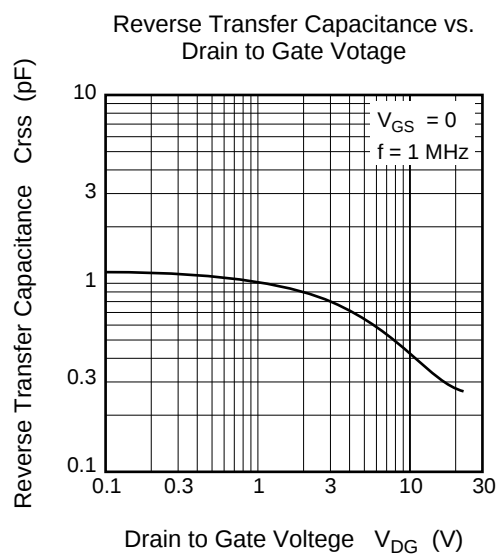
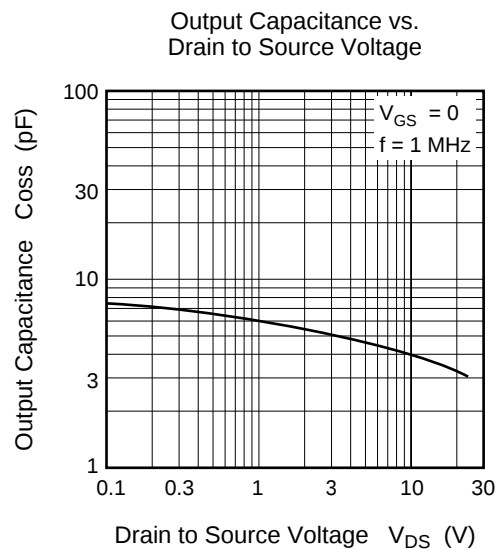
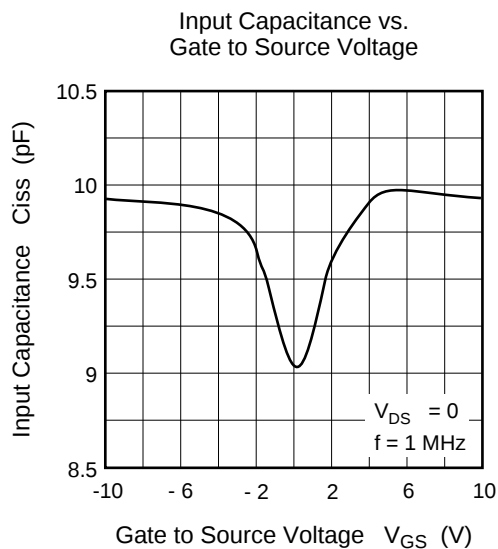
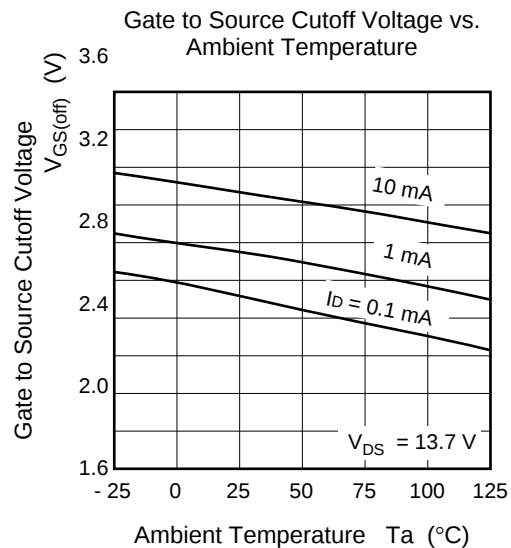
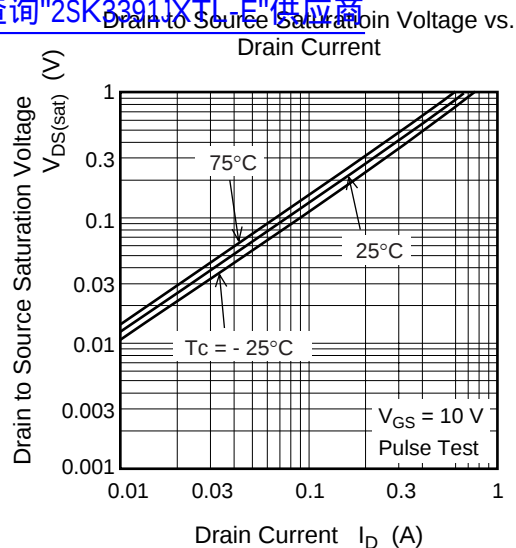
This device is sensitive to electro static discharge. An adequate careful handling procedure is requested.

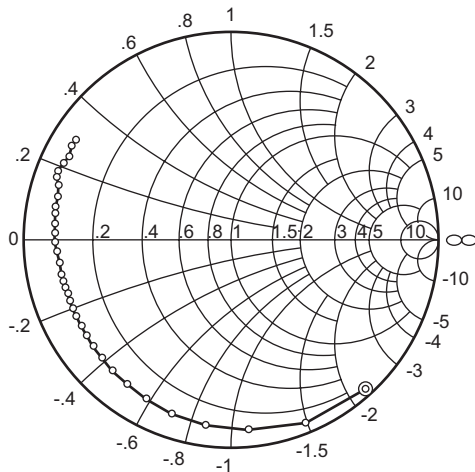
(Ta = 25°C)

Item	Symbol	Min.	Typ	Max.	Unit	Test Conditions
Zero gate voltage drain current	I_{DSS}	—	—	10	μA	$V_{DS} = 13.7 V, V_{GS} = 0$
Gate to source leak current	I_{GSS}	—	—	± 5	μA	$V_{GS} = \pm 10 V, V_{DS} = 0$
Gate to source cutoff voltage	$V_{GS(off)}$	2.3	—	3.1	V	$V_{DS} = 13.7 V, I_D = 1 mA$
Input capacitance	C_{iss}	—	10	—	pF	$V_{GS} = 5 V, V_{DS} = 0, f = 1 MHz$
Output capacitance	C_{oss}	—	3.5	—	pF	$V_{DS} = 13.7 V, V_{GS} = 0, f = 1 MHz$
Output Power	P_{out}	1.6	—	—	W	$V_{DS} = 13.7 V, I_{DQ} = 150 mA$
Added Efficiency	η_{add}	58	—	—	%	$f = 836 MHz, P_{in} = 25.1 mW$

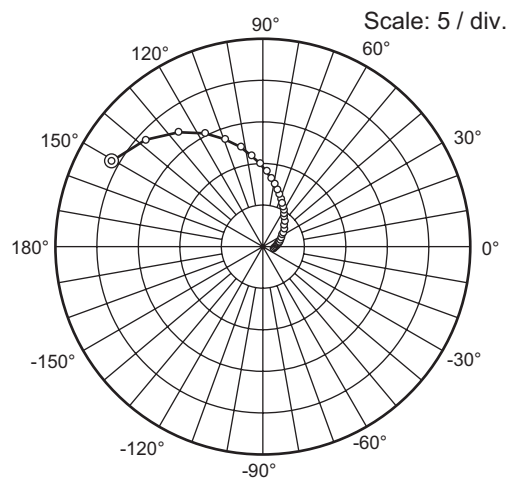
Main Characteristics



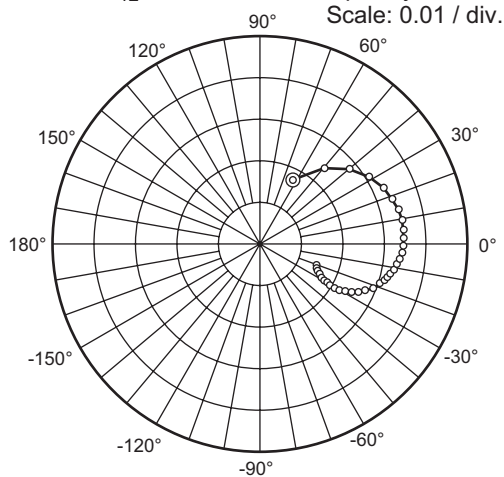
[查询"2SK3391XTL-E"供应商](#)


[查询"2SK3391JXTL-E"供应商](#)
S₁₁ Parameter vs. Frequency

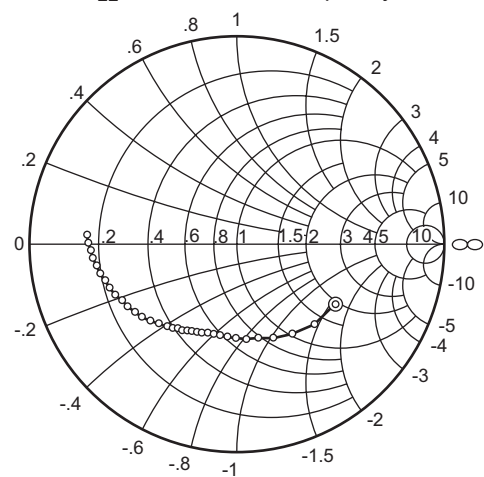
Condition: $V_{DS} = 13.7$ V, $I_{DQ} = 150$ mA, $Z_o = 50 \Omega$
 100 to 1000 MHz (50 MHz Step)
 1000 to 2500 MHz (100 MHz Step)

S₂₁ Parameter vs. Frequency

Condition: $V_{DS} = 13.7$ V, $I_{DQ} = 150$ mA, $Z_o = 50 \Omega$
 100 to 1000 MHz (50 MHz Step)
 1000 to 2500 MHz (100 MHz Step)

S₁₂ Parameter vs. Frequency

Condition: $V_{DS} = 13.7$ V, $I_{DQ} = 150$ mA, $Z_o = 50 \Omega$
 100 to 1000 MHz (50 MHz Step)
 1000 to 2500 MHz (100 MHz Step)

S₂₂ Parameter vs. Frequency

Condition: $V_{DS} = 13.7$ V, $I_{DQ} = 150$ mA, $Z_o = 50 \Omega$
 100 to 1000 MHz (50 MHz Step)
 1000 to 2500 MHz (100 MHz Step)

[S-Parameter](#) [1JXTL-E"供应商](#)
(V_{DS} = 4.5 V, I_{DQ} = 150 mA, Z_o = 50 Ω)

f (MHz)	S11		S21		S12		S22	
	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)
100	0.942	-62.0	12.61	141.7	0.036	52.5	0.426	-76.6
150	0.920	-85.7	11.22	128.5	0.045	38.2	0.455	-99.8
200	0.885	-105.8	10.04	116.4	0.050	28.2	0.473	-115.6
250	0.854	-120.3	9.15	107.5	0.053	20.8	0.484	-126.7
300	0.836	-130.3	8.11	100.8	0.054	15.1	0.503	-134.5
350	0.814	-138.2	7.32	95.3	0.055	10.3	0.509	-140.5
400	0.809	-144.2	6.64	90.6	0.056	6.2	0.517	-145.0
450	0.806	-148.9	6.04	86.7	0.056	2.3	0.520	-148.5
500	0.802	-152.9	5.54	82.9	0.056	-0.7	0.526	-151.5
550	0.796	-156.2	5.10	79.5	0.056	-3.6	0.530	-154.1
600	0.795	-159.2	4.71	76.4	0.055	-6.4	0.535	-156.2
650	0.795	-162.0	4.37	73.2	0.055	-8.8	0.540	-158.1
700	0.795	-164.5	4.06	70.3	0.055	-11.1	0.544	-159.8
750	0.796	-166.8	3.79	67.5	0.054	-13.1	0.550	-161.5
800	0.795	-168.7	3.53	64.6	0.053	-15.4	0.556	-162.9
850	0.796	-170.6	3.33	62.1	0.053	-17.2	0.561	-164.3
900	0.799	-172.6	3.15	59.5	0.052	-19.0	0.567	-165.6
950	0.802	-174.5	2.97	57.0	0.052	-20.7	0.574	-166.7
1000	0.802	-175.9	2.80	54.8	0.051	-22.6	0.580	-168.0
1050	0.802	-177.5	2.65	52.3	0.050	-24.4	0.586	-169.2
1100	0.803	-179.3	2.51	50.1	0.050	-26.0	0.592	-170.4
1150	0.807	-179.3	2.39	47.9	0.049	-27.4	0.597	-171.4
1200	0.809	-177.6	2.27	45.4	0.048	-28.8	0.602	-172.5
1250	0.813	-176.3	2.16	43.1	0.047	-30.2	0.606	-173.8
1300	0.818	-175.1	2.06	41.0	0.047	-31.6	0.612	-174.7
1350	0.818	-173.9	1.97	38.8	0.046	-33.0	0.617	-175.7
1400	0.820	-172.8	1.88	36.7	0.045	-34.1	0.620	-176.7
1450	0.817	-171.6	1.80	34.8	0.044	-35.4	0.625	-177.9
1500	0.821	-170.1	1.72	32.9	0.043	-36.5	0.630	-178.9
1550	0.825	-168.7	1.64	30.9	0.043	-37.7	0.635	-179.9
1600	0.830	-167.5	1.57	28.9	0.042	-38.9	0.639	-178.6
1650	0.832	-166.6	1.51	26.9	0.041	-40.0	0.646	-177.6
1700	0.833	-165.5	1.45	24.9	0.040	-41.0	0.649	-176.5
1750	0.831	-164.0	1.41	22.9	0.039	-42.1	0.654	-175.3
1800	0.833	-162.4	1.36	21.0	0.039	-42.7	0.660	-174.2
1850	0.836	-160.8	1.32	19.5	0.038	-43.6	0.664	-173.0
1900	0.842	-159.3	1.28	17.9	0.037	-44.3	0.670	-171.9
1950	0.854	-157.9	1.23	16.4	0.037	-45.5	0.675	-170.7
2000	0.869	-156.9	1.19	14.9	0.036	-46.4	0.682	-169.6
2050	0.871	-156.4	1.15	13.3	0.035	-47.2	0.684	-168.5
2100	0.870	-155.7	1.11	11.4	0.034	-48.2	0.689	-167.3
2150	0.864	-154.5	1.07	9.3	0.034	-48.6	0.696	-166.2
2200	0.860	-153.1	1.04	7.2	0.033	-49.4	0.699	-165.2
2250	0.858	-151.9	1.01	5.5	0.032	-50.1	0.702	-164.1
2300	0.855	-150.3	0.98	3.8	0.032	-50.8	0.706	-162.8
2350	0.860	-149.1	0.95	2.5	0.031	-51.5	0.713	-161.7
2400	0.868	-147.7	0.92	0.5	0.031	-51.9	0.714	-160.7
2450	0.868	-146.7	0.89	-1.1	0.030	-52.4	0.716	-159.6
2500	0.865	-145.2	0.86	-3.2	0.029	-53.1	0.720	-158.3

(V_{DS} = 6 V, I_{DQ} = 150 mA, Z_o = 50 Ω)

f (MHz)	S11		S21		S12		S22	
	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)
100	0.941	-60.5	15.47	142.1	0.030	53.5	0.476	-61.7
150	0.916	-83.6	13.68	129.2	0.040	40.8	0.471	-83.8
200	0.886	-102.5	12.16	117.5	0.044	30.8	0.468	-100.1
250	0.856	-115.8	11.01	109.0	0.047	23.1	0.465	-112.0
300	0.838	-125.6	9.74	102.6	0.049	17.0	0.475	-120.8
350	0.824	-133.4	8.74	96.9	0.050	11.9	0.475	-127.9
400	0.816	-139.4	7.89	92.0	0.050	7.5	0.479	-133.1
450	0.812	-144.5	7.17	87.8	0.051	3.6	0.482	-137.2
500	0.807	-148.8	6.50	83.7	0.051	0.2	0.485	-140.7
550	0.804	-152.6	5.99	80.2	0.051	-2.6	0.489	-143.7
600	0.800	-155.8	5.50	76.9	0.050	-5.6	0.495	-146.1
650	0.797	-158.7	5.09	73.9	0.050	-8.2	0.500	-148.3
700	0.800	-161.7	4.73	70.5	0.049	-10.6	0.506	-150.3
750	0.800	-164.1	4.40	67.6	0.049	-12.6	0.513	-152.2
800	0.801	-166.2	4.11	64.7	0.048	-15.1	0.520	-153.9
850	0.802	-168.3	3.87	62.0	0.048	-16.7	0.526	-155.3
900	0.802	-170.3	3.65	59.4	0.047	-18.6	0.535	-156.9
950	0.803	-171.9	3.44	56.9	0.046	-20.4	0.543	-158.3
1000	0.807	-173.7	3.24	54.5	0.046	-22.2	0.551	-159.7
1050	0.806	-175.5	3.08	51.9	0.045	-24.0	0.559	-161.1
1100	0.808	-177.2	2.91	49.8	0.044	-25.7	0.566	-162.5
1150	0.811	-178.9	2.77	47.2	0.043	-27.1	0.574	-163.7
1200	0.815	-179.6	2.63	44.9	0.043	-28.5	0.580	-165.0
1250	0.818	-178.1	2.50	42.5	0.042	-29.9	0.586	-166.4
1300	0.824	-176.8	2.39	40.2	0.041	-31.2	0.594	-167.6
1350	0.824	-175.8	2.28	38.0	0.040	-32.6	0.600	-168.7
1400	0.827	-174.4	2.17	36.1	0.040	-33.6	0.605	-169.9
1450	0.825	-173.1	2.07	33.9	0.039	-34.9	0.611	-171.2
1500	0.827	-171.6	1.98	31.9	0.038	-36.0	0.617	-172.5
1550	0.832	-170.3	1.89	30.1	0.037	-37.1	0.622	-173.8
1600	0.838	-168.9	1.81	27.9	0.036	-38.2	0.628	-175.2
1650	0.842	-168.0	1.74	25.9	0.036	-39.2	0.636	-176.4
1700	0.840	-166.8	1.68	23.6	0.035	-40.2	0.640	-177.6
1750	0.838	-165.3	1.62	21.6	0.034	-41.1	0.646	-179.0
1800	0.840	-163.7	1.57	19.9	0.033	-41.5	0.652	-179.8
1850	0.843	-162.0	1.51	18.1	0.033	-42.3	0.658	-178.5
1900	0.852	-160.4	1.47	16.7	0.032	-42.9	0.664	-177.2
1950	0.860	-159.1	1.41	15.2	0.031	-43.9	0.670	-175.9
2000	0.873	-158.1	1.36	13.6	0.031	-44.6	0.677	-174.7
2050	0.879	-157.4	1.31	12.0	0.030	-45.4	0.680	-173.5
2100	0.877	-156.7	1.26	10.1	0.029	-46.1	0.686	-172.1
2150	0.871	-155.4	1.22	8.0	0.029	-46.3	0.693	-171.0
2200	0.869	-154.2	1.19	6.0	0.028	-46.9	0.697	-169.8
2250	0.865	-152.8	1.15	4.1	0.027	-47.4	0.701	-168.7
2300	0.863	-151.2	1.12	2.4	0.027	-47.7	0.705	-167.3
2350	0.868	-149.6	1.08	0.8	0.026	-48.2	0.712	-166.2
2400	0.875	-148.6	1.05	-0.9	0.026	-48.2	0.713	-165.1
2450	0.876	-147.4	1.01	-2.7	0.025	-48.7	0.716	-163.9
2500	0.872	-146.1	0.98	-4.6	0.025	-49.0	0.720	-162.4

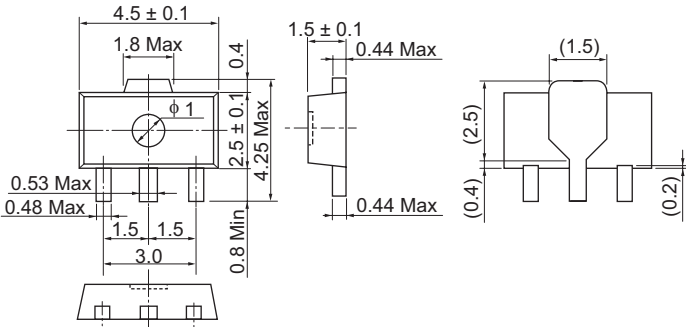
[S-Parameter](#) [1JXTL-E"供应商](#)
(V_{DS} = 7.5 V, I_{DQ} = 150 mA, Z_o = 50 Ω)

f (MHz)	S11		S21		S12		S22	
	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)
100	0.946	-58.3	17.64	143.8	0.027	55.8	0.500	-52.7
150	0.920	-80.2	15.56	130.9	0.036	42.9	0.483	-73.1
200	0.889	-98.1	13.78	119.7	0.040	32.7	0.470	-88.9
250	0.867	-110.4	12.44	111.4	0.043	25.1	0.460	-101.0
300	0.844	-120.8	10.97	104.3	0.045	18.8	0.453	-110.0
350	0.832	-129.0	9.80	98.4	0.046	13.5	0.458	-117.7
400	0.821	-135.6	8.80	93.3	0.047	8.9	0.461	-123.3
450	0.819	-141.1	7.96	88.8	0.047	4.8	0.463	-127.8
500	0.816	-145.8	7.25	84.6	0.047	1.2	0.466	-131.6
550	0.809	-149.8	6.64	80.7	0.047	-1.8	0.469	-135.0
600	0.807	-153.2	6.09	77.4	0.046	-4.7	0.475	-137.7
650	0.804	-156.5	5.63	74.1	0.046	-7.3	0.481	-140.0
700	0.806	-159.3	5.22	70.7	0.046	-9.8	0.488	-142.4
750	0.806	-161.9	4.86	67.7	0.045	-12.1	0.494	-144.5
800	0.806	-164.2	4.54	64.7	0.044	-14.3	0.502	-146.3
850	0.807	-166.3	4.26	62.0	0.044	-16.3	0.510	-148.2
900	0.808	-168.6	4.02	59.3	0.043	-18.0	0.519	-149.9
950	0.811	-170.4	3.79	56.8	0.043	-19.9	0.528	-151.5
1000	0.812	-172.2	3.57	54.3	0.042	-21.8	0.537	-153.1
1050	0.816	-174.0	3.38	51.8	0.041	-23.4	0.546	-154.6
1100	0.814	-175.8	3.21	49.3	0.041	-25.2	0.555	-156.1
1150	0.818	-177.5	3.05	47.0	0.040	-26.5	0.563	-157.6
1200	0.820	-179.1	2.89	44.5	0.039	-28.0	0.569	-159.1
1250	0.826	-179.4	2.75	42.1	0.038	-29.3	0.578	-160.6
1300	0.829	-178.0	2.62	39.8	0.037	-30.7	0.585	-161.9
1350	0.831	-176.8	2.50	37.5	0.037	-31.9	0.592	-163.2
1400	0.832	-175.5	2.38	35.4	0.036	-33.1	0.597	-164.6
1450	0.830	-174.1	2.28	33.2	0.035	-34.0	0.605	-166.0
1500	0.835	-172.6	2.17	31.3	0.034	-35.1	0.611	-167.4
1550	0.835	-171.2	2.07	29.2	0.034	-36.2	0.618	-168.8
1600	0.843	-169.7	1.98	27.1	0.033	-37.2	0.624	-170.4
1650	0.846	-168.8	1.90	25.1	0.032	-38.1	0.632	-171.6
1700	0.845	-167.4	1.83	22.9	0.031	-38.9	0.636	-173.0
1750	0.845	-166.1	1.77	21.1	0.030	-39.8	0.642	-174.5
1800	0.845	-164.5	1.71	19.1	0.030	-40.0	0.649	-175.9
1850	0.848	-162.7	1.65	17.2	0.029	-40.8	0.656	-177.2
1900	0.855	-161.2	1.60	15.7	0.028	-41.3	0.661	-178.6
1950	0.867	-159.9	1.54	14.3	0.028	-42.0	0.668	-180.0
2000	0.880	-158.8	1.49	12.6	0.027	-42.5	0.676	-178.7
2050	0.883	-158.1	1.43	10.9	0.026	-43.0	0.679	-177.4
2100	0.882	-157.2	1.37	9.1	0.026	-43.5	0.685	-176.0
2150	0.876	-156.1	1.33	7.0	0.025	-43.5	0.692	-174.7
2200	0.873	-154.6	1.29	4.8	0.025	-43.9	0.697	-173.5
2250	0.871	-153.3	1.25	3.1	0.024	-44.0	0.701	-172.2
2300	0.869	-151.8	1.21	1.5	0.023	-44.2	0.705	-170.7
2350	0.873	-150.3	1.17	-0.1	0.023	-44.5	0.712	-169.7
2400	0.880	-149.0	1.14	-2.2	0.022	-44.4	0.714	-168.4
2450	0.881	-147.7	1.10	-3.7	0.022	-44.4	0.717	-167.1
2500	0.878	-146.5	1.06	-5.5	0.021	-44.6	0.721	-165.6

[S-Parameter](#) [1JXTL-E"供应商](#)
(V_{DS} = 13.7 V, I_{DQ} = 150 mA, Z_o = 50 Ω)

f (MHz)	S11		S21		S12		S22	
	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)
100	0.968	-47.9	20.87	150.6	0.017	63.3	0.557	-31.9
150	0.951	-67.8	19.11	137.9	0.024	49.8	0.536	-46.4
200	0.918	-85.0	17.04	126.4	0.028	39.6	0.512	-58.9
250	0.897	-98.0	15.32	117.2	0.031	31.5	0.488	-69.3
300	0.882	-109.0	13.72	109.6	0.033	24.6	0.466	-77.5
350	0.870	-118.4	12.29	102.7	0.034	18.8	0.460	-85.1
400	0.855	-125.9	11.02	97.1	0.034	13.9	0.454	-91.3
450	0.852	-132.2	10.01	92.3	0.035	9.5	0.451	-96.3
500	0.846	-137.6	9.12	87.8	0.035	5.7	0.451	-100.7
550	0.841	-142.4	8.37	83.3	0.035	2.3	0.451	-104.8
600	0.835	-146.5	7.69	79.6	0.035	-0.8	0.456	-108.3
650	0.833	-150.2	7.11	75.8	0.034	-3.5	0.464	-111.6
700	0.833	-153.6	6.58	72.4	0.034	-6.4	0.469	-114.7
750	0.836	-156.5	6.14	68.9	0.033	-8.5	0.477	-117.7
800	0.833	-159.2	5.72	65.9	0.033	-11.0	0.486	-120.4
850	0.832	-161.8	5.37	62.8	0.032	-12.8	0.494	-122.9
900	0.834	-164.1	5.05	59.9	0.032	-14.7	0.503	-125.4
950	0.834	-166.1	4.75	57.1	0.031	-16.4	0.514	-127.8
1000	0.836	-168.2	4.50	54.6	0.031	-18.3	0.525	-130.2
1050	0.837	-170.3	4.24	51.8	0.030	-19.8	0.535	-132.5
1100	0.838	-172.3	4.03	49.1	0.029	-21.4	0.544	-134.7
1150	0.839	-174.5	3.83	46.3	0.029	-22.7	0.554	-136.8
1200	0.843	-176.0	3.63	44.0	0.028	-23.9	0.563	-138.8
1250	0.848	-177.7	3.46	41.6	0.027	-24.9	0.571	-140.9
1300	0.851	-179.3	3.29	39.1	0.026	-25.9	0.580	-142.8
1350	0.851	179.5	3.13	36.8	0.026	-27.0	0.588	-144.7
1400	0.852	177.9	2.98	34.4	0.025	-27.6	0.594	-146.5
1450	0.851	176.4	2.85	32.3	0.024	-28.4	0.602	-148.4
1500	0.853	175.0	2.72	30.0	0.023	-29.1	0.609	-150.3
1550	0.857	173.3	2.59	27.8	0.023	-29.5	0.616	-152.1
1600	0.861	171.8	2.48	25.6	0.022	-30.2	0.623	-154.0
1650	0.864	170.8	2.37	23.5	0.022	-30.3	0.631	-155.7
1700	0.862	169.4	2.29	21.2	0.021	-30.7	0.637	-157.5
1750	0.860	167.9	2.20	19.4	0.020	-30.7	0.643	-159.3
1800	0.861	166.2	2.13	17.3	0.020	-30.4	0.651	-161.0
1850	0.866	164.3	2.05	15.5	0.019	-30.1	0.657	-162.7
1900	0.873	162.6	1.98	13.9	0.019	-29.7	0.664	-164.5
1950	0.884	161.3	1.90	12.2	0.018	-29.7	0.671	-166.2
2000	0.895	160.4	1.83	10.6	0.018	-29.5	0.679	-167.9
2050	0.901	159.5	1.77	8.5	0.017	-28.9	0.683	-169.4
2100	0.898	158.7	1.70	6.7	0.017	-28.5	0.689	-171.1
2150	0.891	157.4	1.65	4.6	0.016	-27.4	0.697	-172.8
2200	0.887	155.9	1.60	2.5	0.016	-26.8	0.702	-174.2
2250	0.882	154.5	1.54	0.7	0.016	-26.2	0.705	-175.7
2300	0.880	153.0	1.49	-0.9	0.015	-24.9	0.709	-177.4
2350	0.887	151.4	1.45	-2.8	0.015	-24.2	0.718	-178.9
2400	0.892	149.9	1.40	-4.7	0.015	-22.7	0.720	179.7
2450	0.894	148.7	1.35	-6.4	0.015	-21.7	0.724	178.3
2500	0.890	147.5	1.31	-8.5	0.015	-20.7	0.727	176.6

查看2SK3391的供应商

Package Name	JEITA Package Code	RENESAS Code	Previous Code	MASS[Typ.]	Unit: mm
UPAK	SC-62	PLZZ0004CA-A	UPAK / UPAKV	0.050g	
 The drawing shows three views of the package: a top view, a side view, and a detail view of the lead. The top view shows a rectangular body with a central circular feature of diameter 1.0 mm. Dimensions include a total width of 4.5 ± 0.1 mm, a body width of 1.8 Max mm, a lead width of 0.4 mm, a body length of 2.5 ± 0.1 mm, and a total length of 4.25 Max mm. The lead length is 0.53 Max mm and 0.48 Max mm. The lead thickness is 1.5 mm. The side view shows a total height of 1.5 ± 0.1 mm, a lead height of 0.44 Max mm, and a body height of 0.44 Max mm. The detail view shows a lead thickness of 0.4 mm and a lead width of 1.5 mm.					

Ordering Information

Part Name	Quantity	Shipping Container
2SK3391JXTL-E	1000 pcs.	φ178 mm Reel, 12 mm Emboss Taping

Note: For some grades, production may be terminated. Please contact the Renesas sales office to check the state of production before ordering the product.

Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Notes:

1. This document is provided for reference purposes only so that Renesas customers may select the appropriate Renesas products for their use. Renesas neither makes warranties or representations with respect to the accuracy or completeness of the information contained in this document nor grants any license to any intellectual property rights or any other rights of Renesas or any third party with respect to the information in this document.
2. Renesas shall have no liability for damages or infringement of any intellectual property or other rights arising out of the use of any information in this document, including, but not limited to, product data, diagrams, charts, programs, algorithms, and application circuit examples.
3. You should not use the products or the technology described in this document for the purpose of military applications such as the development of weapons of mass destruction or for the purpose of any other military use. When exporting the products or technology described herein, you should follow the applicable export control laws and regulations, and procedures required by such laws and regulations.
4. All information included in this document such as product data, diagrams, charts, programs, algorithms, and application circuit examples, is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas products listed in this document, please confirm the latest product information with a Renesas sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas such as that disclosed through our website. (<http://www.renesas.com>)
5. Renesas has used reasonable care in compiling the information included in this document, but Renesas assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.
6. When using or otherwise relying on the information in this document, you should evaluate the information in light of the total system before deciding about the applicability of such information to the intended application. Renesas makes no representations, warranties or guarantees regarding the suitability of its products for any particular application and specifically disclaims any liability arising out of the application and use of the information in this document or Renesas products.
7. With the exception of products specified by Renesas as suitable for automobile applications, Renesas products are not designed, manufactured or tested for applications or otherwise in systems the failure or malfunction of which may cause a direct threat to human life or create a risk of human injury or which require especially high quality and reliability such as safety systems, or equipment or systems for transportation and traffic, healthcare, combustion control, aerospace and aeronautics, nuclear power, or undersea communication transmission. If you are considering the use of our products for such purposes, please contact a Renesas sales office beforehand. Renesas shall have no liability for damages arising out of the uses set forth above.
8. Notwithstanding the preceding paragraph, you should not use Renesas products for the purposes listed below:
 - (1) artificial life support devices or systems
 - (2) surgical implantations
 - (3) healthcare intervention (e.g., excision, administration of medication, etc.)
 - (4) any other purposes that pose a direct threat to human lifeRenesas shall have no liability for damages arising out of the uses set forth in the above and purchasers who elect to use Renesas products in any of the foregoing applications shall indemnify and hold harmless Renesas Technology Corp., its affiliated companies and their officers, directors, and employees against any and all damages arising out of such applications.
9. You should use the products described herein within the range specified by Renesas, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas shall have no liability for malfunctions or damages arising out of the use of Renesas products beyond such specified ranges.
10. Although Renesas endeavors to improve the quality and reliability of its products, IC products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Please be sure to implement safety measures to guard against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other applicable measures. Among others, since the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
11. In case Renesas products listed in this document are detached from the products to which the Renesas products are attached or affixed, the risk of accident such as swallowing by infants and small children is very high. You should implement safety measures so that Renesas products may not be easily detached from your products. Renesas shall have no liability for damages arising out of such detachment.
12. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written approval from Renesas.
13. Please contact a Renesas sales office if you have any questions regarding the information contained in this document, Renesas semiconductor products, or if you have any other inquiries.



RENESAS SALES OFFICES

<http://www.renesas.com>

Refer to "<http://www.renesas.com/en/network>" for the latest and detailed information.

Renesas Technology America, Inc.
450 Holger Way, San Jose, CA 95134-1368, U.S.A
Tel: <1> (408) 382-7500, Fax: <1> (408) 382-7501

Renesas Technology Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: <44> (1628) 585-100, Fax: <44> (1628) 585-900

Renesas Technology (Shanghai) Co., Ltd.
Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd, Pudong District, Shanghai, China 200120
Tel: <86> (21) 5877-1818, Fax: <86> (21) 6887-7898

Renesas Technology Hong Kong Ltd.
7th Floor, North Tower, World Finance Centre, Harbour City, 1 Canton Road, Tsimshatsui, Kowloon, Hong Kong
Tel: <852> 2265-6688, Fax: <852> 2730-6071

Renesas Technology Taiwan Co., Ltd.
10th Floor, No.99, Fushing North Road, Taipei, Taiwan
Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

Renesas Technology Singapore Pte. Ltd.
1 Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632
Tel: <65> 6213-0200, Fax: <65> 6278-8001

Renesas Technology Korea Co., Ltd.
Kukje Center Bldg. 18th Fl., 191, 2-ka, Hangang-ro, Yongsan-ku, Seoul 140-702, Korea
Tel: <82> (2) 796-3115, Fax: <82> (2) 796-2145

Renesas Technology Malaysia Sdn. Bhd
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No.18, Jalan Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: <603> 7955-9390, Fax: <603> 7955-9510