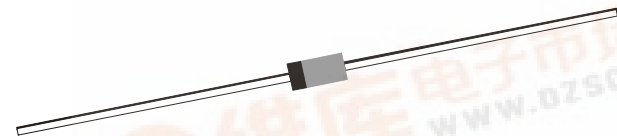


## HIGH SPEED SILICON SWITCHING DIODE AXIAL LEAD

CTZ 2.6 to 47  
500mWDO- 35  
Glass Axial Package

## FEATURES

These Zeners Are Best Suited For Industrial Purpose , Military &amp; Space applications.

Hermetically Sealed Glass With Double Stud And Glass Passivated Chip Provides Excellent Stability and Reliability.

## ABSOLUTE MAXIMUM RATINGS (Ta=25°C unless specified otherwise)

| DESCRIPTION                         | SYMBOL           | VALUE      | UNIT |
|-------------------------------------|------------------|------------|------|
| Power Dissipation @Ta=25°C          | P <sub>TA</sub>  | 500        | mW   |
| Surge Power Dissipation<br>tp=8.3mS | P <sub>S</sub>   | 5          | W    |
| Junction Temperature                | T <sub>J</sub>   | 175        | °C   |
| Storage Temperature                 | T <sub>stg</sub> | -65 to+175 | °C   |


## ELECTRICAL CHARACTERISTICS (Ta=25°C unless specified otherwise)

| DESCRIPTION                                 | SYMBOL               | VALUE | UNIT  |
|---------------------------------------------|----------------------|-------|-------|
| Thermal Resistance<br>Junction Ambient      | R <sub>th(j-a)</sub> | 0.3   | °C/mW |
| Forward Voltage<br>at I <sub>F</sub> =200mA | V <sub>F</sub>       | 1.5   | V     |

## ELECTRICAL CHARACTERISTICS (Ta=25°C unless specified otherwise)

| DEVICE  | V <sub>ZT</sub> @<br>I <sub>ZT</sub> * | r <sub>ZT</sub> @<br>I <sub>ZT</sub> *<br>MAX | I <sub>ZT</sub> | r <sub>ZK</sub> @<br>I <sub>ZK</sub> *<br>MAX | I <sub>ZK</sub> | Temp.<br>Coeff.of<br>Zener Voltage<br>typ | I <sub>R</sub> @<br>V <sub>R</sub> | V <sub>R</sub> | I <sub>ZM</sub><br>MAX | I <sub>ZSM</sub><br>MAX |
|---------|----------------------------------------|-----------------------------------------------|-----------------|-----------------------------------------------|-----------------|-------------------------------------------|------------------------------------|----------------|------------------------|-------------------------|
|         | (V)                                    | (Ω)                                           | (mA)            | (Ω)                                           | (mA)            | (%/°C)                                    | (μA)                               | (V)            | (mA)                   | (mA)                    |
| CTZ2.6  | 2.6                                    | 30                                            | 20              | 600                                           | 1               | -0.085                                    | 75                                 | 1              | 147.8                  |                         |
| CTZ2.7  | 2.7                                    | 30                                            | 20              | 600                                           | 1               | -0.085                                    | 75                                 | 1              | 168.3                  |                         |
| CTZ3.0  | 3.0                                    | 48                                            | 20              | 600                                           | 1               | -0.075                                    | 20                                 | 1              | 148.5                  | 1500                    |
| CTZ 3.3 | 3.3                                    | 44                                            | 20              | 600                                           | 1               | -0.070                                    | 10                                 | 1              | 135                    | 1375                    |
| CTZ 3.6 | 3.6                                    | 42                                            | 20              | 600                                           | 1               | -0.065                                    | 5                                  | 1              | 126                    | 1260                    |
| CTZ3.9  | 3.9                                    | 40                                            | 20              | 600                                           | 1               | -0.060                                    | 5                                  | 1              | 115                    | 1165                    |
| CTZ 4.3 | 4.3                                    | 36                                            | 20              | 600                                           | 1               | -0.055                                    | 0.5                                | 1              | 105                    | 1060                    |
| CTZ 4.7 | 4.7                                    | 32                                            | 20              | 600                                           | 1               | -0.043                                    | 10                                 | 2              | 95                     | 965                     |
| CTZ 5.1 | 5.1                                    | 28                                            | 20              | 550                                           | 1               | +/-0.030                                  | 5                                  | 2              | 87                     | 890                     |
| CTZ 5.6 | 5.6                                    | 16                                            | 20              | 450                                           | 1               | +/-0.028                                  | 10                                 | 3              | 80                     | 810                     |
| CTZ 6.2 | 6.2                                    | 6                                             | 210             | 200                                           | 1               | +0.045                                    | 10                                 | 4              | 72                     | 730                     |
| CTZ 6.8 | 6.8                                    | 6                                             | 20              | 150                                           | 1               | +0.050                                    | 5                                  | 5              | 65                     | 665                     |

CTZ2.6\_47Rev081001

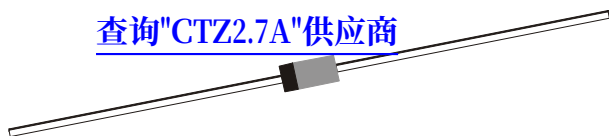
[查询"CTZ2.7A"供应商](#)DO- 35  
Glass Axial Package

| DEVICE  | $V_{ZT} @$<br>$I_{ZT} *$ | $r_{ZT} @$<br>$I_{ZT} *$<br>MAX | $I_{ZT}$ | $r_{ZK} @$<br>$I_{ZK} *$<br>MAX | $I_{ZK}$ | Temp.<br>Coeff.of<br>Zener Voltage<br>typ | $I_R @$<br>$V_R$ | $V_R$ | $I_{ZM}$<br>MAX | $I_{ZSM}$<br>MAX |
|---------|--------------------------|---------------------------------|----------|---------------------------------|----------|-------------------------------------------|------------------|-------|-----------------|------------------|
|         | (V)                      | ( $\Omega$ )                    | (mA)     | ( $\Omega$ )                    | (mA)     | (%/°C)                                    | ( $\mu$ A)       | (V)   | (mA)            | (mA)             |
| CTZ 7.5 | 7.5                      | 8                               | 10       | 50                              | 1        | +0.058                                    | 1.0              | 6     | 60              | 605              |
| CTZ 8.2 | 8.2                      | 10                              | 10       | 50                              | 1        | +0.062                                    | 0.52             | 7     | 55              | 555              |
| CTZ9.1  | 9.1                      | 12                              | 10       | 50                              | 1        | +0.068                                    | 0.1              | 7     | 49              | 500              |
| CTZ 10  | 10                       | 14                              | 10       | 70                              | 1        | +0.075                                    | 0.1              | 8     | 45              | 455              |
| CTZ 11  | 11                       | 15                              | 10       | 700                             | 0.25     | +0.073                                    | 0.1              | 9     | 41              | 410              |
| CTZ 12  | 12                       | 19                              | 10       | 700                             | 0.25     | 0.076                                     | 0.1              | 10    | 37              | 380              |
| CTZ 13  | 13                       | 23                              | 5        | 700                             | 0.25     | +0.079                                    | 0.1              | 11    | 35              | 350              |
| CTZ 15  | 15                       | 27                              | 5        | 700                             | 0.25     | +0.082                                    | 0.1              | 13    | 30              | 300              |
| CTZ 16  | 16                       | 31                              | 5        | 700                             | 0.25     | +0.083                                    | 0.1              | 14    | 28              | 285              |
| CTZ 18  | 18                       | 35                              | 5        | 750                             | 0.25     | +0.085                                    | 0.1              | 16    | 25              | 250              |
| CTZ 20  | 20                       | 39                              | 5        | 750                             | 0.25     | +0.086                                    | 0.1              | 18    | 22              | 225              |
| CTZ 22  | 22                       | 67                              | 5        | 750                             | 0.25     | +0.087                                    | 0.1              | 19    | 20              | 205              |
| CTZ 24  | 24                       | 75                              | 5        | 750                             | 0.25     | +0.088                                    | 0.1              | 20    | 18.6            | 190              |
| CTZ27   | 27                       | 77                              | 5        | 750                             | 0.25     | +0.090                                    | 0.1              | 22    | 16.5            | 170              |
| CTZ30   | 30                       | 93                              | 5        | 1000                            | 0.25     | +0.091                                    | 0.1              | 24    | 15              | 150              |
| CTZ33   | 33                       | 96                              | 5        | 1000                            | 0.25     | +0.092                                    | 0.1              | 26    | 13.5            | 135              |
| CTZ36   | 36                       | 146                             | 5        | 1000                            | 0.25     | +0.093                                    | 0.1              | 28    | 12.4            | 125              |
| CTZ39   | 39                       | 192                             | 5        | 1000                            | 0.25     | +0.094                                    | 0.1              | 30    | 11.4            | 115              |
| CTZ43   | 43                       | 246                             | 5        | 1500                            | 0.25     | +0.095                                    | 0.1              | 35    | 10.4            | 105              |
| CTZ 47  | 47                       | 286                             | 5        | 1500                            | 0.25     | +0.095                                    | 0.1              | 42    | 9.5             | 95               |

Available in  $\pm 10\%$  Tolerance. Add Suffix "A" for  $\pm 5\%$  Tolerance

\* Pulse Condition : 20ms &lt; 50ms, Duty Cycle &lt;2%

### DO-35 Glass Axial Package

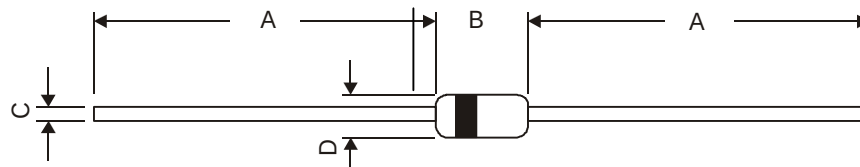


NOTE: Cathode is marked by Band.

| DIM | MIN   | MAX  |
|-----|-------|------|
| A   | 25.40 | —    |
| B   | 3.05  | 4.15 |
| C   | 0.46  | 0.56 |
| D   | 1.70  | 2.29 |

All dimensions are in mm.

### DO-35, 52mm Taping Specification

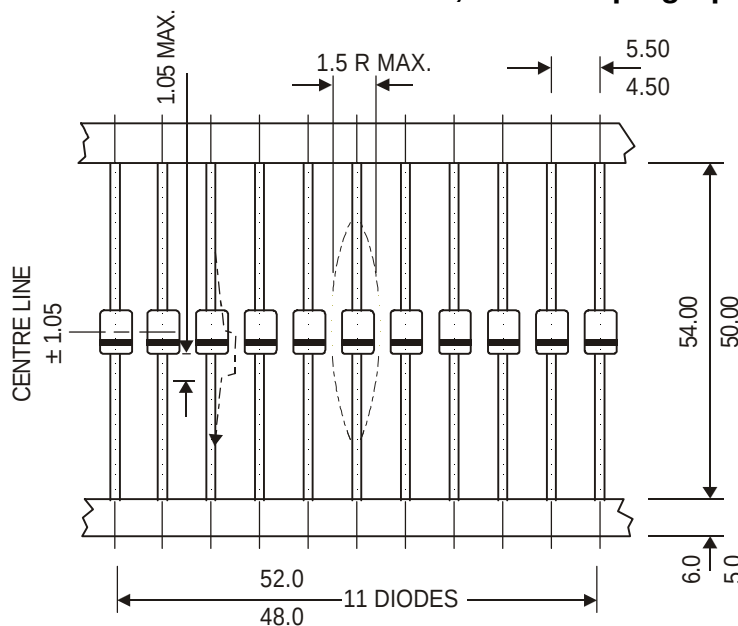


All dimensions are in mm.

### 52 mm Taping Specification

1. T & A indicates Axial Tape and Ammo Packing (52 mm Tape Spacing).
2. 300 mm (min) leader tape on every tape.
3. No. of empty places allowed 0.25% without consecutive empty places.
4. Ends of leads shall preferably not protrude beyond the tapes.
5. Components shall be held sufficiently in the tape or tapes so that they can not come free in normal handling.

### DIODE AMMO PACK

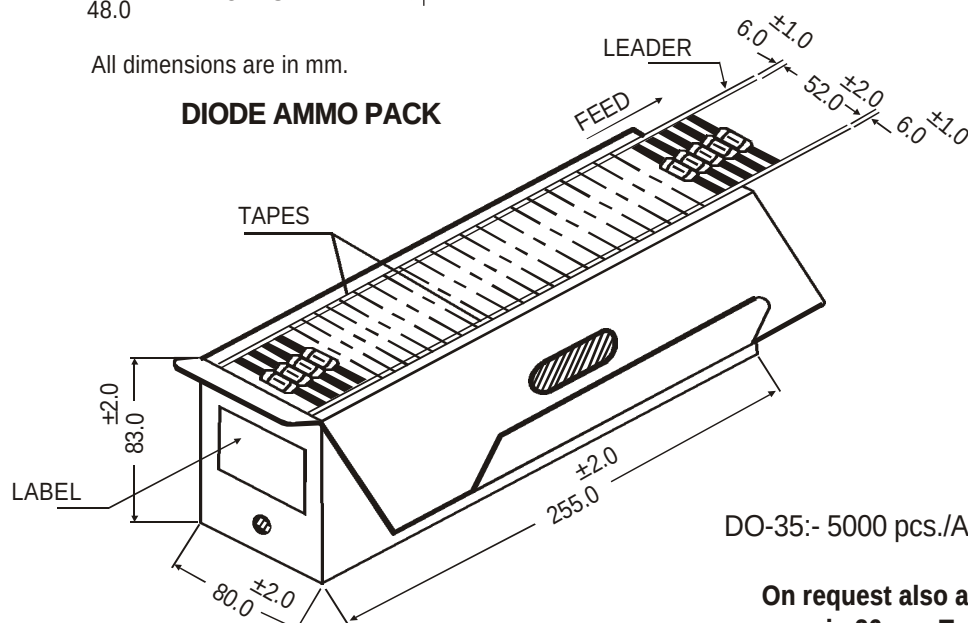

DO-35:- 5000 pcs./Ammo Pack

On request also available  
in 26 mm Tape

### Packing Detail

| PACKAGE   | STANDARD PACK |                | INNER CARTON BOX  |     | OUTER CARTON BOX    |      |        |
|-----------|---------------|----------------|-------------------|-----|---------------------|------|--------|
|           | Details       | Net Weight/Qty | Size              | Qty | Size                | Qty  | Gr Wt  |
| DO-35 T&A | 5K/ammo box   | 0.88 kg/5K pcs | 10" x 3.2" x 3.2" | 5K  | 12.7" x 12.7" x 20" | 125K | 25 kgs |

**Component Disposal Instructions**  
[查询"CTZ2.7A"供应商](#)

1. CDIL Semiconductor Devices are RoHS compliant, customers are requested to please dispose as per prevailing Environmental Legislation of their Country.
2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).

**Customer Notes**

**Disclaimer**

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of  
**Continental Device India Limited**

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119

email@cdil.com www.cdilsemi.com