

SKM 400GB066D



Trench IGBT Modules

SKM 400GB066D

Preliminary Data

Features


- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability, self limiting to $6 \times I_C$

Typical Applications

- AC inverter drives
- UPS
- Electronic welders

Remarks

- Case temperature limited to $T_C = 125^\circ\text{C}$ max, recommended $T_{op} = -40 \dots +150^\circ\text{C}$
- Product reliability results are valid for $T_j \leq 150^\circ\text{C}$
- Short circuit data: $t_p \leq 6\mu\text{s}$; $V_{GE} \leq 15\text{V}$; $T_j = 150^\circ\text{C}$; $V_{cc} \leq 360\text{V}$, use of soft R_G necessary !
- Take care of over-voltage caused by stray inductances

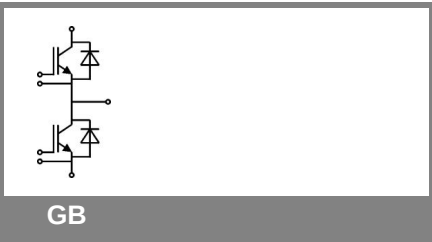

Characteristics					
Symbol	Conditions	min.	typ.	max.	Units
Inverse Diode					
$V_F = V_{EC}$	$I_{Fnom} = 400\text{ A}$; $V_{GE} = 0\text{ V}$ $T_j = 25^\circ\text{C}_{chiplev.}$		1,4	1,6	V
V_{F0}	$T_j = 25^\circ\text{C}$		0,95	1	V
r_F	$T_j = 25^\circ\text{C}$		1,1	1,5	mΩ
I_{RRM}	$I_{Fnom} = 400\text{ A}$ $T_j = 150^\circ\text{C}$		410		A
Q_{rr}	$di/dt = 7250\text{ A}/\mu\text{s}$		62		μC
E_{rr}	$V_{GE} = -8\text{ V}$; $V_{CC} = 300\text{ V}$		14		mJ
$R_{th(j-c)D}$	per diode			0,2	K/W
Module					
L_{CE}			15	20	nH
$R_{CC'+EE'}$	res., terminal-chip $T_{case} = 25^\circ\text{C}$		0,35		mΩ
	$T_{case} = 125^\circ\text{C}$		0,5		mΩ
$R_{th(c-s)}$	per module			0,038	K/W
M_s	to heat sink M6	3		5	Nm
M_t	to terminals M6	2,5		5	Nm
w				325	g

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

SKM 400GB066D



Trench IGBT Modules

SKM 400GB066D

Preliminary Data

Features


- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability, self limiting to $6 \times I_C$

Typical Applications

- AC inverter drives
- UPS
- Electronic welders







Remarks

- Case temperature limited to $T_C = 125^\circ\text{C}$ max, recommended $T_{op} = -40 \dots +150^\circ\text{C}$
- Product reliability results are valid for $T_j \leq 150^\circ\text{C}$
- Short circuit data: $t_p \leq 6\mu\text{s}$; $V_{GE} \leq 15\text{V}$; $T_j = 150^\circ\text{C}$; $V_{cc} \leq 360\text{V}$, use of soft R_G necessary !
- Take care of over-voltage caused by stray inductances






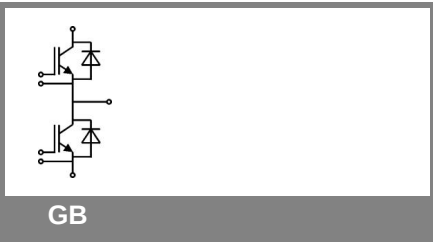


Symbol	Conditions	Values	Units
$Z_{th(j-c)I}$			
R_i	$i = 1$	80	mk/W
R_i	$i = 2$	22,5	mk/W
R_i	$i = 3$	6,4	mk/W
R_i	$i = 4$	1,1	mk/W
τ_{ui}	$i = 1$	0,0447	s
τ_{ui}	$i = 2$	0,0223	s
τ_{ui}	$i = 3$	0,0015	s
τ_{ui}	$i = 4$	0,0002	s
$Z_{th(j-c)D}$			
R_i	$i = 1$	130	mk/W
R_i	$i = 2$	55	mk/W
R_i	$i = 3$	12,5	mk/W
R_i	$i = 4$	2,5	mk/W
τ_{ui}	$i = 1$	0,054	s
τ_{ui}	$i = 2$	0,01	s
τ_{ui}	$i = 3$	0,0015	s
τ_{ui}	$i = 4$	0,1	s

查询"SKM400GB066D_06"供应商

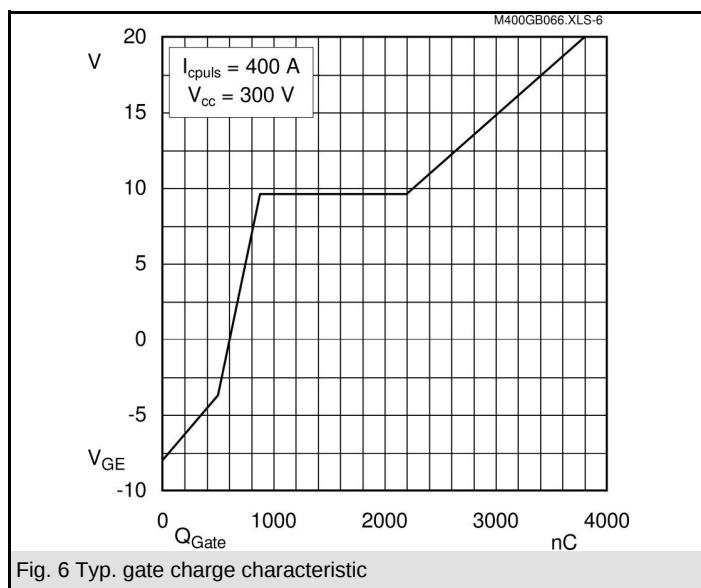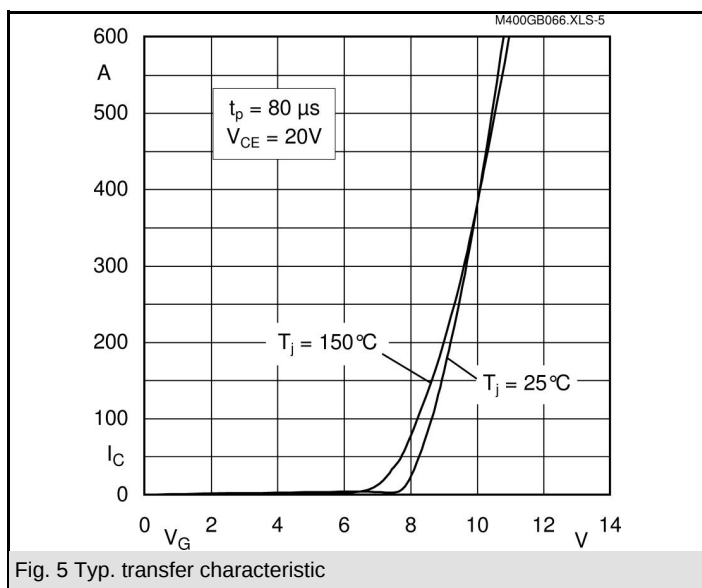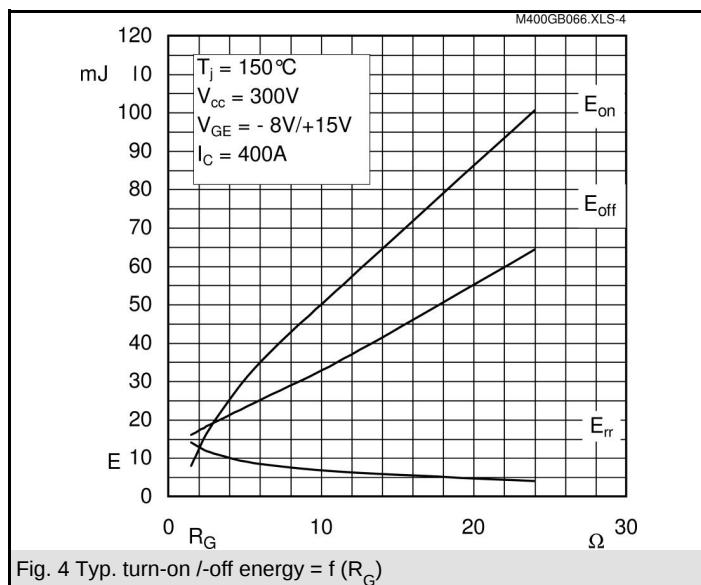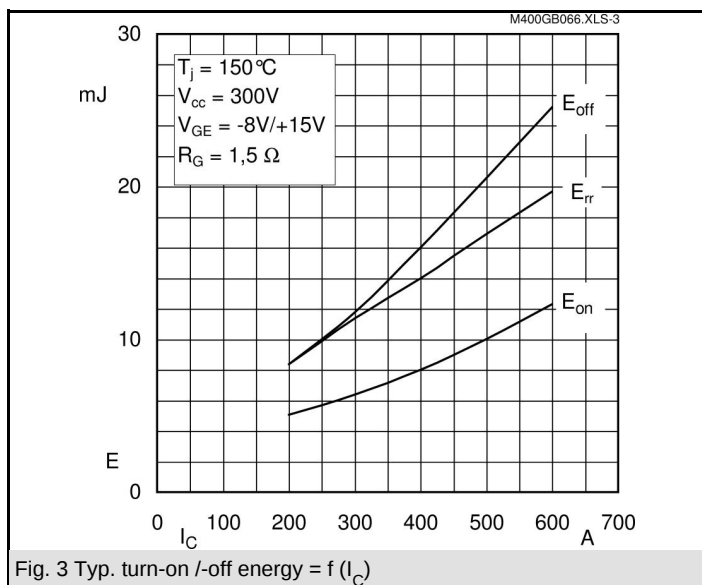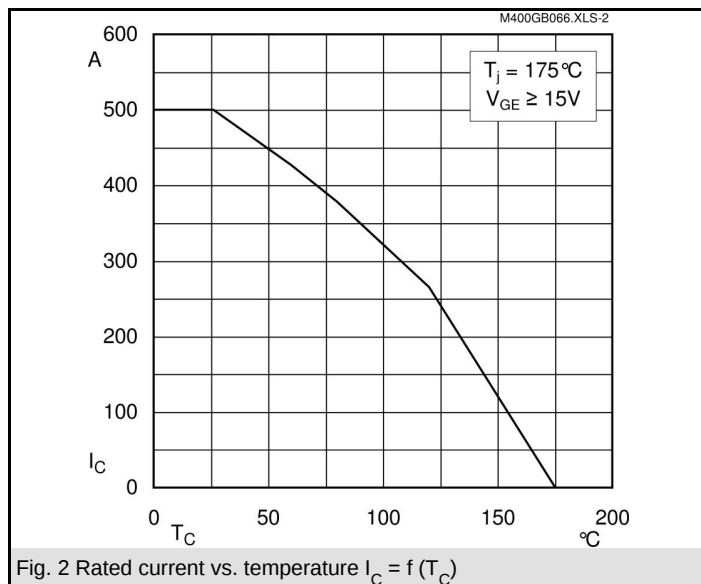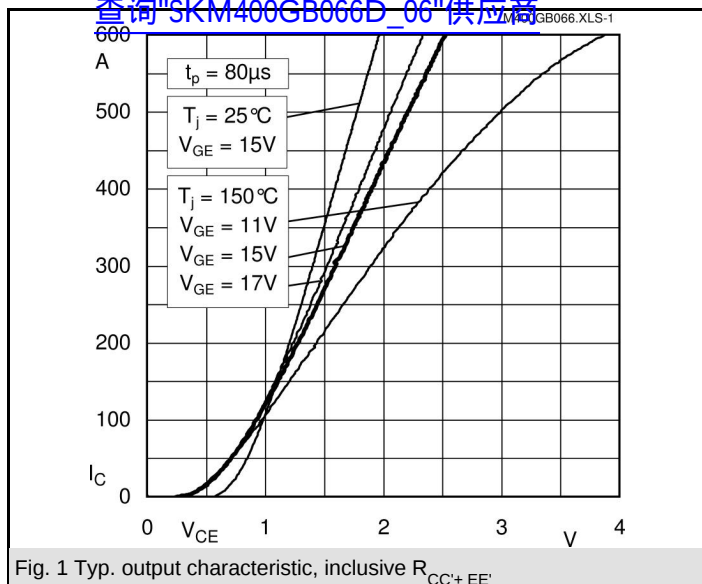


查询"SKM400GB066D_06"供应商

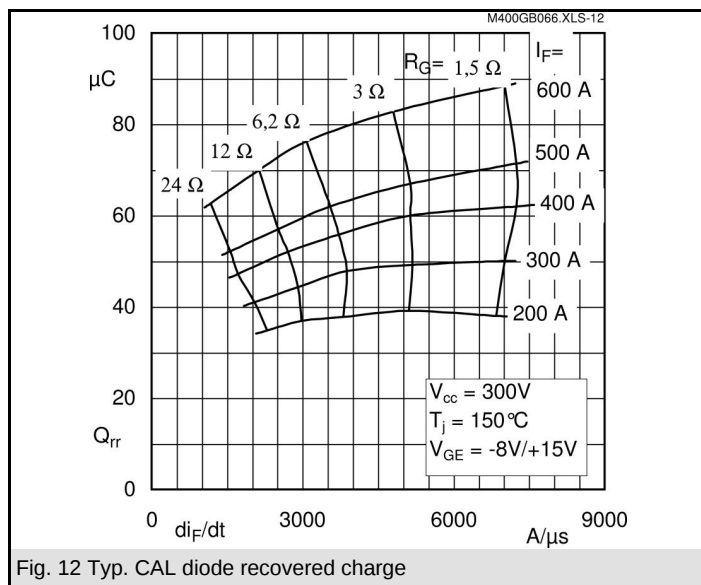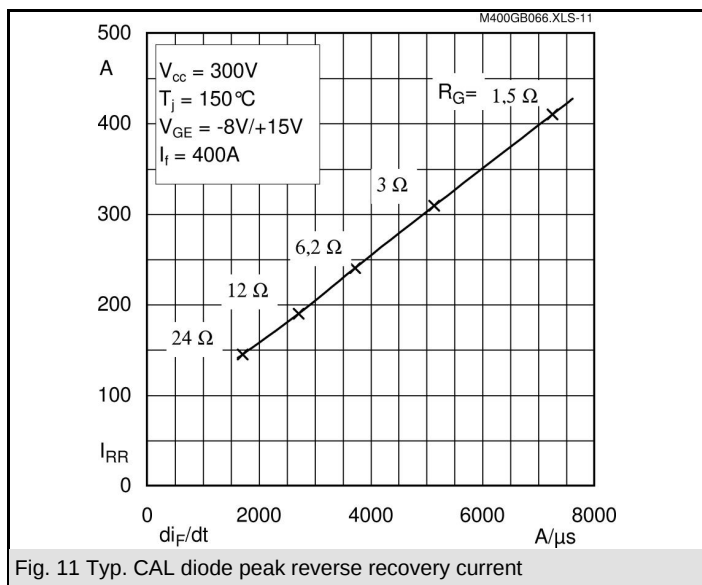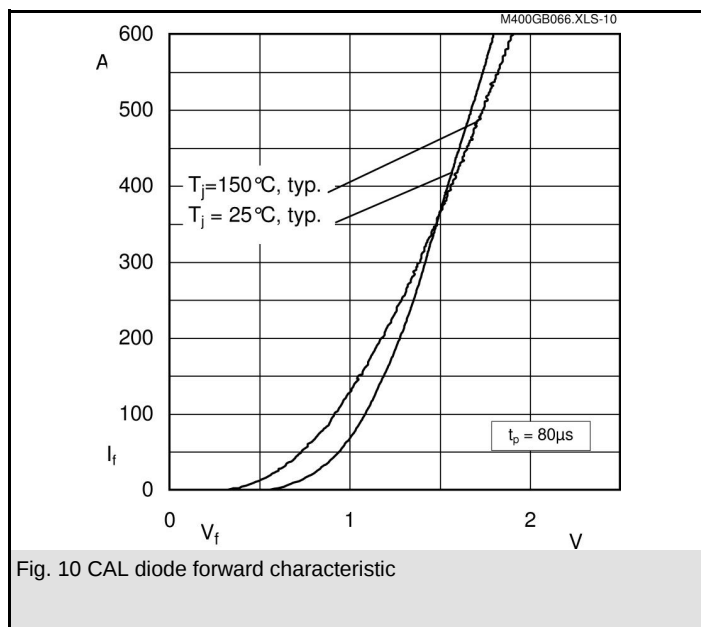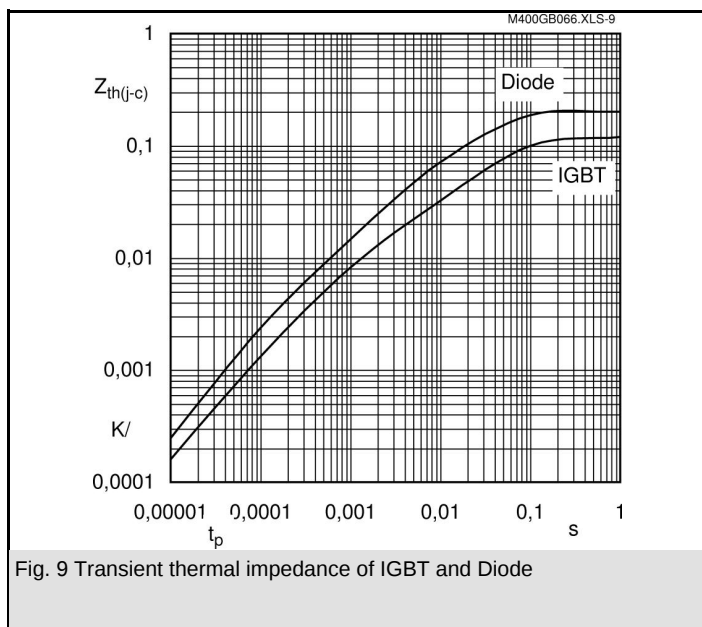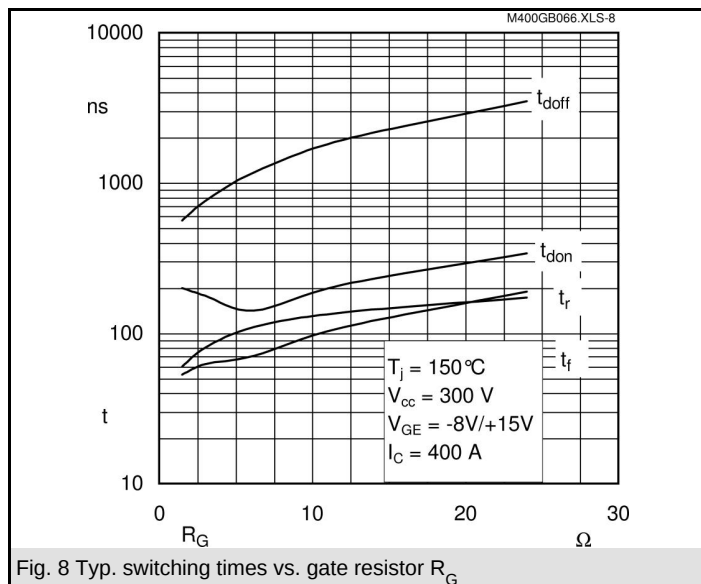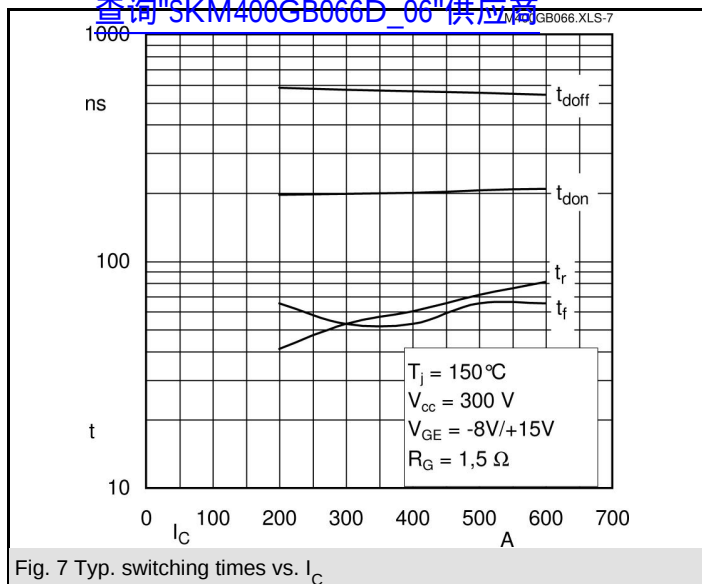


[查询"SKM400GB066D_06"供应商](#)

CASED56

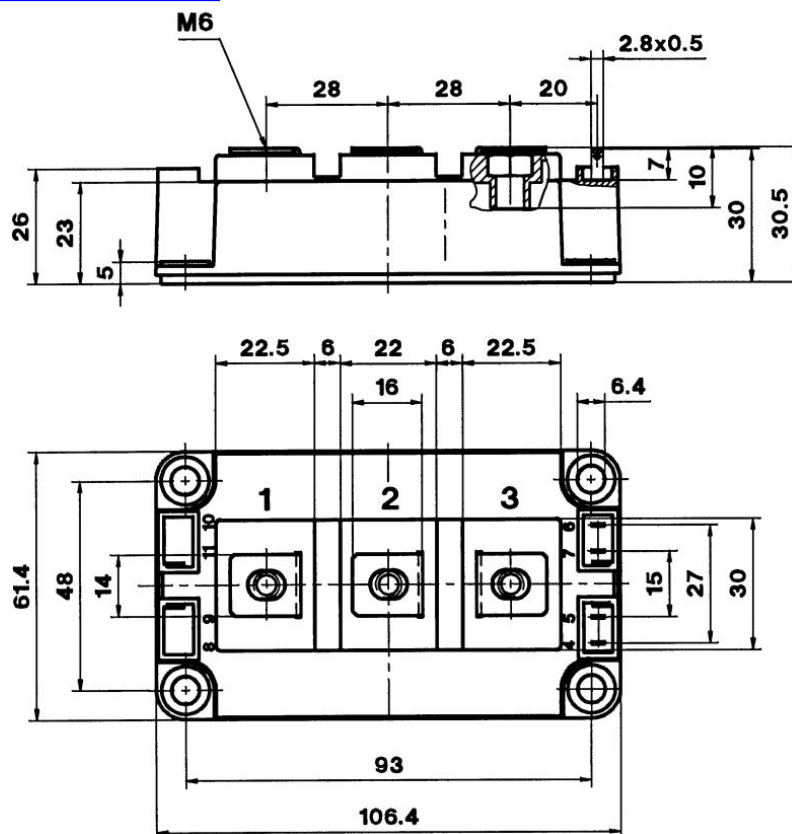

Case D 56

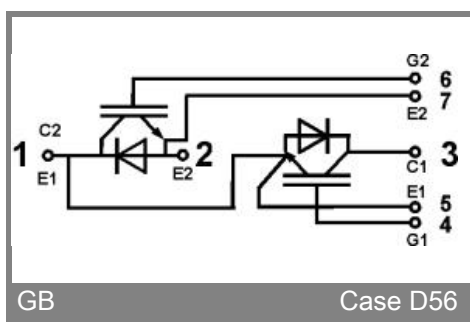

GB

Case D56