

# PRODUCT SPECIFICATION

**Model No : CSM-57362EG**

## Descriptions:

- 3.0Inch Dot-Matrix Display
- Dot Pitch 11.43mm
- 5\*7 Array with X-Y Select.
- CSM-57362: Column Cathode, Row Anode
- Emitting Color: Orange & Yellow Green



| CUSTOMER APPROVED<br>SIGNATURES | APPROVED BY | CHECKED BY | PREPARED BY |
|---------------------------------|-------------|------------|-------------|
|                                 |             |            |             |

### CHINA SEMICONDUCTOR CORPORATION

Address:2FL. NO.909,Chung-Cheng Road,  
Chung-Ho City Taipei Hsien,Taiwan.

Tel:886-2-2223-9696

Fax:886-2-2223-9377

### OPTO PLUS TECHNOLOGIES CO.,LTD

Address:696 Shun jiang Rd.,Ji Shan St.Shaoxing,  
ZheJiang,China

Tel:86-0575-88623888

Fax:86-0575-88623112

Model No : CSM-57362EG


## Features -

1. 3.0 inch (76.2mm) Matrix height.
2. Case mold type.
3. RoHs compliant.
4. Low power consumption.
5. Easy mounting on P.C. board or socket.

## Device Selection Guide -

| Part No.    | Chip     |               | Column  | Row   |
|-------------|----------|---------------|---------|-------|
|             | Material | Emitted Color |         |       |
| CSM-57362EG | GaAsP    | Orange        | Cathode | Anode |
|             | GaP      | Yellow-Green  |         |       |

## Package Dimensions -

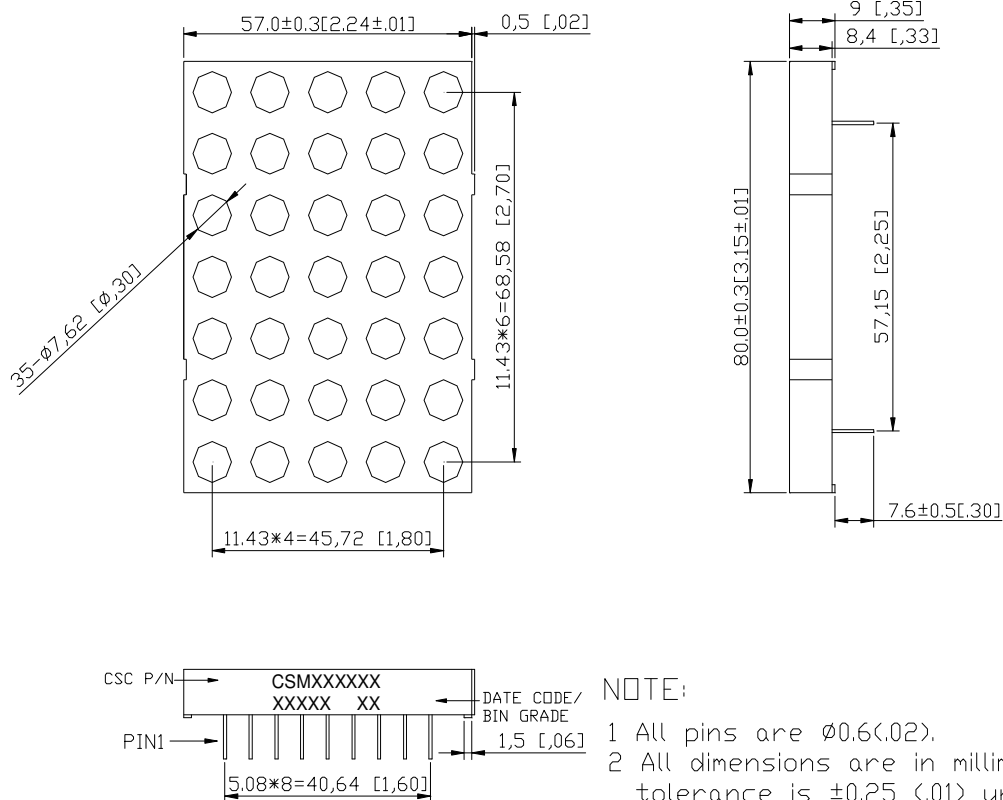


## NOTE:

- 1 All pins are  $\phi 0.6$  (.02).
- 2 All dimensions are in millimeters (inch), tolerance is  $\pm 0.25$  (.01) unless otherwise noted.

Model No : CSM-57362EG

Internal Circuit Diagrams -

CSM-57362

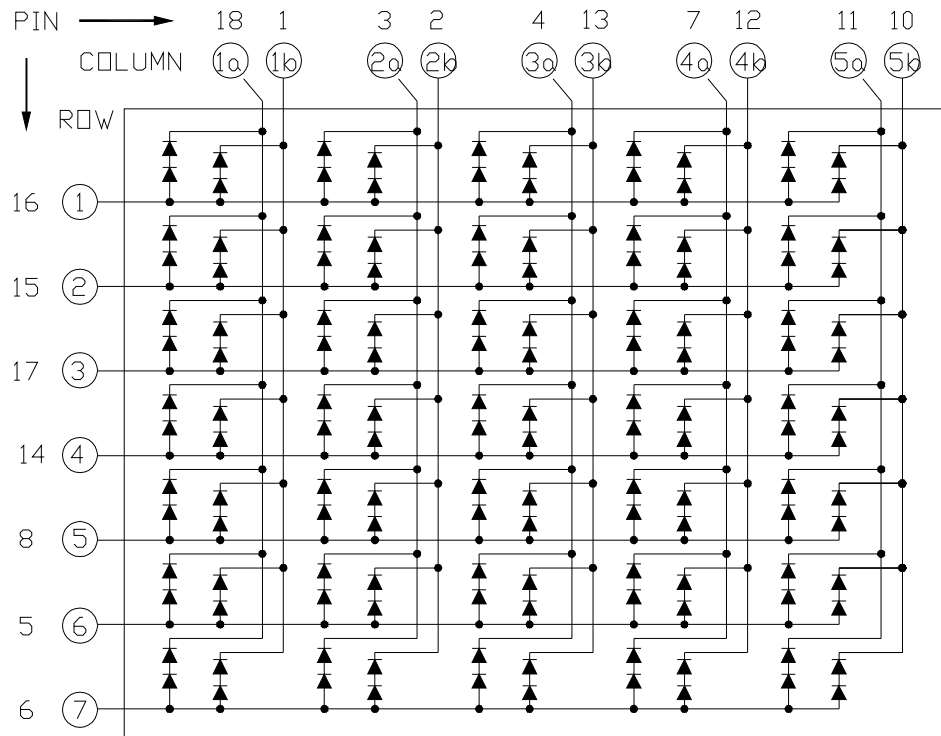

| CSM-57362 |                   |         |                   |
|-----------|-------------------|---------|-------------------|
| PIN NO.   | FUNCTION          | PIN NO. | FUNCTION          |
| 1         | Cathode Column 1b | 10      | Cathode Column 5b |
| 2         | Cathode Column 2b | 11      | Cathode Column 5a |
| 3         | Cathode Column 2a | 12      | Cathode Column 4b |
| 4         | Cathode Column 3a | 13      | Cathode Column 3b |
| 5         | Anode Row 6       | 14      | Anode Row 4       |
| 6         | Anode Row 7       | 15      | Anode Row 2       |
| 7         | Cathode Column 4a | 16      | Anode Row 1       |
| 8         | Anode Row 5       | 17      | Anode Row 3       |
| 9         | No Connect        | 18      | Cathode Column 1a |

NOTE: "a" for Orange color chip  
"b" for Yellow Green color chip

Model No : CSM-57362EG

■ Absolute Maximum Rating -

| Orange                                                                 |                  | (Ta=25℃)  |      |
|------------------------------------------------------------------------|------------------|-----------|------|
| Parameter                                                              | Symbol           | Rating    | Unit |
| Power Dissipation Per Dice                                             | P <sub>AD</sub>  | 70        | mW   |
| Continuous Forward Current Per Dice                                    | I <sub>AF</sub>  | 25        | mA   |
| Peak Current Per Dice(duty cycle 1/10, 1kHz)                           | I <sub>PF</sub>  | 90        | mA   |
| Derating Linear From 25℃ Per Dice                                      | -                | 0.33      | mA/℃ |
| Reverse Voltage Per Dice                                               | V <sub>R</sub>   | 5         | V    |
| Operating Temp.                                                        | T <sub>opr</sub> | -35 ~ +85 | ℃    |
| Storage Temp.                                                          | T <sub>stg</sub> | -35 ~ +85 | ℃    |
| Solder temperature 1/16 inch below seating plane for 3 seconds at 260℃ |                  |           |      |

| Yellow Green                                                           |                  | (Ta=25℃)  |      |
|------------------------------------------------------------------------|------------------|-----------|------|
| Parameter                                                              | Symbol           | Rating    | Unit |
| Power Dissipation Per Dice                                             | P <sub>AD</sub>  | 70        | mW   |
| Continuous Forward Current Per Dice                                    | I <sub>AF</sub>  | 25        | mA   |
| Peak Current Per Dice(duty cycle 1/10, 1kHz)                           | I <sub>PF</sub>  | 90        | mA   |
| Derating Linear From 25℃ Per Dice                                      | -                | 0.33      | mA/℃ |
| Reverse Voltage Per Dice                                               | V <sub>R</sub>   | 5         | V    |
| Operating Temp.                                                        | T <sub>opr</sub> | -35 ~ +85 | ℃    |
| Storage Temp.                                                          | T <sub>stg</sub> | -35 ~ +85 | ℃    |
| Solder temperature 1/16 inch below seating plane for 3 seconds at 260℃ |                  |           |      |

Model No : CSM-57362EG

■ Electro-optical Characteristics -

| Orange                            |                | (Ta=25°C) |          |          |      |                                  |
|-----------------------------------|----------------|-----------|----------|----------|------|----------------------------------|
| Parameter                         | Symbol         | Min.      | Typ.     | Max.     | Unit | Condition                        |
| Forward Voltage Per Dot           | V <sub>F</sub> | -         | 4.0(2.0) | 5.6(2.8) | V    | I <sub>F</sub> =20mA             |
| Luminous Intensity Per Dot        | I <sub>v</sub> | -         | 10       | -        | mcd  | I <sub>F</sub> =10mA             |
| Peak Emission Wavelength          | λ <sub>p</sub> | -         | 632      | -        | nm   | I <sub>F</sub> =20mA             |
| Dominant Wavelength               | λ <sub>d</sub> | -         | 624      | -        | nm   | I <sub>F</sub> =20mA             |
| Spectrum Radiation Bandwidth      | Δ λ            | -         | 35       | -        | nm   | I <sub>F</sub> =20mA             |
| Reverse Current                   | I <sub>R</sub> | -         | -        | 100      | μA   | V <sub>R</sub> =10V              |
| Luminous Intensity Matching Ratio | IV-m           | -         | -        | 2:1      | -    | I <sub>p</sub> =80mA<br>1/16Duty |

| Yellow Green                      |                | (Ta=25°C) |          |          |      |                                  |
|-----------------------------------|----------------|-----------|----------|----------|------|----------------------------------|
| Parameter                         | Symbol         | Min.      | Typ.     | Max.     | Unit | Condition                        |
| Forward Voltage Per Dot           | V <sub>F</sub> | -         | 4.2(2.1) | 5.6(2.8) | V    | I <sub>F</sub> =20mA             |
| Luminous Intensity Per Dot        | I <sub>v</sub> | -         | 11       | -        | mcd  | I <sub>F</sub> =10mA             |
| Peak Emission Wavelength          | λ <sub>p</sub> | -         | 568      | -        | nm   | I <sub>F</sub> =20mA             |
| Dominant Wavelength               | λ <sub>d</sub> | -         | 572      | -        | nm   | I <sub>F</sub> =20mA             |
| Spectrum Radiation Bandwidth      | Δ λ            | -         | 30       | -        | nm   | I <sub>F</sub> =20mA             |
| Reverse Current                   | I <sub>R</sub> | -         | -        | 100      | μA   | V <sub>R</sub> =10V              |
| Luminous Intensity Matching Ratio | IV-m           | -         | -        | 2:1      | -    | I <sub>p</sub> =80mA<br>1/16Duty |

Model No : CSM-57362EG

# Typical Electrical / Optical Characteristics Curves -Orange (Ta = 25°C Unless Otherwise Noted)

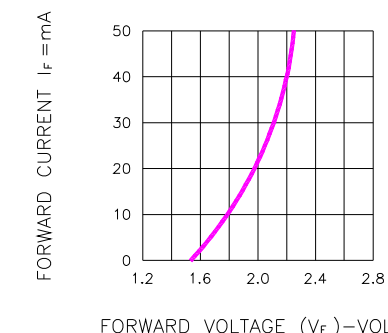


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

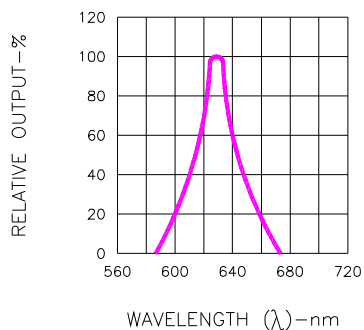


Fig.2 SPECTRAL RESPONSE

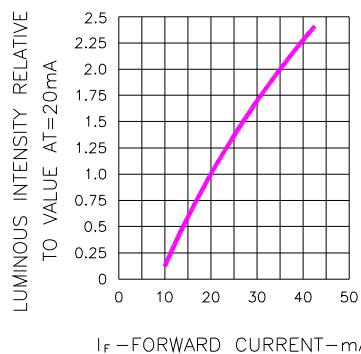


Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

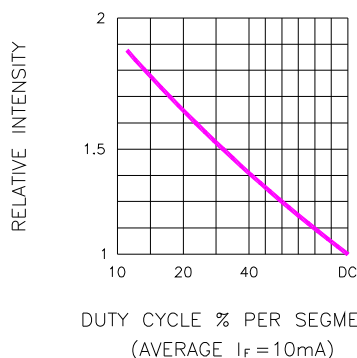


Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

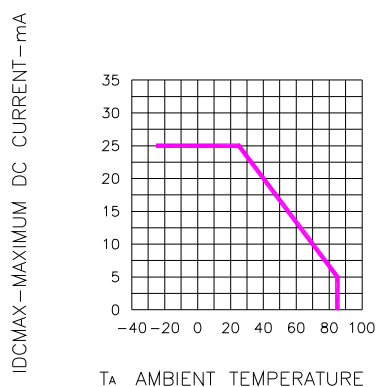


Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE

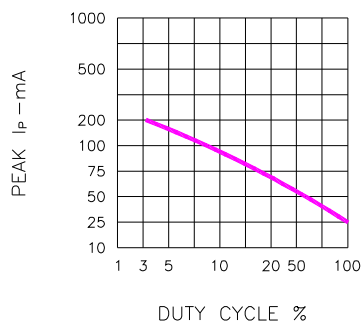


Fig.6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE f=1 KHz)

Model No : CSM-57362EG

## Yellow Green

(Ta = 25°C Unless Otherwise Noted)

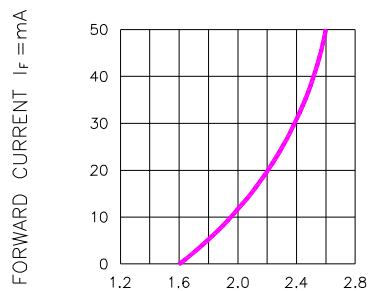


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

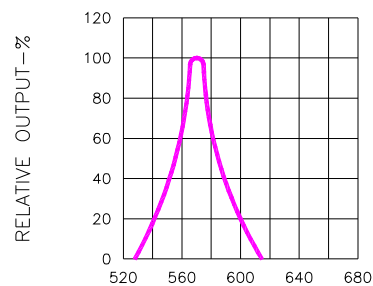


Fig.2 SPECTRAL RESPONSE

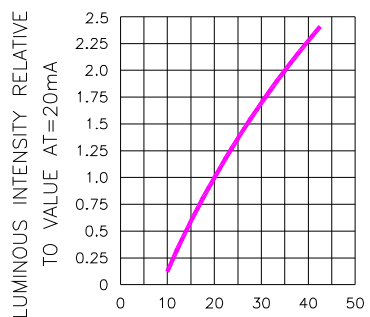


Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

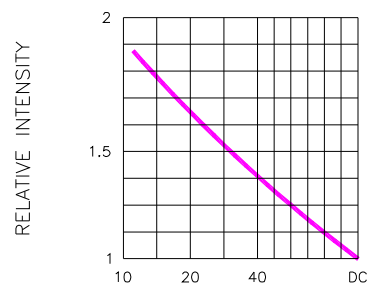


Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

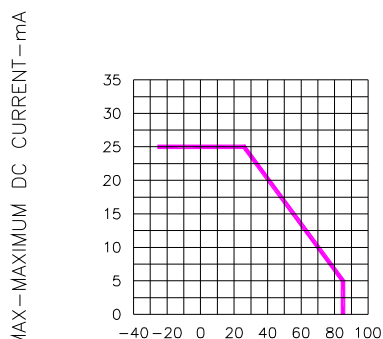


Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE


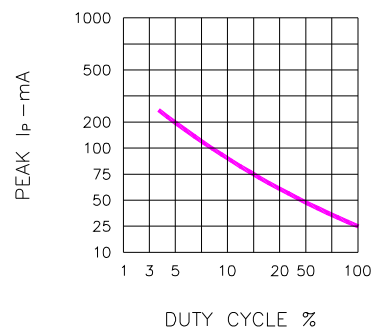


Fig.6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE f=1 KHz)

**Model No: CSM-57362EG**

■ Package Dimensions

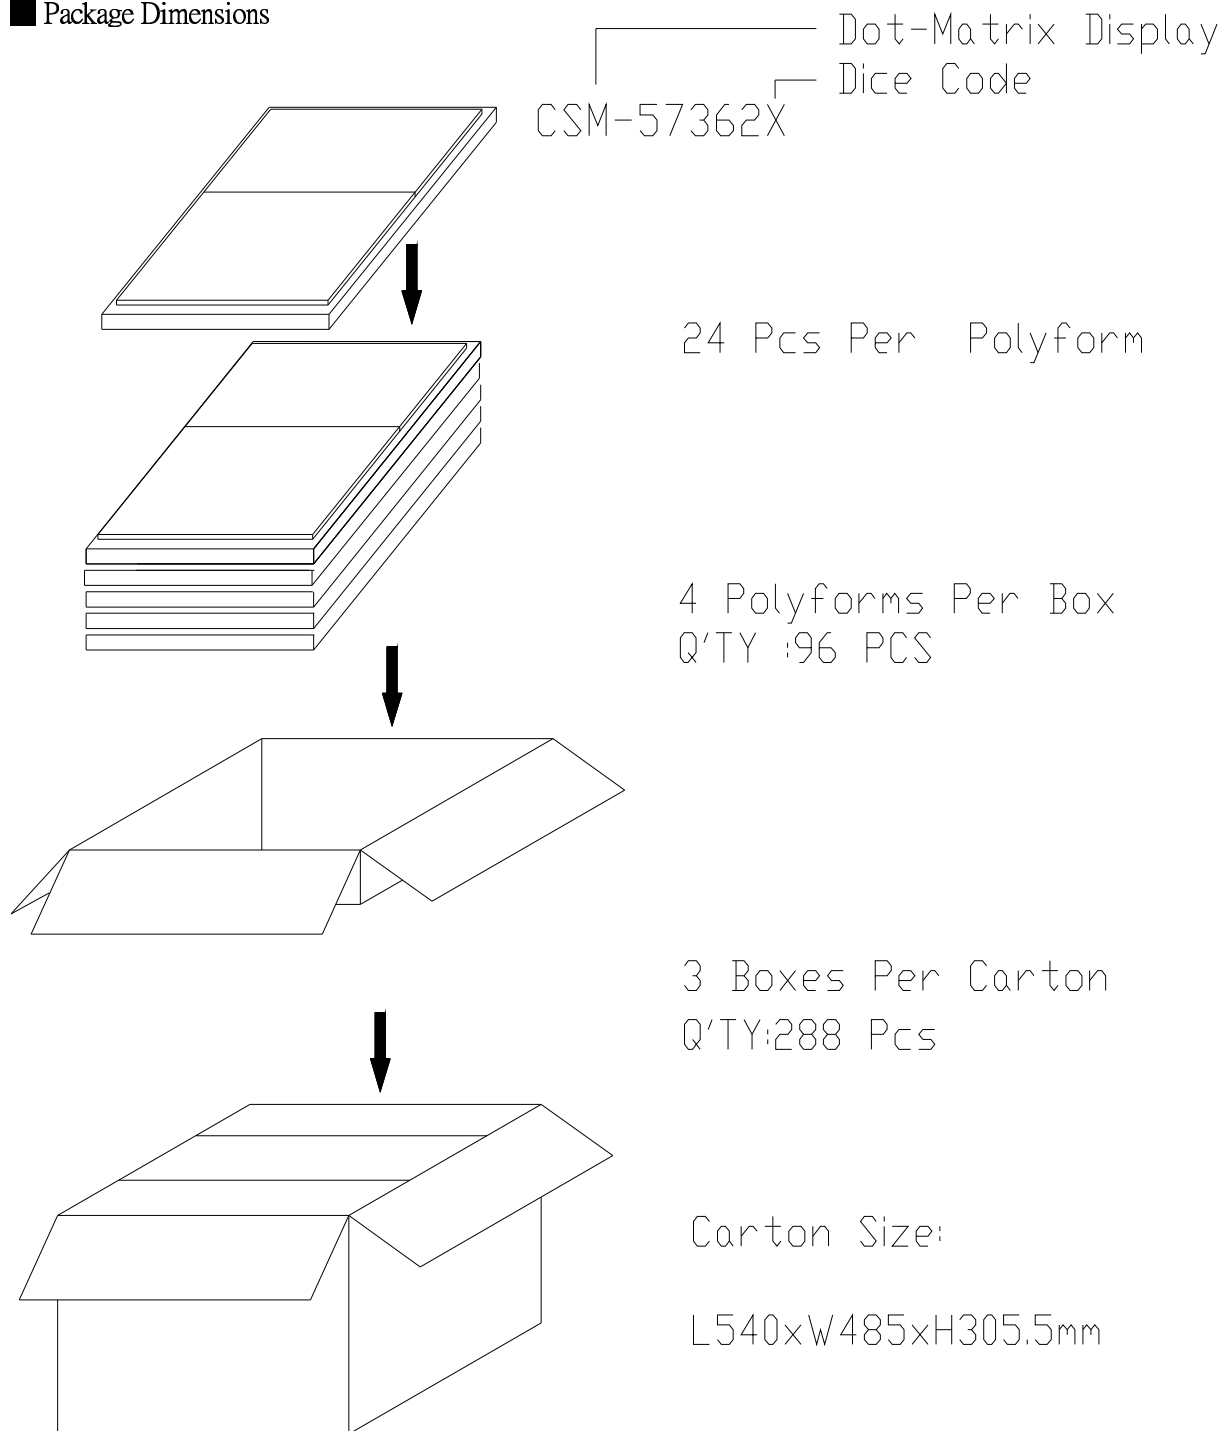

Note: The specifications are subject to change without notice. Please contact us for updated information