


multimec® 3F + 1P/1Q/1R

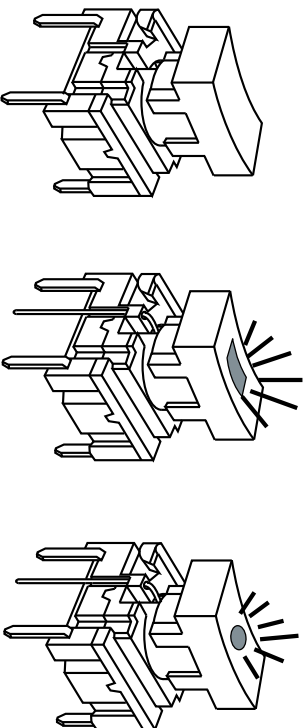

Technical Data:

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
low temp: -55/+115°C
high temp: -40/+160°C

Dimensions (through-hole)	Dimensions (w/LED)	Dimensions (SMD)

How to order

3 F



Switch

Mounting

T through-hole
S surface mount



L 6 low temp.
H 9 high temp.

+

1 P

Cap



Standard versions:
3FTL6
3FTH9
3FSH9

00 blue
02 green
03 grey
04 yellow
06 white
08 red
09 black

3 F



Switch

Mounting

T through-hole



L 6 low temp.
H 9 high temp.



LED

20 green
40 yellow
80 red



1Q



00 blue
03 grey
08 red
09 black

1

Lens

1 transparent

Standard versions:

3FTL6
3FTH9
3FTL6H9
3FTL6S9

1R



Ordering example: 3 FTL680 + 1Q091

MEC · Industriparken 23 · P.O. BOX 26 · DK-2750 Ballerup · Denmark

Tel.: +45 44 97 33 66 · Fax: +45 44 68 15 14 · Web: <http://www.mec.dk> · E-mail: danmec@mec.dk

