

[查询T-11-2500A-P3-SFC-APC 供应商](#)

T-11-2500A-P3-SXX/APC

**Features**

- InGaAs/InP PIN Photodiode with transimpedance amplifier
- High sensitivity with AGC*
- Differential ended output
- Single+3.3V operation
- -40~85°C operating temperature
- SM fiber pigtailed with optional FC/SC APC connector
- 2.5Gbps SDH/SONET/ATM receivers

Absolute Maximum Ratings (Tc=25°C)

Parameter	Symbol	Value	Unit
Supply Voltage	V _{CC}	4.5	V
Operating Temperature	T _{opr}	-40 ~ 85	°C
Storage Temperature	T _{stg}	-40 ~ 85	°C

DC Electrical Characteristics (Tc=25°C)


Parameter	Symbol	Min.	Typ.	Max.	Unit
Power Supply	V _{CC}	3.0	3.3	3.6	V
Differential Output Voltage	V _d	-	0.6	-	V
Supply Current (no load)	I _{cc}	-	34	-	mA

(Operating at v_{CC}=3.3V, Tc=25°C, λ=1310nm, 9/125 μm SM fiber)**AC/Optical and Electrical Characteristics (Tc=25°C)**

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
Detection Range		1100	1310	1650	nm	
Gain@10Mbps Differential	G	-	27	-	V/mW	λ=1310nm
Bandwidth	BW	1600	1800	2000	MHz	
Saturation Power	P _{sat}	-3	0	-	dBm	λ=1310nm
Sensitivity	Sens.	-	-21	-18	dBm	BER=10 ⁻⁹ @2.5Gbps, PRBS=23 Er=10dB
Output Resistance	R _{out}	48	60	72	ohm	V _{RPD} =5V, f=1MHz

Note: 1.Pin assignment can be customized.
2.Specifications subject to change without notice.

Pin Assignment

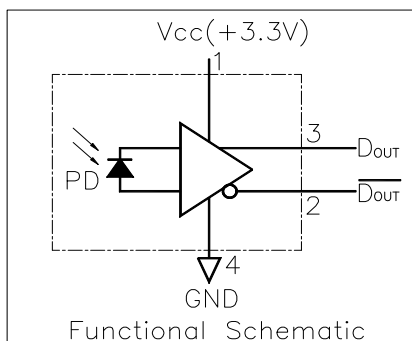


Pin Assignment

- 1~Vcc
- 2~ $\overline{Dout}$
- 3~Dout
- 4~GND(CASE)

Packaging Dimension

Units in mm.

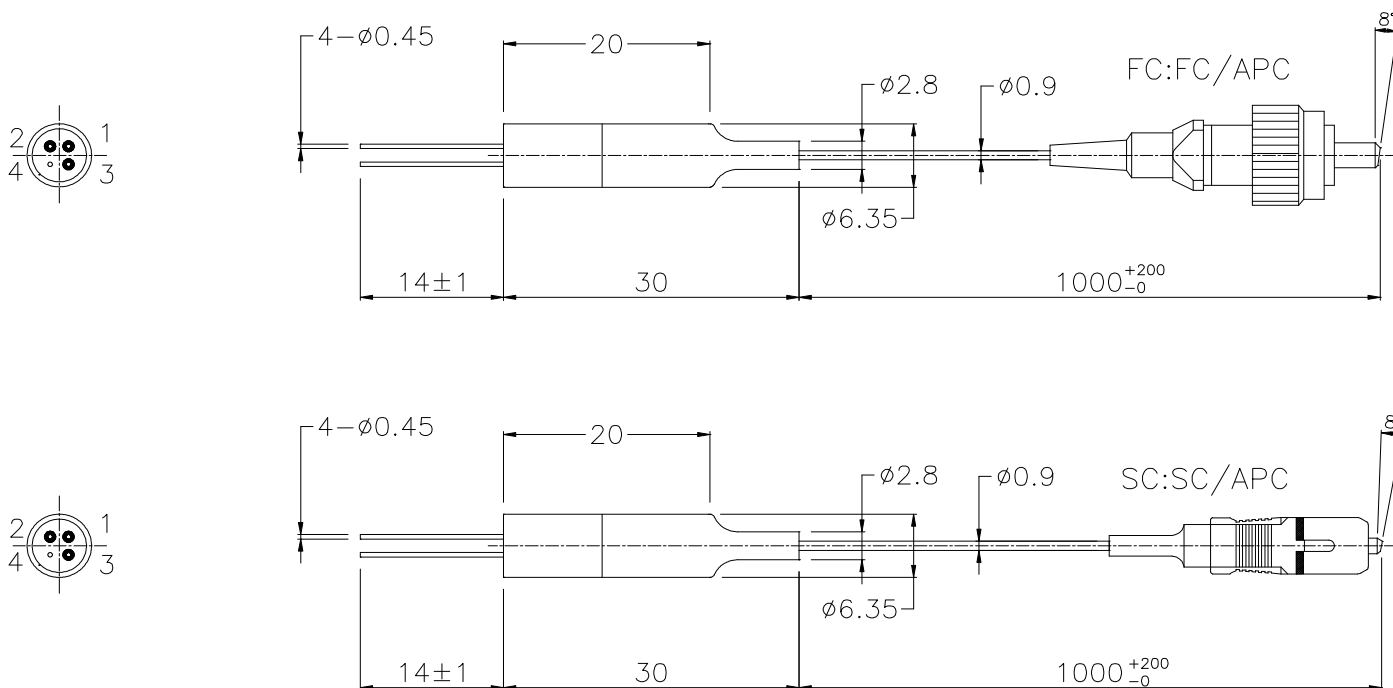


[查询“T-11-2500A-P3-SFC-APC”供应商](#)

T-11-2500A-P3-SXX/APC

Ordering Information

T-11-2500A-P3-SXX/APC

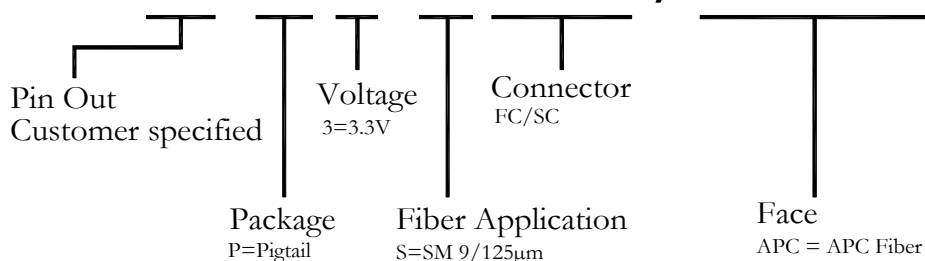

Warnings

Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

Legal Notice

IMPORTANT NOTICE!

All information contained in this document is subject to change without notice, at Luminent's sole and absolute discretion. Luminent warrants performance of its products to current specifications only in accordance with the company's standard one-year warranty; however, specifications designated as "preliminary" are given to describe components only, and Luminent expressly disclaims any and all warranties for said products, including express, implied, and statutory warranties, warranties of merchantability, fitness for a particular purpose, and non-infringement of proprietary rights. Please refer to the company's Terms and Conditions of Sale for further warranty information.

Luminent assumes no liability for applications assistance, customer product design, software performance, or infringement of patents, services, or intellectual property described herein. No license, either express or implied, is granted under any patent right, copyright, or intellectual property right, and Luminent makes no representations or warranties that the product(s) described herein are free from patent, copyright, or intellectual property rights. Products described in this document are NOT intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. Luminent customers using or selling products for use in such applications do so at their own risk and agree to fully defend and indemnify Luminent for any damages resulting from such use or sale.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED ON AN "AS IS" BASIS. Customer agrees that Luminent is not liable for any actual, consequential, exemplary, or other damages arising directly or indirectly from any use of the information contained in this document. Customer must contact Luminent to obtain the latest version of this publication to verify, before placing any order, that the information contained herein is current.

© Luminent, Inc. 2003
All rights reserved