



## 0.60mm (.024") Pitch DDR / DDR 2 SODIMM Connectors

### FEATURES AND SPECIFICATIONS

[查询"48212-0100"供应商](#)

**Molex's offers the complete range of SODIMM sockets solutions for the Notebook PC markets**


The demand for faster performing notebook PC has provided a major challenge to notebook PC system designers. High speed and long battery life becomes a must for power user on the road. To deliver a product that is both fast and efficient in power management, one of the few key considerations is the power consumption of the memory module/socket.

The 200 circuits DDR/DDR2 SODIMM socket provides such a solution for notebook PC designers. Due to its' small form factor, it enables notebook PC designer to use smaller chassis. This allows for the development of smaller and lighter notebook PC. Though both the DDR (2.5 volt) and DDR2 (1.8 volt) version of the SODIMM socket are almost identical, the differentiating factor is the location of the voltage key. This prevents the wrong type of memory module from mating with the socket. DDR2 is the next-generation DDR memory technology. It is faster, higher bandwidth, lower power consumption and better thermal management.

Molex is an active member of JEDEC work group which defines standards for the memory industry. The DDR/DDR2 SODIMM Socket accepts modules that meet the JEDEC MO-224 outline. It comes in Lead Free plating and is RoHS compliant.

**48212**  
**Reverse Mount**


**48213**  
**Standard Mount**

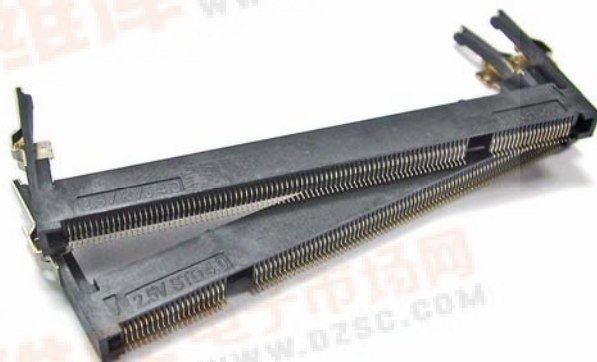

#### Features

#### Benefits

- |   |   |
|---|---|
| • Low profile   | • Provide 4.0mm & 5.2mm Height                                |
| • Standard & Reverse version  | • Flexible of PCB layout design                               |
| • Plastic latches with metal support constrain movements of the plastic latches | • User will not over bend the latch when they released module |
| • High Temperature Thermoplastic housing  | • Capable of lead free solder processing temperatures         |
| • Tape & Reel packing   | • For customer auto pick & place assembly process.            |

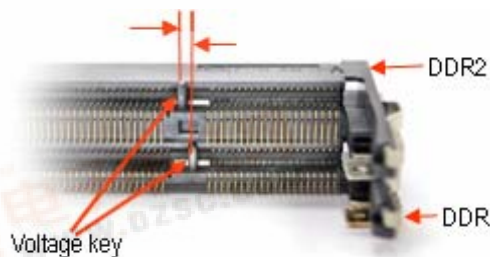

### SPECIFICATIONS

#### Reference Information

Packaging: Embossed Tape & Reel

UL File No.:

CSA File No.:

Mates With: JEDEC Standard Memory Modules

Designed In: mm

#### Electrical

Voltage: 50 AC

Current: 0.50A.

Contact Resistance: 30 milliohms max.

Dielectric Withstanding Voltage: 200V AC

Insulation Resistance: 100 Megohms min.

#### Mechanical

Contact retention force: 2.45N (0.55 lb)

Durability: 30 cycles

#### Physical

Housing: Liquid Crystal Polymer, Glass-filled)

Contact: Phosphor Bronze (Cu3Sn)

Plating:

Contact Area — 0.13 $\mu$ m (5  $\mu$ "") Gold (Au)

Solder Tail Area — Gold (Au) Flash.

Underplating — Nickel (Ni)

PCB Thickness: 1.6mm

Operating Temperature: -40°C to 85°C



**MARKETS AND APPLICATIONS**

[查询"48212-0100"供应商](#)



**0.60mm (.024") Pitch  
DDR / DDR 2 SODIMM  
Connectors**

**48212  
Reverse Mount**

**48213  
Standard Mount**

**Notebook Industry**

**ORDERING INFORMATION**

Description	Features		
	Lead-free Order No.	Mounted Height	Power Supply
0.60mm (.024") Pitch DDR SODIMM Socket, Right Angle, Reverse Mount, 200 Circuits	48212-0100	4.00mm (.157")	2.5V
	48212-0200	5.20mm (.205")	
0.60mm (.024") Pitch DDR2 SODIMM Socket, Right Angle, Reverse Mount, 200 Circuits	48212-1100	4.00mm (.157")	1.8V
	48212-1200	5.20mm (.205")	
0.60mm (.024") Pitch DDR SODIMM Socket, Right Angle, Standard Mount, 200 Circuits	48213-0100	4.00mm (.157")	2.5V
	48213-0200	5.20mm (.205")	
0.60mm (.024") Pitch DDR2 SODIMM Socket, Right Angle, Standard Mount, 200 Circuits	48213-1100	4.00mm (.157")	1.8V
	48213-1200	5.20mm (.205")	



**Americas Headquarters**  
2222 Wellington Ct.  
Lisle, Illinois 60532 USA  
1-800-78MOLEX  
amerinfo@molex.com

**Asia Pacific North Headquarters**  
Yamato, Kanagawa, Japan  
81-462-65-2324  
feninfo@molex.com

**Asia Pacific South Headquarters**  
Jurong, Singapore  
65-6-268-6868  
fesinfo@molex.com

**European Headquarters**  
Munich, Germany  
49-89-413092-0  
eurinfo@molex.com

**Corporate Headquarters**  
2222 Wellington Ct.  
Lisle, Illinois 60532 USA  
630-969-4550

Visit our Web site at <http://www.molex.com>