


# MODEL 66

3/8" Square  
查询"66WR100KLFTB"供应商

Multiturn  
Cermet Trimming  
Potentiometer

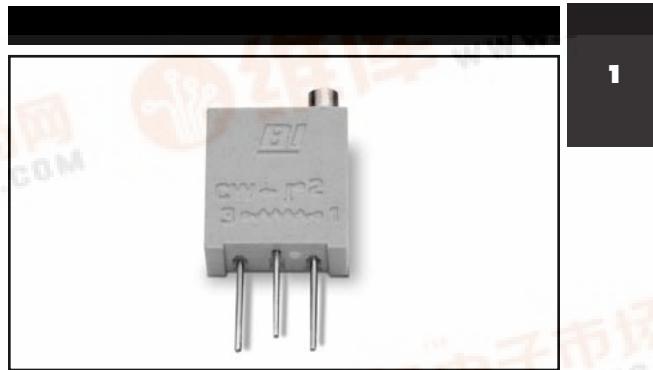

## ELECTRICAL

Standard Resistance Range, Ohms	10 to 2Meg
Standard Resistance Tolerance	$\pm 10\%$ ( $< 100$ Ohms = $\pm 20\%$ )
Input Voltage, Maximum	200 Vdc or rms not to exceed power rating
Slider Current, Maximum	100mA or within rated power, whichever is less
Power Rating, Watts	0.5 at 70°C derating to 0 at 125°C
End Resistance, Maximum	2 Ohms
Actual Electrical Travel, Turns, Nominal	20
Dielectric Strength	1,000 Vrms
Insulation Resistance, Minimum	1,000 Megohms
Resolution	Essentially infinite
Contact Resistance Variation, Maximum	1% or 1 Ohm, whichever is greater

## ENVIRONMENTAL

Seal	85°C Fluorinert® (No Leaks)
Temperature Coefficient, Maximum	$\pm 100$ ppm/°C
Operating Temperature Range	-65°C to +150°C
Thermal Shock	5 cycles, -65°C to +150°C (1% ΔRT, 1% ΔVR)
Moisture Resistance	Ten 24 hour cycles (1% ΔRT, IR 1,000 Megohms min.)
Shock, 6ms Sawtooth	100G's (1% ΔRT, 1% ΔVR)
Vibration	20G's, 10 to 2,000 Hz (1% ΔRT, 1% ΔVR)
High Temperature Exposure	250 hours at 125°C (2% ΔRT, 2% ΔVR)
Rotational Life	200 cycles (3% ΔRT)
Load Life at 0.5 Watts	1,000 hours at 70°C (2% ΔRT)
Resistance to Solder Heat	260°C for 10 sec. (1% ΔRT)

## MECHANICAL

Mechanical Stops	Clutch Action, both ends
Torque, Starting Maximum	5 oz.-in. (0.035 N-m)
Weight, Nominal	.04 oz. (1.13 grams)

Fluorinert® is a registered trademark of 3M Company.  
Specifications subject to change without notice.




1-39

Model 66

## TOP ADJUSTMENT (Inch/mm)


查询"66WR100KLFTB"供应商

Model 66W

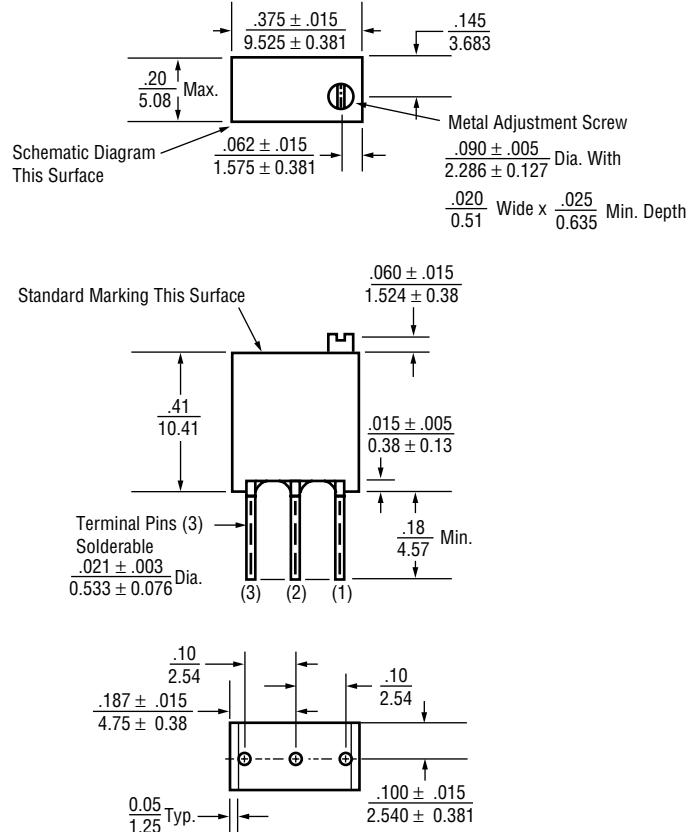

## SIDE ADJUSTMENT (Inch/mm)

Model 66P


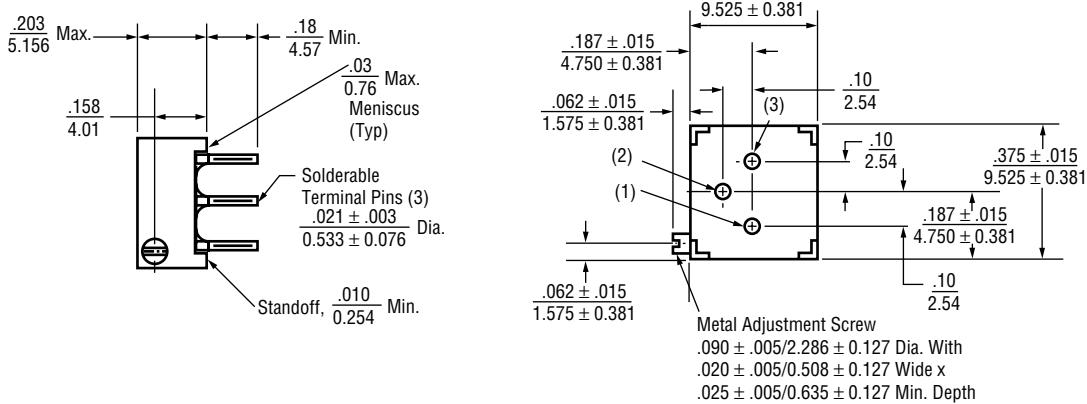


**SIDE ADJUSTMENT (Inch/mm)**

1

查询"66WR100KLFTB"供应商

Model 66X

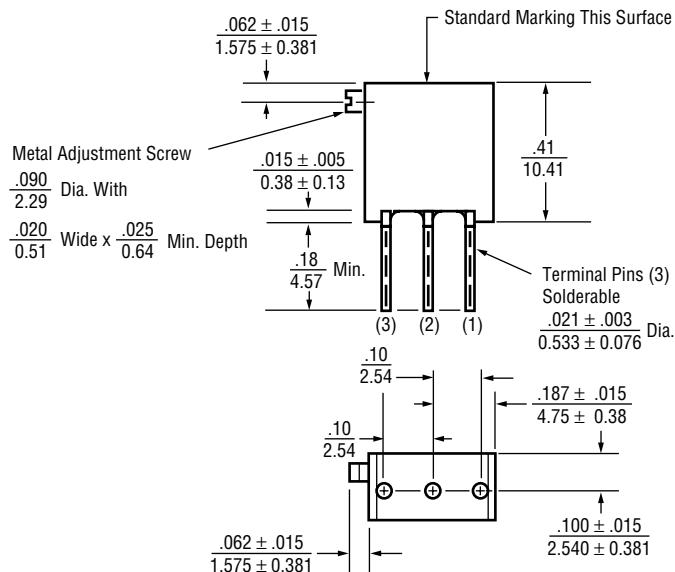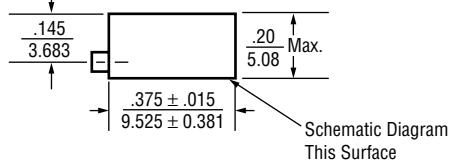**STANDARD RESISTANCE VALUES, OHMS**

10	200	5K	50K	500
20	500	10K	100K	1Meg
50	1K	20K	200K	2Meg
100	2K	25K	250K	

## 查询"66WR100KLFTB"供应商

**Standard:** Boxes

Capacity	=	100 Units (66W)
	=	50 Units (All other styles)

**Option:** Tubes

All units oriented with #1 pin to same side.

	<b>Pin Style</b>	<b>P</b>	<b>W</b>	<b>X</b>
Magazine	Width	=	0.57"	0.28"
	Height	=	0.66"	0.93"
	Length	=	20.9"	20.6" 24.4"
	Capacity	=	50 Units	50 Units 50 Units

**Option:** Tape & Reel, Ammo Pack (Available only for 66X and 66W)

All units oriented with #1 pin to the right of the direction of feed.

	Seat Plane to Centerline of Sprocket Hole	=	.71" (18 mm)
Tape	Width	=	18 mm
	Sprocket	=	Single Hole .50" spacing
	Capacity	=	1,000 Units
Reel	Diameter	=	14" (363 mm)
Ammo	Tape Fold	=	12" (305 mm)
	Box	=	1.8" x 13" x 10" (46mm x 330mm x 254mm)

## **ORDERING INFORMATION**

1

查询"66WR100KLFTB"供应商

### Standard:

The diagram illustrates a resistor component with the following labels:

- Model Series:** 66 P R 10K LF
- Pin Style:** (None)
- RoHS Compliant Product Code - Optional:** LF
- Resistance Value:** 10K
- Resistance Prefix:** P

### Option:

66 W R 10K LF TB  
Pin Style \_\_\_\_\_ Packaging Option:  
TB = Tubes  
(Pin styles P, W, X)

### Options:


Pin Style \_\_\_\_\_

Pin Style Suffix: \_\_\_\_\_

(Used with AP and TR packaging options.  
Applicable to pin styles W & X only.  
"F" designates 0.70" lead length.)

Packaging Option:  
AP = Ammo pack  
TR = Tape & Reel  
(Pin styles W, X only)

## CIRCUIT DIAGRAM

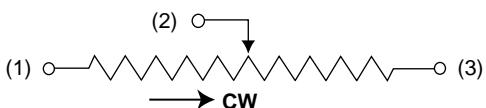

## NOTES

Metric equivalents, based on 1 inch = 25.4mm are rounded to the same number of significant figures as in the original English units and are provided for general information only.

Tolerances unless otherwise specified:  
Linear =  $\pm .01$  inches (.25mm)  
Angular =  $\pm 2$  degrees

