

查询"CTCDRH125E-151M"供应商

CTCDRH125 Series

From 1.3 μ H to 1,000 μ H

ENGINEERING KIT #23F



CHARACTERISTICS

Description: SMD (shielded) power inductor**Applications:** Power supplies for VTR, OA equipment, LCD televisions, PC notebooks, portable communication equipment, DC/DC converters, etc.**Operating Temperature:** -40°C to +100°C**Storage Temperature:** -40°C to +100°C**Inductance Tolerance:** +40%-20% , $\pm$ 20%**Testing:** Inductance is tested on an HP4284A at 1.0 kHz**Packaging:** Tape & Reel**Marking:** Parts are marked with inductance code**Miscellaneous:** RoHS Compliant available**Additional Information:** Additional electrical & physical information available upon request**Samples available. See website for ordering information.**

SPECIFICATIONS

Part numbers indicate tolerance available.

N = +40% -20% , M = $\pm$ 20%


CTCDRH125E Please specify "F" for RoHS Compliant

*IDC: The DC current at which the inductance decreases to 75% of its nominal value or when $\Delta T=40^{\circ}\text{C}$, whichever is lower ($T_a=20^{\circ}\text{C}$).

Part Number	Inductance (μ H)	L Test Freq. (kHz)	DCR Max. (Ω)	*IDC Max. (A)
CTCDRH125_-1R3N	1.3	1.0	.008	11.8
CTCDRH125_-2R1N	2.1	1.0	.011	9.8
CTCDRH125_-3R1N	3.1	1.0	.017	6.0
CTCDRH125_-4R4N	4.4	1.0	.020	5.0
CTCDRH125_-5R8N	5.8	1.0	.021	4.4
CTCDRH125_-7R5N	7.5	1.0	.024	4.2
CTCDRH125_-7R6N	7.6	1.0	.026	4.5
CTCDRH125_-100M	10	1.0	.03	4.0
CTCDRH125_-120M	12	1.0	.03	3.5
CTCDRH125_-150M	15	1.0	.03	3.3
CTCDRH125_-180M	18	1.0	.03	3.0
CTCDRH125_-220M	22	1.0	.04	2.8
CTCDRH125_-270M	27	1.0	.05	2.3
CTCDRH125_-330M	33	1.0	.06	2.1
CTCDRH125_-390M	39	1.0	.07	2.0
CTCDRH125_-470M	47	1.0	.08	1.8
CTCDRH125_-560M	56	1.0	.11	1.7
CTCDRH125_-680M	68	1.0	.12	1.5
CTCDRH125_-820M	82	1.0	.14	1.4
CTCDRH125_-101M	100	1.0	.16	1.3
CTCDRH125_-121M	120	1.0	.17	1.1
CTCDRH125_-151M	150	1.0	.23	1.0
CTCDRH125_-181M	180	1.0	.29	0.9
CTCDRH125_-221M	220	1.0	.40	0.8
CTCDRH125_-271M	270	1.0	.46	0.8
CTCDRH125_-331M	330	1.0	.51	0.7
CTCDRH125_-391M	390	1.0	.69	0.7
CTCDRH125_-471M	470	1.0	.77	0.6
CTCDRH125_-561M	560	1.0	.86	0.5
CTCDRH125_-681M	680	1.0	1.2	0.5
CTCDRH125_-821M	820	1.0	1.3	0.4
CTCDRH125_-102M	1000	1.0	1.5	0.4

PHYSICAL DIMENSIONS

Size	A Max.	B Max.	C	D
mm	12.8	6	7.6 $\pm$ 0.2	5 $\pm$ 0.2
inches	0.504	0.24	0.30 $\pm$ 0.008	0.2 $\pm$ 0.007

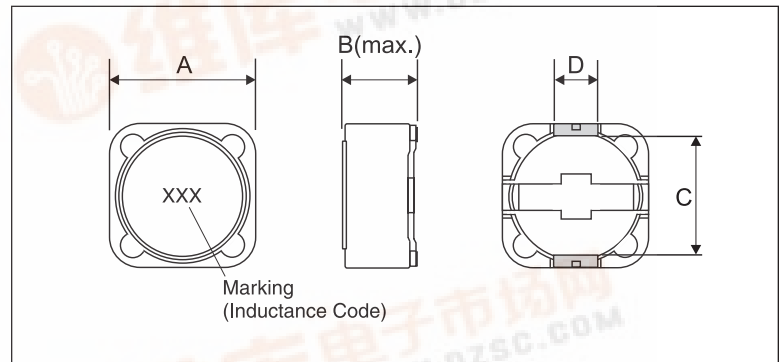

08.25.08

Manufacturer of Passive and Discrete Semiconductor Components

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2008 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice