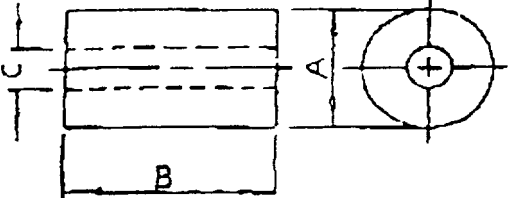


559 520

查询"33RH14.2X28.5X7"供应商

SPECIFICATION FOR APPROVAL

CUSTOMER : FARNELL				DATE : AMY 17, 1995			
PART NO. : 33RH 14.2X28.5X7 (559-520)				DWG. NO. : RH-049			
(1) MECHANICAL ASSEMBLY 				A	14.2±0.3	m/m	
				B	28.5±0.6	m/m	
				C	7.0±0.25	m/m	
				D		m/m	
				E		m/m	
				F		m/m	
				G		m/m	
				H		m/m	
				I		m/m	
				1ST COLOR		2ND COLOR	
(2) ELECTRICAL REQUIREMENTS				(3) SCHEMATIC			
TEST FREQUENCY	MHZ KHZ	L	UH mH				
TEST FREQUENCY	MHZ KHZ	C	PF				
		Q					
		SRF	MHZ				
		RDC	OHM				
		IDC	uA				
TEST FREQUENCY	25 MHZ	Z	130 ⁻⁰ OHM				
TEST FREQUENCY	100 MHZ	Z	210 ⁻⁰ OHM				
(4) TEST INSTRUMENTS							
HP 4191A RF IMPEDANCE ANALYZER.							
MAT'L	SPEC.			APPROVED BY			
CORE				[Signature]			
WIRE	0.8c T.C.W. X 220 m/m			CHECKED BY			
WINDING	1/2 TS.			[Signature]			
				DRAWN BY			
				[Signature]			

查询"33RH14.2X28.5X7"供应商

TEST DATA FOR PREPRODUCTION SAMPLES

CUSTOMER : FARNELL					DATE : MAY 17, 1995		
PART NO. : 33RH 14.2X28.5X7 (559-520)					DWG. NO. : RH-049		
	MEAS. ITEM	Z (OHM)	Z (OHM)	A μ/μ	B μ/μ	C μ/μ	D μ/μ
SPEC	YOUR						
	SUGGEST	130 ⁻⁰	210 ⁻⁰	14.2 $\pm$ 0.3	28.5 $\pm$ 0.6	7.0 $\pm$ 0.25	
TEST FREQ.		25 MHZ	100 MHZ				
	1	165	263	14.34	28.73	6.96	
	2	165	262	14.38	28.74	6.94	
	3	161	260	14.40	28.71	7.04	
	4	166	263	14.44	28.78	7.01	
	5	163	263	14.35	28.79	7.07	
	6						
	7						
	8						
	9						
	10						
	11						
	12						
	13						
	14						
	15						
	$\bar{X}$	164	262	14.38	28.75	7.00	
	R	5	3	0.10	0.08	0.10	
YOUR SAMPLE							
TEST CONDITION: TEMP. 23 °C R.H. 84 %							APPROVED BY
							CHECKED BY
							DRAWN BY