

PRODUCT SPECIFICATION

Model No : CSM-57261SG

Descriptions:

- 2.0Inch Dot-Matrix Display
- Dot Pitch 7.62mm
- 5*7 Array with X-Y Select.
- CSM-57261: Column Cathode, Row Anode
- Emitting Color: Super-Bright Red & Yellow Green



CUSTOMER APPROVED SIGNATURES	APPROVED BY	CHECKED BY	PREPARED BY

CHINA SEMICONDUCTOR CORPORATION

Address:2FL. NO.909,Chung-Cheng Road,
Chung-Ho City Taipei Hsien,Taiwan.

Tel:886-2-2223-9696

Fax:886-2-2223-9377

OPTO PLUS TECHNOLOGIES CO.,LTD

Address:696 Shun jiang Rd.,Ji Shan St.Shaoxing,
ZheJiang,China

Tel:86-0575-88623888

Fax:86-0575-88623112

Model No : CSM-57261SG


■ Features -

1. 2.0 inch (50.7mm) Matrix height.
2. Case mold type.
3. RoHs compliant.
4. Low power consumption.
5. Easy mounting on P.C. board or socket.

■ Device Selection Guide -

Part No.	Chip		Description	
	Material	Emitted Color	Column	Row
CSM-57261SG	AlGaAs	Super-Bright Red	Cathode	Anode
	GaP	Yellow-Green		

■ Package Dimensions -

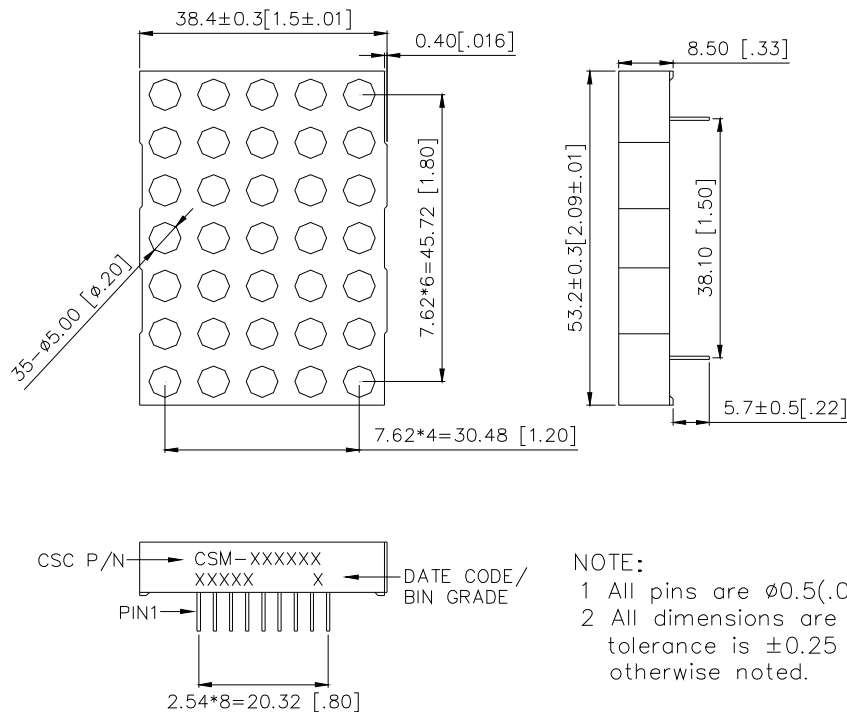


NOTE:

- 1 All pins are $\phi 0.5$ (.02).
- 2 All dimensions are in millimeters (inch), tolerance is ± 0.25 (.01) unless otherwise noted.

Model No : CSM-57261SG

Internal Circuit Diagrams -

CSM-57261

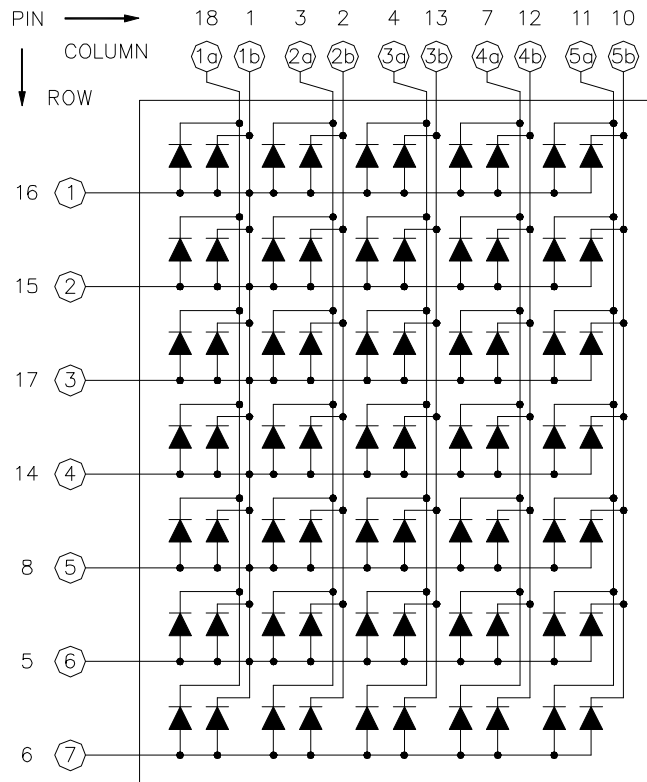

CSM-57261			
PIN NO.	FUNCTION	PIN NO.	FUNCTION
1	Cathode Column 1b	10	Cathode Column 5b
2	Cathode Column 2b	11	Cathode Column 5a
3	Cathode Column 2a	12	Cathode Column 4b
4	Cathode Column 2b	13	Cathode Column 3a
5	Anode Row 6	14	Anode Row 4
6	Anode Row 7	15	Anode Row 2
7	Cathode Column 4a	16	Anode Row 1
8	Anode Row 5	17	Anode Row 3
9	No Connect	18	Cathode Column 1a

NOTE: "a" for Orange-Red color chip
"b" for Yellow-Green color chip

Model No : CSM-57261SG

■ **Absolute Maximum Rating -**

Super Bright Red		(Ta=25℃)	
Parameter	Symbol	Rating	Unit
Power Dissipation Per Dice	P_{AD}	75	mW
Continuous Forward Current Per Dice	I_{AF}	30	mA
Peak Current Per Dice(duty cycle 1/10, 1kHz)	I_{PF}	120	mA
Derating Linear From 25℃ Per Dice	-	0.42	mA/℃
Reverse Voltage Per Dice	V_R	5	V
Operating Temp.	T_{opr}	-35 ~ +85	℃
Storage Temp.	T_{stg}	-35 ~ +85	℃
Solder temperature 1/16 inch below seating plane for 3 seconds at 260℃			

Yellow Green		(Ta=25℃)	
Parameter	Symbol	Rating	Unit
Power Dissipation Per Dice	P_{AD}	70	mW
Continuous Forward Current Per Dice	I_{AF}	25	mA
Peak Current Per Dice(duty cycle 1/10, 1kHz)	I_{PF}	90	mA
Derating Linear From 25℃ Per Dice	-	0.33	mA/℃
Reverse Voltage Per Dice	V_R	5	V
Operating Temp.	T_{opr}	-35 ~ +85	℃
Storage Temp.	T_{stg}	-35 ~ +85	℃
Solder temperature 1/16 inch below seating plane for 3 seconds at 260℃			

Model No : CSM-57261SG

■ Electro-optical Characteristics -

Super Bright Red		(Ta=25°C)				
Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward Voltage Per Segment	V _F	-	1.8	2.5	V	I _F =20mA
Luminous Intensity Per Segment	I _v	-	10	-	mcd	I _F =10mA
Peak Emission Wavelength	λ _p	-	660	-	nm	I _F =20mA
Dominant Wavelength	λ _d	-	644	-	nm	I _F =20mA
Spectrum Radiation Bandwidth	Δ λ	-	20	-	nm	I _F =20mA
Reverse Current	I _R	-	-	100	μA	V _R =5V
Luminous Intensity Matching Ratio	IV-m	-	-	2:1		I _p =80mA 1/16Duty

Yellow Green		(Ta=25°C)				
Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward Voltage Per Segment	V _F	-	2.1	2.8	V	I _F =20mA
Luminous Intensity Per Segment	I _v	-	8	-	mcd	I _F =10mA
Peak Emission Wavelength	λ _p	-	568	-	nm	I _F =20mA
Dominant Wavelength	λ _d	-	572	-	nm	I _F =20mA
Spectrum Radiation Bandwidth	Δ λ	-	30	-	nm	I _F =20mA
Reverse Current	I _R	-	-	100	μA	V _R =5V
Luminous Intensity Matching Ratio	IV-m	-	-	2:1	-	I _p =80mA 1/16Duty

Model No : CSM-57261SG

Typical Electrical / Optical Characteristics Curves -Super-Bright Red

(Ta = 25°C Unless Otherwise Noted)

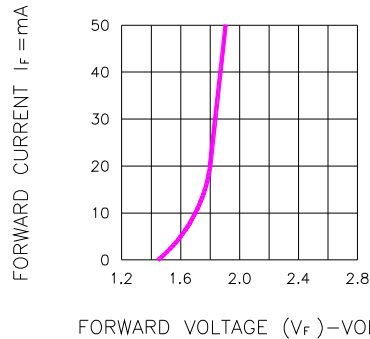


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

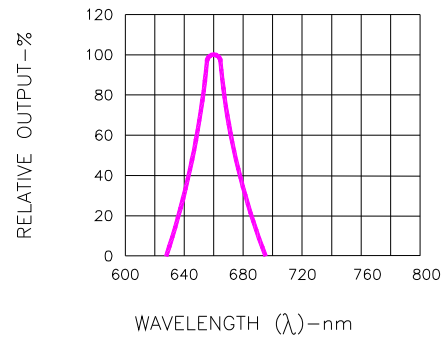


Fig.2 SPECTRAL RESPONSE

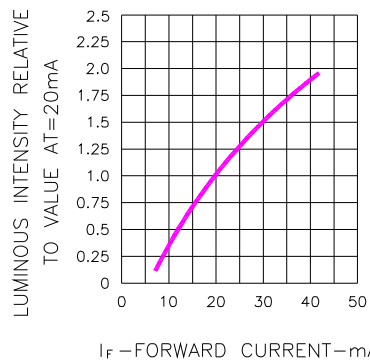


Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

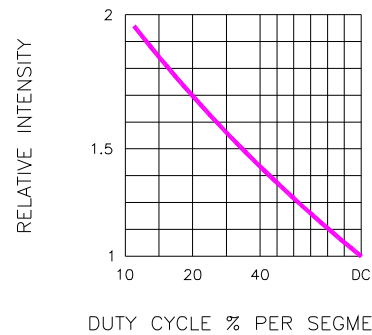


Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

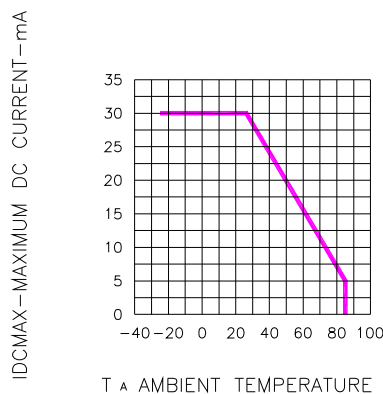


Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE

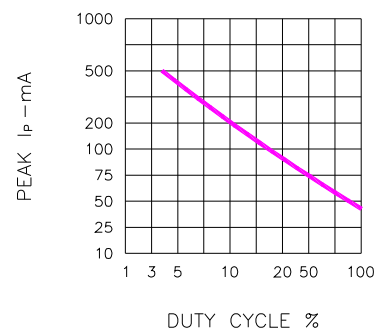


Fig.6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE f=1 KHz)

Model No : CSM-57261SG

Yellow Green

(Ta = 25°C Unless Otherwise Noted)

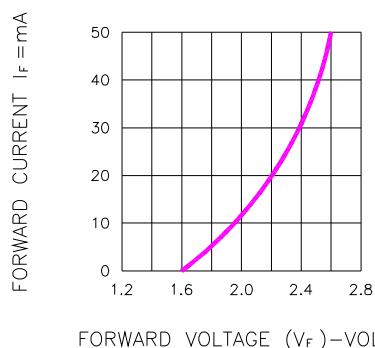


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

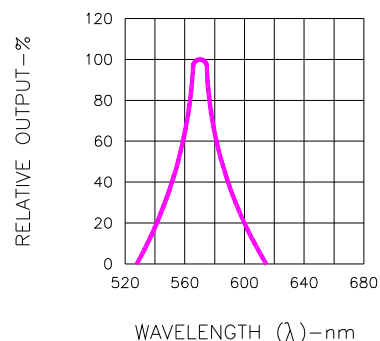


Fig.2 SPECTRAL RESPONSE

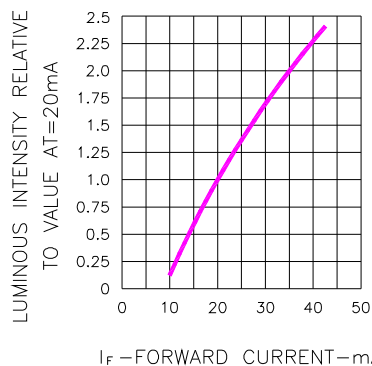


Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

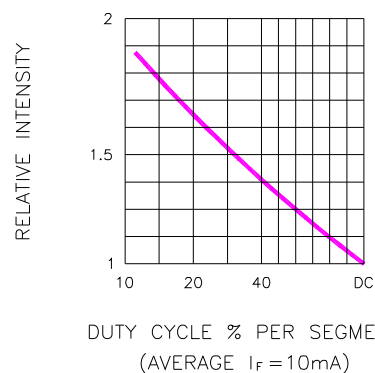


Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

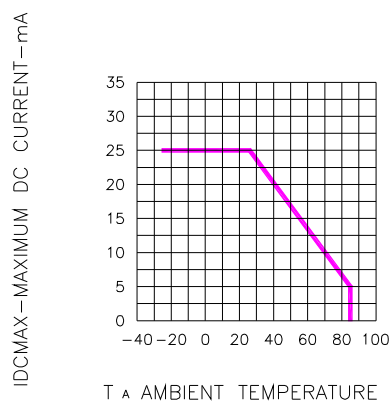


Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE

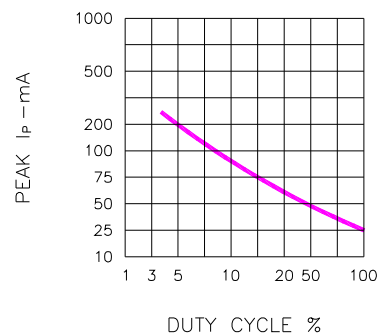



Fig.6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE f=1 KHz)



Spec. No.	PS-ND-0710
Rev.	A

Model No: CSM-57261SG

■ Package Dimensions

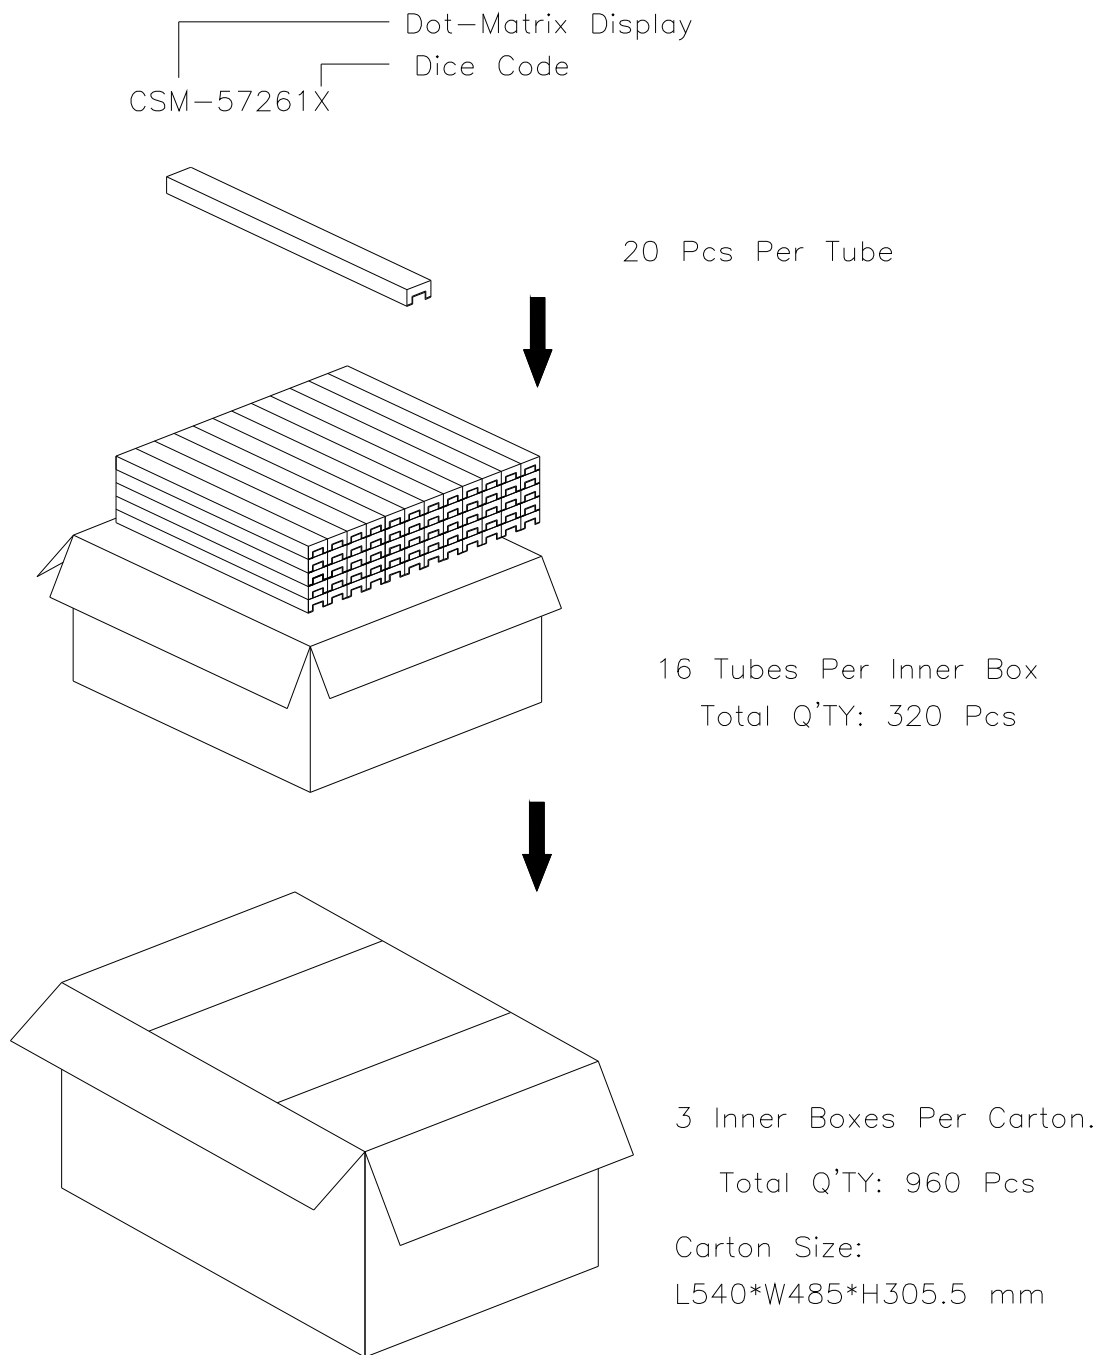

Note: The specifications are subject to change without notice. Please contact us for updated information.