

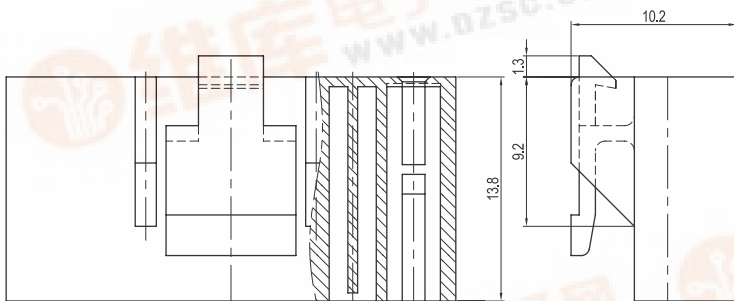
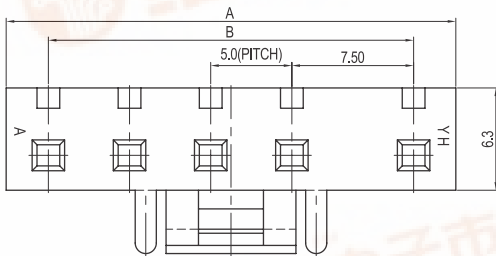


查询"50015HS"供应商


5.00mm (0.196") PITCH CONNECTOR

Wire-to-Board
Housing

50015HS Series

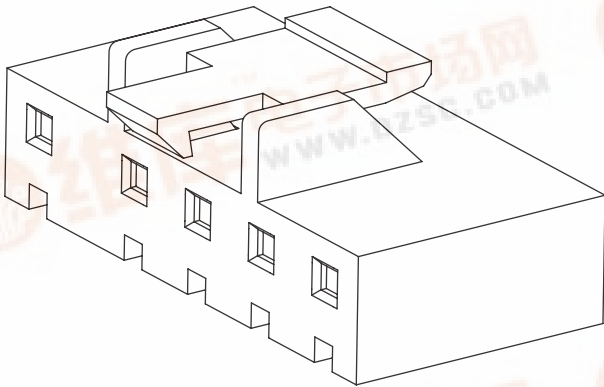

TERMINAL ASSEMBLY DRAWING



AWG : #16 ~ #24

Material

I/NO	DESCRIPTION	TITLE	MATERIAL
1	HOUSING	50015HS	PA66, UL94 V Grade

Available Pin

PARTS NO.	DIM. A	DIM. B
YHL500-02P	12.6	7.5
YHL500-03P	17.7	12.5
YHL500-04P	22.7	17.5
YHL500-05P	27.7	22.5
YHL500-06P	32.7	27.5

Specification

ITEM	SPEC
Voltage Rating	AC/DC 250V
Current Rating	AC/DC 5A
Operating Temperature	-25°C ~ +85°C
Contact Resistance	30mΩ MAX
Withstanding Voltage	AC1500V/1min
Insulation Resistance	1000MΩ MIN
Applicable Wire	AWG #16~#24
Applicable P.C.B	-
Applicable FPC/FFC	-
Solder Height	-
Crimp Tensile Strength	-
UL FILE NO	-

Application Terminal : YT396J (186 page)