

[查询"SGM3110"供应商](#)

SGM3110

MicroPower Regulated Charge Pump

GENERAL DESCRIPTION

The SGM3110 is a MicroPower switched capacitor voltage converter that delivers a regulated output. No external inductor is required for operation.

The SGM3110 can deliver up to 100mA to the voltage regulated output. It features very low quiescent current and high efficiency over a large portion of its load range, making this device ideal for battery-powered applications. Furthermore, the combination of few external components and small package size keeps the total converter board area to a minimum in space-restricted applications.

The SGM3110 uses a pulse skipping technique to provide a regulated output from a varying input supply. The SGM3110 contains a thermal management circuit to protect the device under continuous output short-circuit conditions.

The SGM3110 has lead (Pb) free SOT23-6 package and is rated over the -40°C to +85°C temperature range.


APPLICATIONS

Cellular Phones
Digital Cameras
Handheld Electronics
LED/Display Backlight Driver
LEDs for Camera Flash
Portable Communication Devices
MP3 Players
GPS Receivers
PDAs


FEATURES

- Step-Up Voltage Converter
- Input Voltage Range:
SGM3110-5.0: 2.7 to 5.0V
SGM3110-4.5: 2.7 to 4.5V
- MicroPower Consumption: 60 μ A
- Fixed 5V, 4.5V \pm 4% Output
- Peak Current 250mA for 100ms
- High Frequency 750kHz Operation
- Logic-Controlled Shutdown
- Short-Circuit/Over-Temperature Protection
- Lead (Pb) Free SOT23-6 Package

PIN CONFIGURATIONS (TOP VIEW)

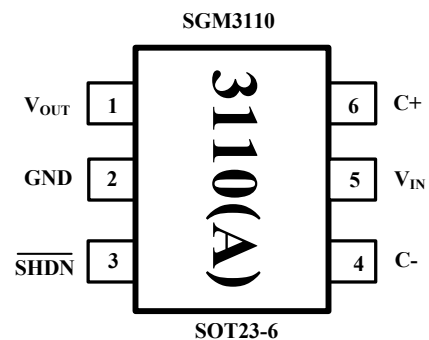

TYPICAL APPLICATION

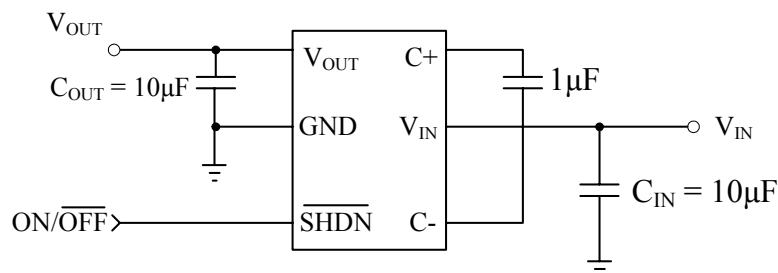

ELECTRICAL CHARACTERISTICS

($T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, unless otherwise noted. Typical values are at $T_A = 25^{\circ}\text{C}$, $C_{\text{FLY}} = 1\mu\text{F}$, $C_{\text{IN}} = 10\mu\text{F}$, $C_{\text{OUT}} = 10\mu\text{F}$).

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP ⁽¹⁾	MAX	UNITS
SGM3110-5.0						
Input Voltage Range	V_{IN}	$V_{\text{OUT}} = 5.0\text{V}$	2.7		V_{OUT}	V
Output Voltage	V_{OUT}	$2.7\text{V} < V_{\text{IN}} < 5\text{V}$, $I_{\text{OUT}} \leq 50\text{mA}$	4.8	5.0	5.2	V
		$3.0\text{V} < V_{\text{IN}} < 5\text{V}$, $I_{\text{OUT}} \leq 100\text{mA}$	4.8	5.0	5.2	
Quiescent Power Supply Current	I_{Q}	$2.7\text{V} < V_{\text{IN}} < 5\text{V}$, $I_{\text{OUT}} = 0\text{mA}$, $\overline{\text{SHDN}} = V_{\text{IN}}$		60	68	μA
Shutdown Supply Current	I_{SHDN}	$2.7\text{V} < V_{\text{IN}} < 3.6\text{V}$, $I_{\text{OUT}} = 0\text{mA}$, $V_{\text{SHDN}} = 0$		0.2	1	μA
		$3.6\text{V} < V_{\text{IN}} < 5\text{V}$, $I_{\text{OUT}} = 0\text{mA}$, $V_{\text{SHDN}} = 0$			1	
Ripple Voltage	V_{RIPPLE}	$V_{\text{IN}} = 2.7\text{V}$, $I_{\text{OUT}} = 50\text{mA}$		15		$\text{mV}_{\text{P-P}}$
		$V_{\text{IN}} = 3\text{V}$, $I_{\text{OUT}} = 100\text{mA}$		88		
Efficiency	η	$V_{\text{IN}} = 2.7\text{V}$, $I_{\text{OUT}} = 50\text{mA}$		91		%
Frequency	f_{OSC}	Oscillator Free Running		750		kHz
$\overline{\text{SHDN}}$ Input Threshold High	V_{IH}		1.4			V
$\overline{\text{SHDN}}$ Input Threshold Low	V_{IL}				0.4	
$\overline{\text{SHDN}}$ Input High Current	I_{IH}	$\overline{\text{SHDN}} = V_{\text{IN}}$	-1		+1	μA
$\overline{\text{SHDN}}$ Input Low Current	I_{IL}	$\overline{\text{SHDN}} = \text{GND}$	-1		+1	μA
Turn-On Time	T_{ON}	$V_{\text{IN}} = 3\text{V}$, $I_{\text{OUT}} = 0\text{mA}$		0.3		ms
SGM3110-4.5						
Input Voltage Range	V_{IN}	$V_{\text{OUT}} = 4.5\text{V}$	2.7		V_{OUT}	V
Output Voltage	V_{OUT}	$2.7\text{V} < V_{\text{IN}} < 4.5\text{V}$, $I_{\text{OUT}} \leq 50\text{mA}$	4.32	4.5	4.68	V
		$3.0\text{V} < V_{\text{IN}} < 4.5\text{V}$, $I_{\text{OUT}} \leq 100\text{mA}$	4.32	4.5	4.68	
Quiescent Power Supply Current	I_{Q}	$2.7\text{V} < V_{\text{IN}} < 4.5\text{V}$, $I_{\text{OUT}} = 0\text{mA}$, $\overline{\text{SHDN}} = V_{\text{IN}}$		60	68	μA
Shutdown Supply Current	I_{SHDN}	$2.7\text{V} < V_{\text{IN}} < 3.6\text{V}$, $I_{\text{OUT}} = 0\text{mA}$, $V_{\text{SHDN}} = 0$		0.2	1	μA
		$3.6\text{V} < V_{\text{IN}} < 4.5\text{V}$, $I_{\text{OUT}} = 0\text{mA}$, $V_{\text{SHDN}} = 0$			1	
Ripple Voltage	V_{RIPPLE}	$V_{\text{IN}} = 2.7\text{V}$, $I_{\text{OUT}} = 50\text{mA}$		15		$\text{mV}_{\text{P-P}}$
		$V_{\text{IN}} = 3\text{V}$, $I_{\text{OUT}} = 100\text{mA}$		88		
Efficiency	η	$V_{\text{IN}} = 2.7\text{V}$, $I_{\text{OUT}} = 50\text{mA}$		83		%
Frequency	f_{OSC}	Oscillator Free Running		750		kHz
$\overline{\text{SHDN}}$ Input Threshold High	V_{IH}		1.4			V
$\overline{\text{SHDN}}$ Input Threshold Low	V_{IL}				0.4	
$\overline{\text{SHDN}}$ Input High Current	I_{IH}	$\overline{\text{SHDN}} = V_{\text{IN}}$	-1		+1	μA
$\overline{\text{SHDN}}$ Input Low Current	I_{IL}	$\overline{\text{SHDN}} = \text{GND}$	-1		+1	μA
Turn-On Time	T_{ON}	$V_{\text{IN}} = 3\text{V}$, $I_{\text{OUT}} = 0\text{mA}$		0.3		ms

Specifications subject to change without notice.

[查询"SGM3110"供应商](#) **PACKAGE/ORDERING INFORMATION**

ORDER NUMBER	PACKAGE DESCRIPTION	PACKAGE OPTION	MARKING INFORMATION
SGM3110-5.0YN6/TR	SOT23-6	Tape and Reel, 3000	3110
SGM3110-4.5YN6/TR	SOT23-6	Tape and Reel, 3000	3110A

ABSOLUTE MAXIMUM RATINGS

V_{IN} to GND-0.3V to 6 V
 V_{OUT} to GND-0.3V to 6 V
 \overline{SHDN} to GND-0.3V to 6 V
 Storage Temperature Range..... -65°C to +150°C
 Junction Temperature160°C
 Operating Temperature Range -40°C to +85°C
 Power Dissipation, P_D @ $T_A = 25^\circ\text{C}$
 SOT23-60.34W
 Package Thermal Resistance
 SOT23-6, θ_{JA} 250°C/W
 Lead Temperature Range (Soldering 10 sec)
 260°C
 ESD Susceptibility
 HBM.....2000V
 MM.....400V

CAUTION

This integrated circuit can be damaged by ESD. Shengbang Micro-electronics recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

NOTES

1. Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


PIN DESCRIPTION

NAME	FUNCTION
V_{OUT}	Regulated output pin.
GND	Ground
\overline{SHDN}	Shutdown input. Logic low signal disables the converter.
C-	Flying capacitor negative terminal.
V_{IN}	Input supply pin.
C+	Flying capacitor positive terminal.


TYPICAL PERFORMANCE CHARACTERISTICS

At $V_S = +5.0V$, $T_A = +25^\circ C$, $V_{IN} = 3V$, $C_{IN} = C_{OUT} = 10\mu F$, $C_{FLY} = 1\mu F$, unless otherwise noted.


Startup Time with 50mA Load

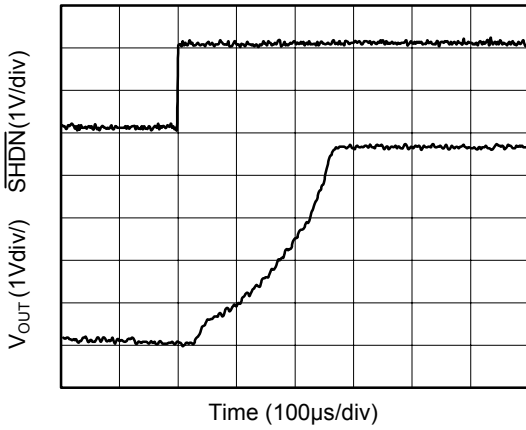


Startup Time with 100mA Load

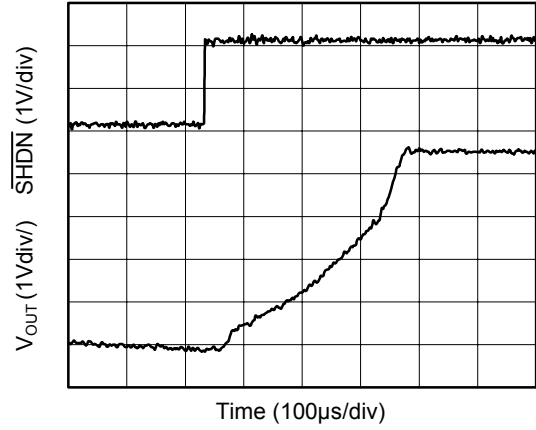


Output Ripple with $I_{OUT} = 50mA$

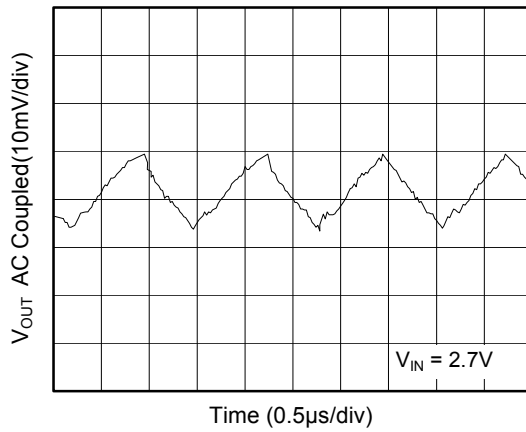


Output Ripple with $I_{OUT} = 100mA$

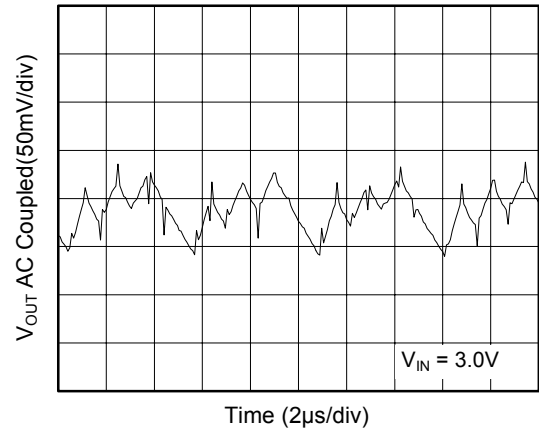

Load Transient Response for 50mA






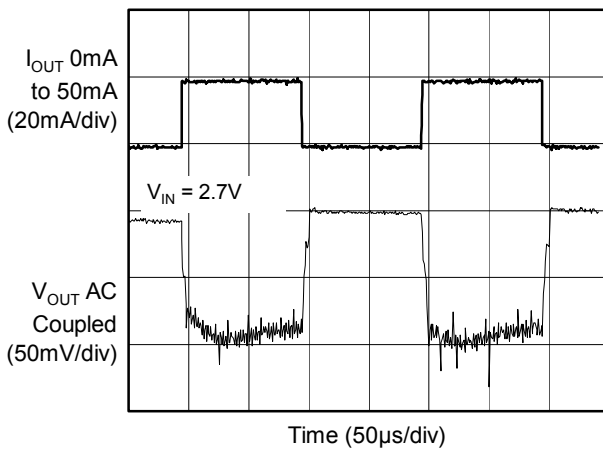


Load Transient Response for 100mA

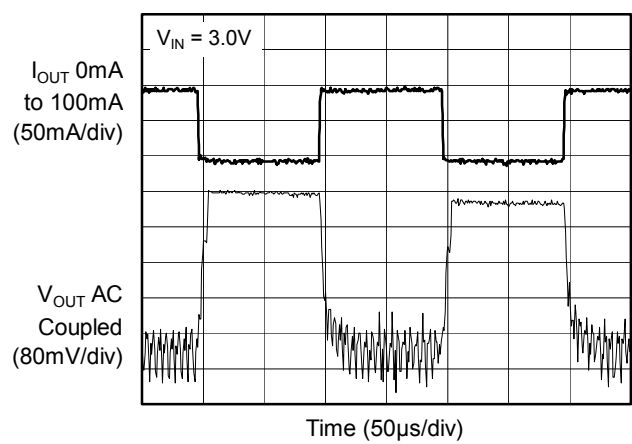




TYPICAL PERFORMANCE CHARACTERISTICS

At $V_S = +5.0V$, $T_A = +25^\circ C$, $V_{IN} = 3V$, $C_{IN} = C_{OUT} = 10\mu F$, $C_{FLY} = 1\mu F$, unless otherwise noted.

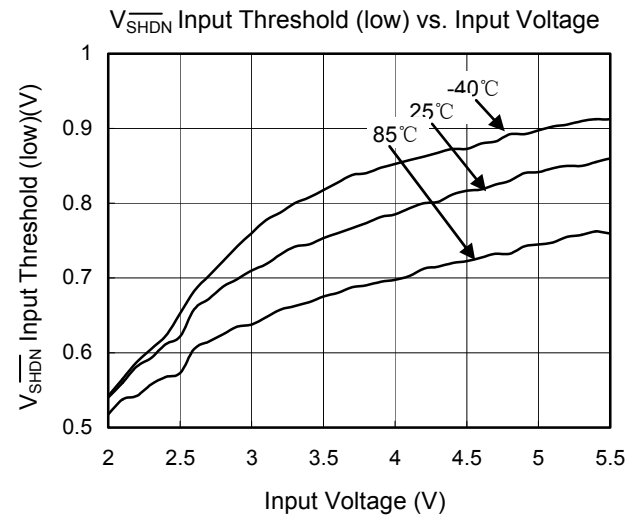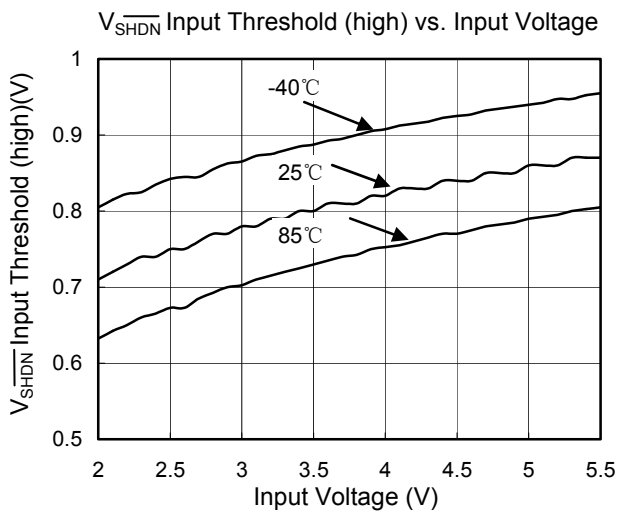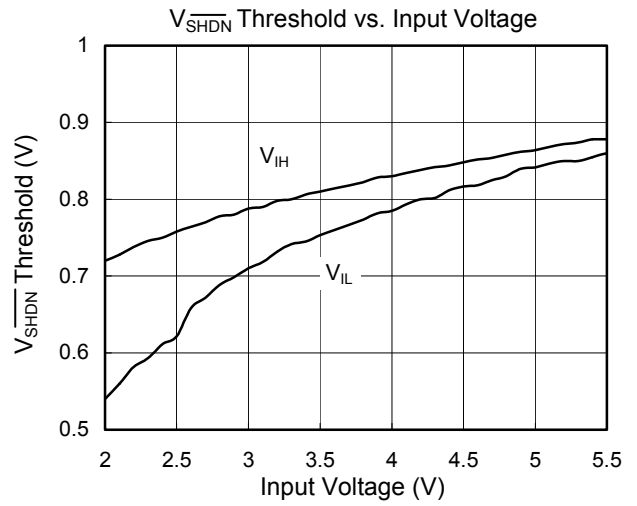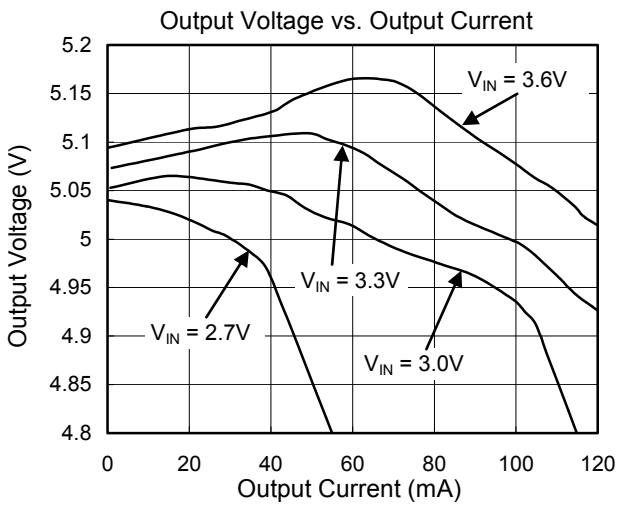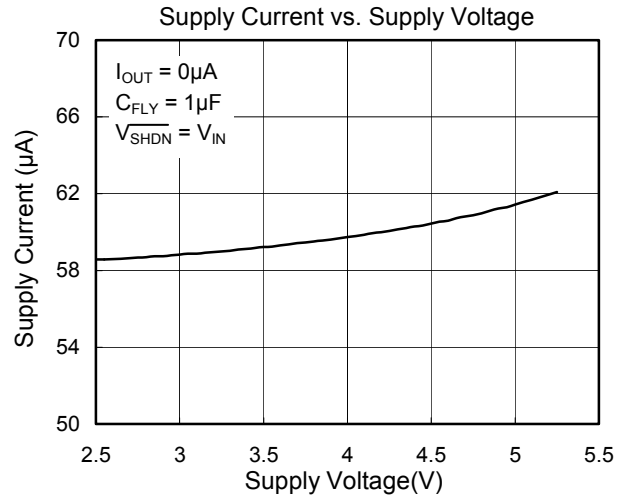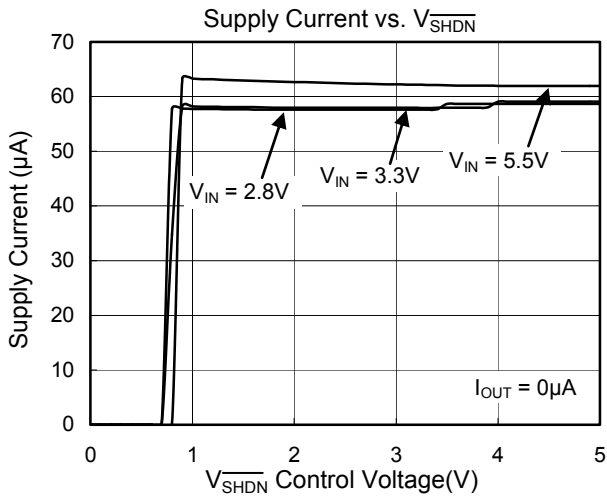


TYPICAL PERFORMANCE CHARACTERISTICS

At $V_S = +5.0V$, $T_A = +25^\circ C$, $V_{IN} = 3V$, $C_{IN} = C_{OUT} = 10\mu F$, $C_{FLY} = 1\mu F$, unless otherwise noted.

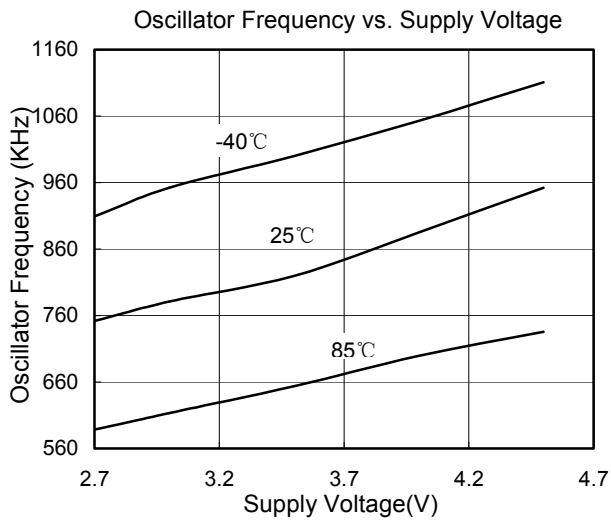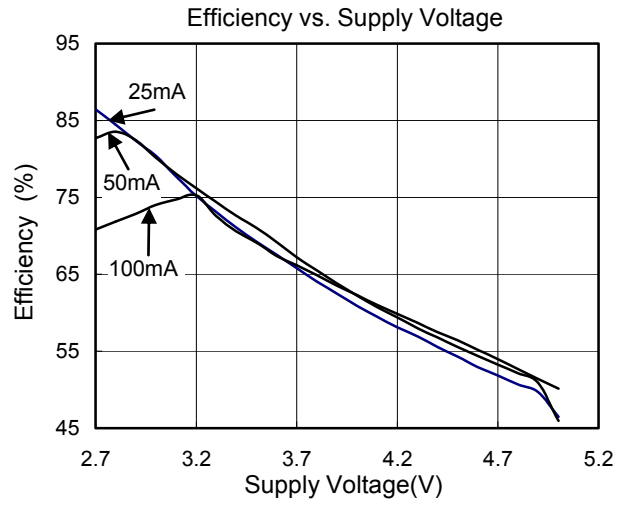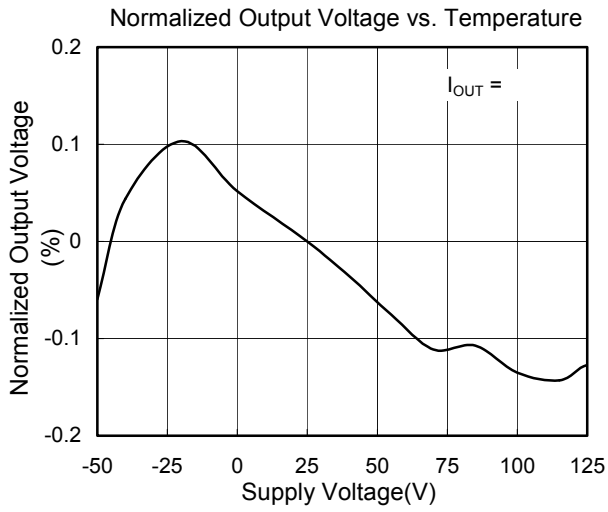

PACKAGE OUTLINE DIMENSIONS

SOT23-6

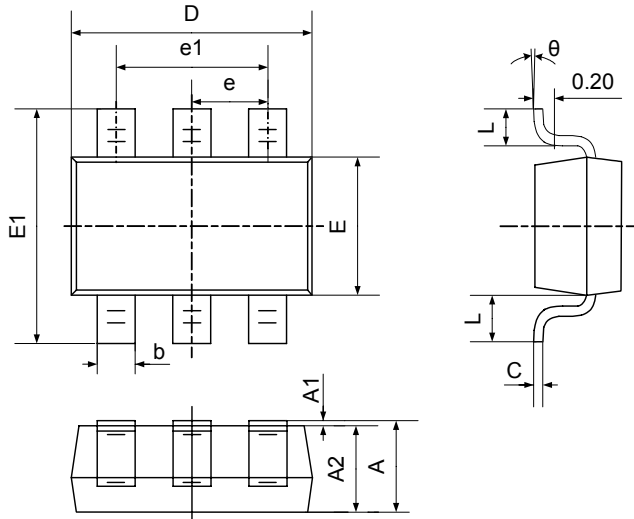

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.400	0.012	0.016
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.700REF		0.028REF	
L1	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°