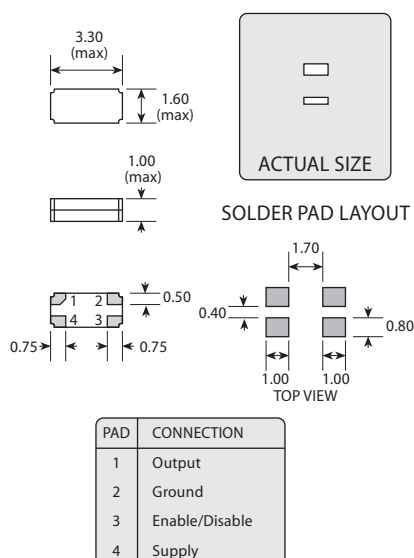
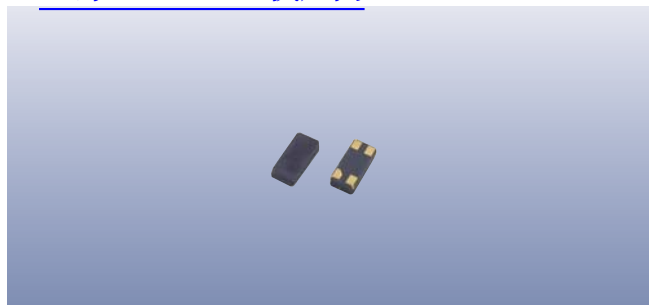


[查询"OV7604C7"供应商](#)

Specifications


Parameters	Product OV7604C7	Option Codes
Frequency:	32.7680kHz	■
Calibration tolerance: ($V_{DD} = 3.0V$)	±10ppm □ ±20ppm ■ Other □	A B specify
Turnover temperature (T_0):	+25°C ±5°C	■
Frequency / temp coefficient:	-0.035ppm/°C² ±10%	■
Operating temperature range:	-40 to +85°C -55 to +125°C	■ □ M
Storage temperature range:	-55 to +125°C	■
Supply voltage (V_{DD}):	Operable from 1.2 ~ 5.5V	■
Supply current (backup mode):	0.3µA typ, 0.5µA max ($V_{DD} = 3.0V$, output disabled)	■
Logic levels:	'0' level = 0.4V max '1' level = $V_{DD} - 0.4V$ min	■ ■
Waveform symmetry:	40:60 max @ 50% V_{DD}	■
Driving ability:	15pF HCMOS	■
Voltage coefficient:	±1.5ppm/V max	■
Rise / fall time:	70ns max	■
Start up time:	500ms max @ 25°C	■
Enable / disable function:	Control via pad 3	■
Ageing:	±3ppm max first year @ 25°C	■
Shock and vibration resistance:	±5ppm, 5,000g, 0.3ms, sine ±5ppm, 20g, 10.0 ~ 2,000Hz	■ ■
Soldering condition:	Reflow, 260°C, 20 sec max	■

■ Standard. □ Optional - Please specify required code(s) when ordering

Features

- Very low power consumption
- Tight frequency tolerance
- Industrial and extended temperature ranges
- High shock and vibration resistance
- World's smallest LF oscillator

Block Diagram



Ordering Information

Product + option code

eg: **OV7604C7/B** ±20ppm (standard)

Option code X (eg OV7604C7/X) denotes a custom spec.

- ◆ Available on T&R - 3k, 7k or 14k pcs per reel.
- ◆ Refer to our website for T&R and soldering details.

Enable / Disable Function

Input (pad 3)	Output (pad 1)
'1' level	Enabled
'0' level	Disabled

Note: Pad 3 should not be allowed to float.