


Small Signal Schottky Diodes

Features

- For surface mounted applications
- Low-profile package
- Ideal for automated placement
- Low power loss, high efficiency
- High temperature soldering: 260 °C/10 s at terminals
- Wave and reflow solderable
- AEC-Q101 qualified
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition



RoHS
 COMPLIANT
 HALOGEN
FREE



17249

Mechanical Data

Case: DO-219AB (SMF)

Polarity: color band denotes cathode end

Weight: approx. 15 mg

Packaging codes/options:

18/10 k per 13" reel (8 mm tape), 50 k/box

08/3 k per 7" reel (8 mm tape), 30 k/box

Parts Table

Part	Ordering code	Marking	Remarks
SL02-M	SL02-M-18 or SL02-M-08	U2	Tape and reel
SL03-M	SL03-M-18 or SL03-M-08	U3	Tape and reel
SL04-M	SL04-M-18 or SL04-M-08	U4	Tape and reel

Absolute Maximum Ratings

T_{amb} = 25 °C, unless otherwise specified

Parameter	Test condition	Part	Symbol	Value	Unit
Maximum repetitive peak reverse voltage		SL02-M	V _{RRM}	20	V
		SL03-M	V _{RRM}	30	V
		SL04-M	V _{RRM}	40	V
Maximum RMS voltage		SL02-M	V _{RMS}	14	V
		SL03-M	V _{RMS}	21	V
		SL04-M	V _{RMS}	28	V



SL02-M, SL03-M, SL04-M



Vishay Semiconductors

Parameter	Test condition	Part	Symbol	Value	Unit
Maximum DC blocking voltage		SL02-M	V_{DC}	20	V
		SL03-M	V_{DC}	30	V
		SL04-M	V_{DC}	40	V
Maximum average forward rectified current	$T_{tp} = 109\text{ }^{\circ}\text{C}$		$I_{F(AV)}$	1.1	A
Peak forward surge current 8.3 ms single half sine-wave			I_{FSM}	40	A

Thermal Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Thermal resistance junction to ambient air ¹⁾		R_{thJA}	180	K/W
Maximum operating junction temperature		T_j	125	$^{\circ}\text{C}$
Storage temperature range		T_{stg}	- 55 to 150	$^{\circ}\text{C}$

Note:

¹⁾ Mounted on epoxy substrate with 3 mm x 3 mm Cu pads ($\geq 40\text{ }\mu\text{m}$ thick)

Electrical Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Test condition	Part	Symbol	Min	Typ.	Max	Unit
Instaneous forward voltage	$I_F = 0.5\text{ A}$ ¹⁾	SL02-M	V_F		0.360	0.385	V
		SL03-M	V_F		0.395	0.43	V
		SL04-M	V_F		0.450	0.51	V
Typical instantaneous forward voltage	$I_F = 1.1\text{ A}$	SL02-M	V_F		0.420		V
		SL03-M	V_F		0.450		V
		SL04-M	V_F		0.530		V
Maximum DC reverse current at rated DC blocking voltage	$T_A = 25\text{ }^{\circ}\text{C}$	SL02-M	I_R			250	μA
	$T_A = 100\text{ }^{\circ}\text{C}$	SL02-M	I_R			8	mA
	$T_A = 25\text{ }^{\circ}\text{C}$	SL03-M	I_R			130	μA
	$T_A = 100\text{ }^{\circ}\text{C}$	SL03-M	I_R			6	mA
	$T_A = 25\text{ }^{\circ}\text{C}$	SL04-M	I_R			20	μA
	$T_A = 100\text{ }^{\circ}\text{C}$	SL04-M	I_R			6	mA

Note:

¹⁾ Pulse test: 300 μs pulse width, 1 % duty cycle

Typical Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

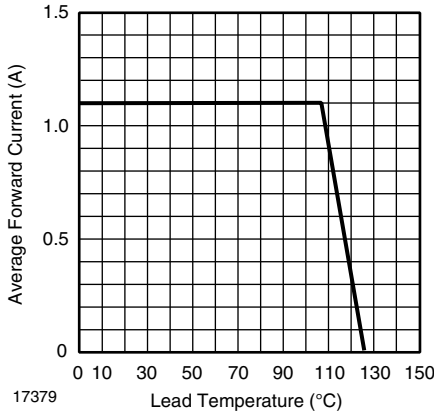


Figure 1. Forward Current Derating Curve

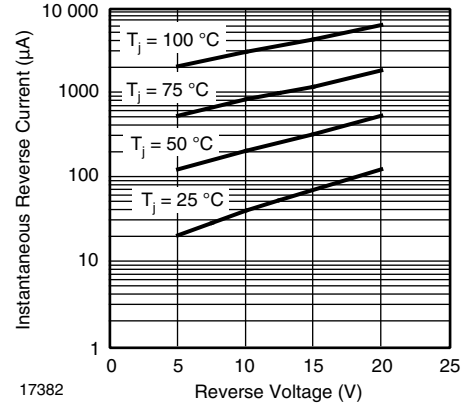


Figure 4. Typical Reverse Current Characteristics - SL02

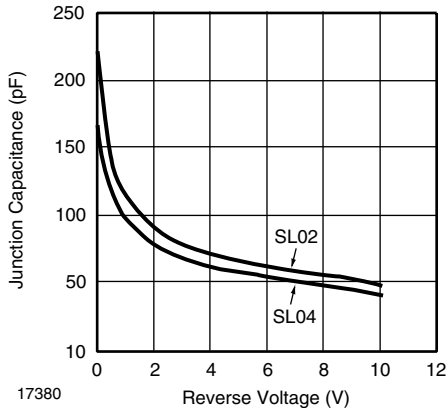


Figure 2. Typical Junction Capacitance

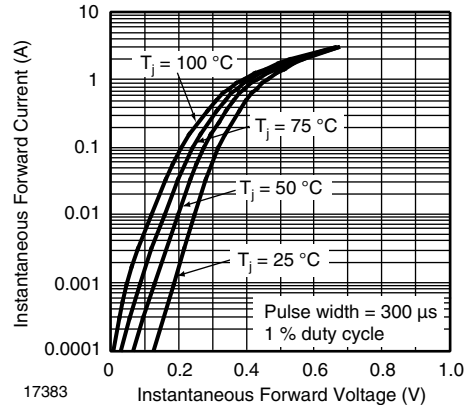


Figure 5. Typical Instantaneous Forward Characteristics - SL03

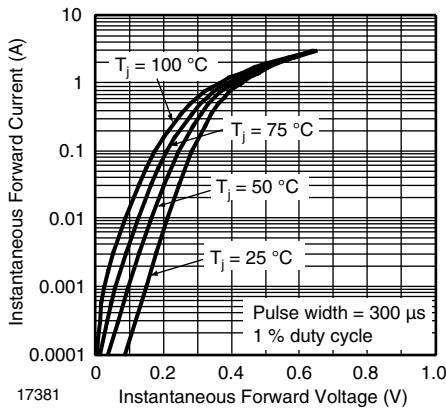


Figure 3. Typical Instantaneous Forward Characteristics - SL02

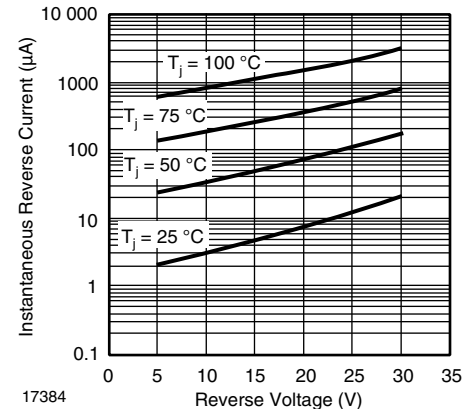



Figure 6. Typical Reverse Current Characteristics - SL03

SL02-M, SL03-M, SL04-M




上海VISHAY半导体有限公司
Vishay Semiconductors

Package Dimensions in millimeters (inches): DO-219AB

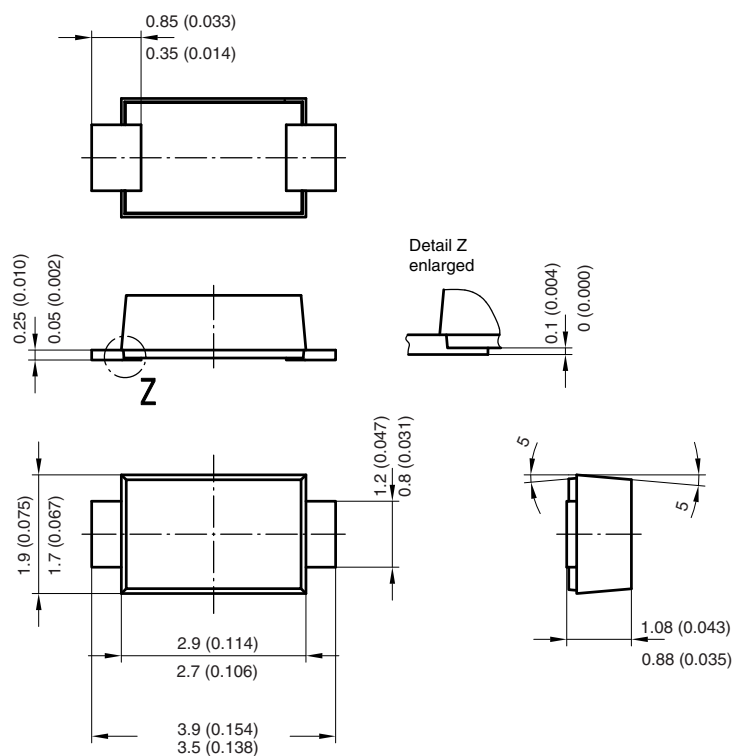


Foot print recommendation:

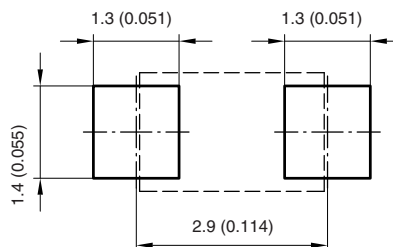

Created - Date: 15. February 2005
Rev. 3 - Date: 13. March 2007
Document no.:S8-V-3915.01-001 (4)
17247

Blisertape Dimensions for SMF in millimeters

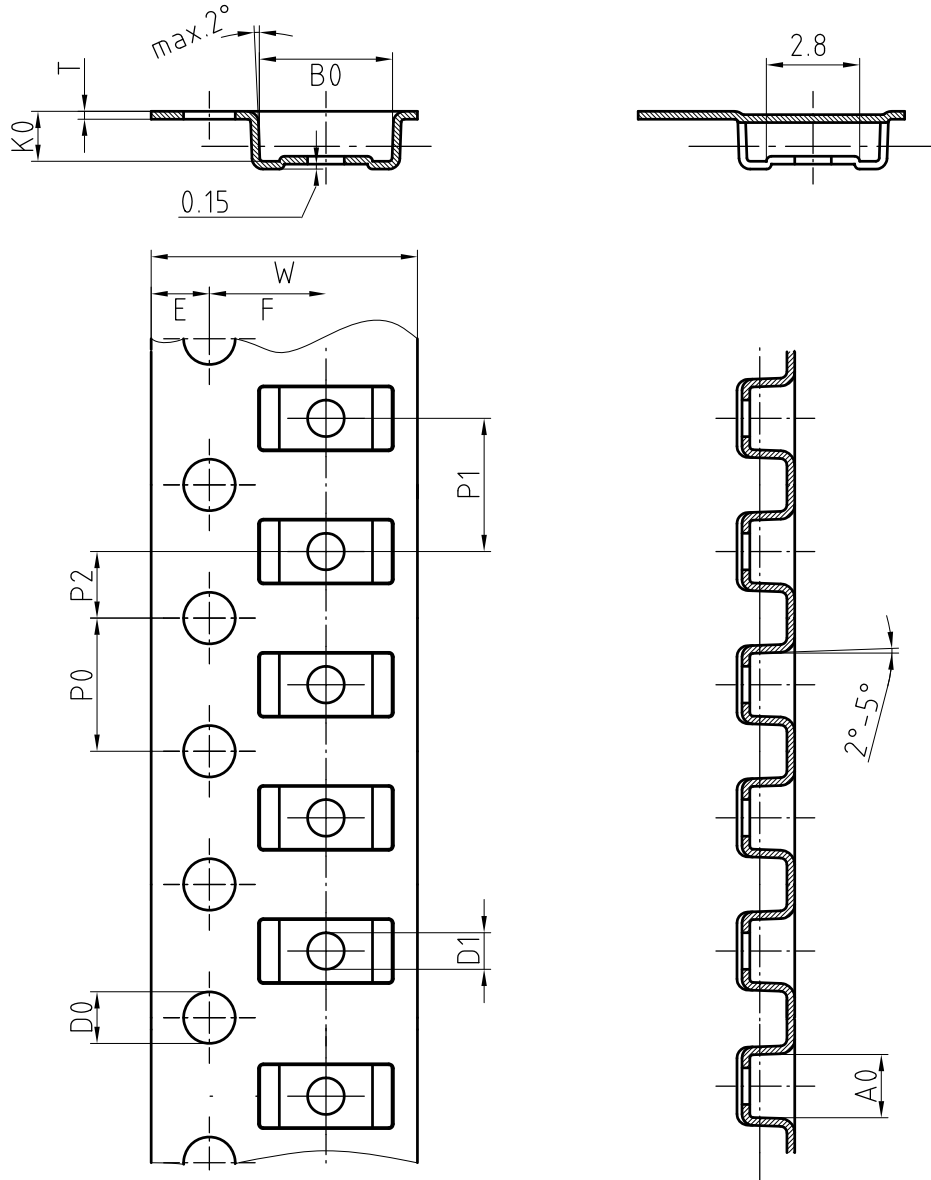

Mat:	A0	B0	K0	W	T	P0	P2	P1	D0	D1	E	F
PS	1.9	4.0	1.5	8.0	0.235	4.0	2.0	4.0	1.5	1	1.75	3.5

Document-No.: S8-V-3717.02-001 (3)

18513

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.