

AC Filter, Broad Band Attenuation

[查询"5500.2064"供应商](#)**Description**

- Chassis:
Screw-on mounting, from top
- Line-filter in standard version, 1-stage, high attenuation
- Very high symmetrical and asymmetrical attenuation loss in the frequency range from 10kHz up to 30MHz

Approvals

- VDE License Number: 40004673
- UL License Number: E72928

Characteristics

- Designed for high current applications
- High attenuation at maximum resp. asymmetric load independent from the line impedance
- Especially designed for industrial applications such as: Frequency Converters, Stepper Motor Drives, UPS-Systems, Inverters
- Qualified for use in equipment according IEC/EN 60950

References[General Product Information](#)**Weblinks**

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [Distributor-Stock-Check](#), [Accessories](#)

Technical Data


Ratings IEC	12 - 30 A @ Ta 40 °C / 250 VAC; 50 Hz
Ratings UL/CSA	12 - 30 A @ Ta 40 °C / 125 VAC; 60 Hz
Leakage Current	industrial < 5.2 mA (250 V / 60 Hz)
Dielectric Strength	> 1.7 kVDC between L-N > 2.7 kVDC between L/N-PE Test voltage (2 sec)
Allowable Operation Temp.	-25 °C to 100 °C
Climatic Category	25/100/21 acc. to IEC 60068-1
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140
Terminal	Screw
Material: Housing	Metal

Line Filter	Industrial Version, IEC 60939, IEC 60601-1, UL 1283, UL 544, EN 133 200, CSA C22.2 no. 8 Technical details
MTBF	> 200'000h acc. to MIL-HB-217 F

Dimensions

Case 24-2


Case 24-6

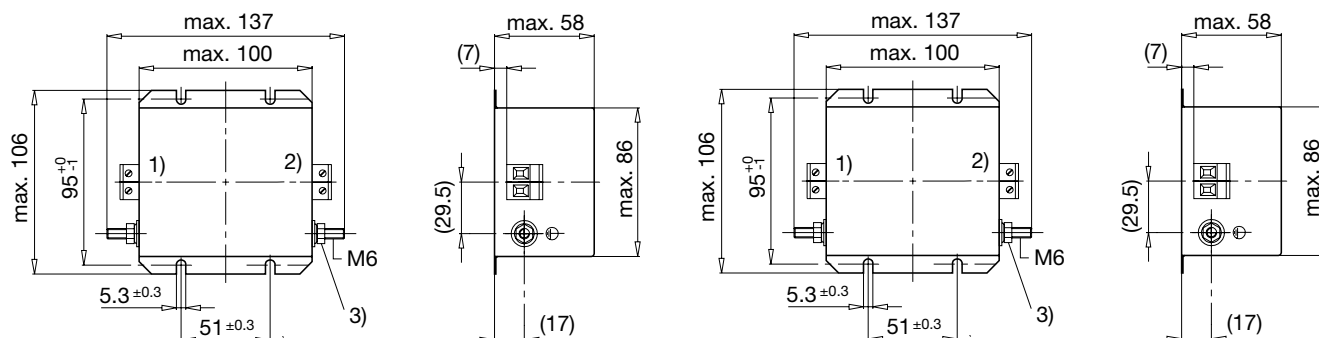

1) Line2) Load3) Nut torque 3...4 Nm.

[查询"5500.2064"供应商](#)
Diagrams

Standard version



- 1) Line
- 2) Load


Attenuation Loss

--- differential mode ____ common mode

Industrial Version
12 A

20 A

30 A

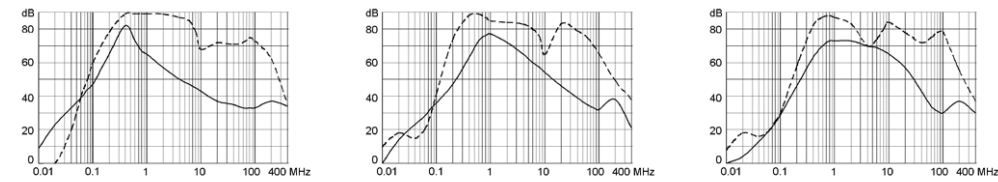

Variants

Rated Current [A]	Filter-Type	Leakage Current [mA]	L [mH]	C1 (X2)	C2 (Y2) [nF]	C3 (Y2)	C4 (X2)	R [MΩ]	Clamps [mm²]	Weight [g]	Housing	Order Number
12	Industrial Version	5.2	2 x 10	2.2	10	47	1	1	4	927	24-2	5500.2064
20	Industrial Version	5.2	2 x 3.5	2.2	10	47	1	1	4	930	24-2	5500.2065
30	Industrial Version	5.6	2 x 1.5	2.2	15	47	1	1	6	970	YB2	5500.2066

Packaging unit 2 Pcs