


Adjustable Type Coils

K Type Series

Coils, Filters

K5-S

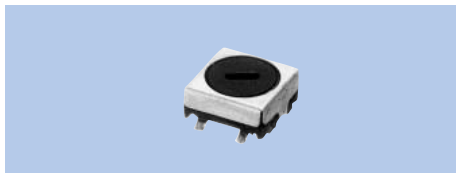


Specifications

- (1) 1~300μH (4) —
 (2) 0.1~20MHz (5) 40~70
 (3) F:±2%
 L:±4%

Features

- SMD
 1000pcs./Reel

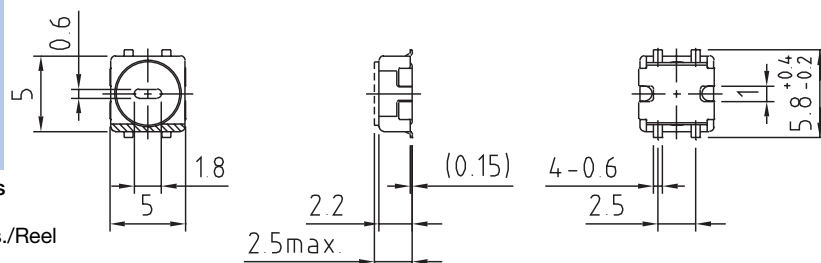

K5-S2




Specifications

- (1) 1~300μH
 (2) 0.1~20MHz
 (3) F:±2%
 L:±4%
 (4) —
 (5) 40~70

Features

- SMD
 1000pcs./Reel

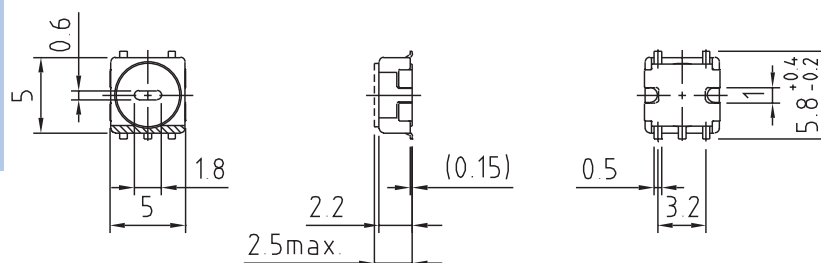

K5-N1




Specifications

- (1) 1~1200μH
 (2) 0.1~20MHz
 (3) F:±2%
 L:±5%
 (4) 5~15000pF×2
 (5) 50~80

Features

- SMD
 1000pcs./Reel

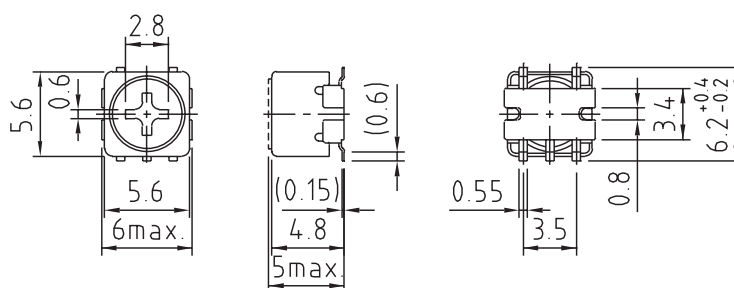

K5-N




Specifications

- (1) 1~5900μH
 (2) 0.1~20MHz
 (3) F:±2%
 L:±5%
 (4) 5~15000pF×2
 (5) 50~100

Features

- SMD
 1000pcs./Reel

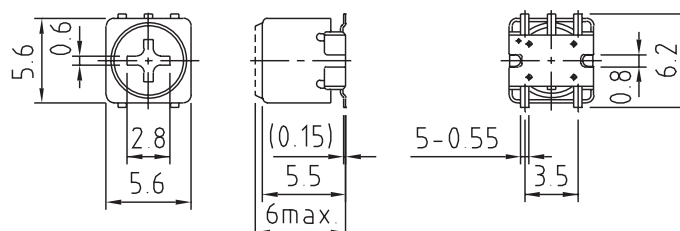

- (1) Inductance
 (2) Operational frequency
 (3) Variable range of F & L
 (4) Internal capacitance
 (5) Unloaded Q

[查询"K5-N1"供应商](#)

K5-R2




Specifications

- | | |
|---------------|-----------------|
| (1) 1~6700μH | (4) 5~15000pF×2 |
| (2) 10~500kHz | (5) 50~80 |
| (3) F:±2% | |
| L:±4% | |

Features

SMD
500psc./Reel

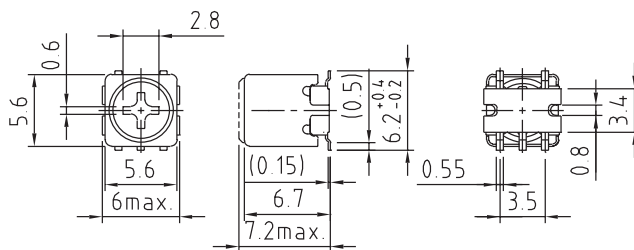


K5-R3



Specifications

- | | |
|---------------|-----------|
| (1) 1~4mH | (4) — |
| (2) 40~100kHz | (5) 40~60 |
| (3) F:±2% | |
| L:±5% | |

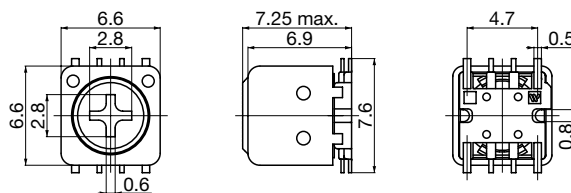


K5-H



Specifications

- | | |
|---------------|----------------|
| (1) 1~1000μH | (4) 10~10000pF |
| (2) 0.1~20MHz | (5) 50~100 |
| (3) F:±2% | |
| L:±5% | |

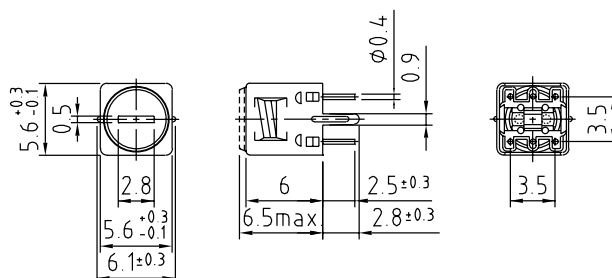


K5-C




Specifications

- | | |
|---------------|----------------|
| (1) 1~1000μH | (4) 10~10000pF |
| (2) 0.1~20MHz | (5) 50~100 |
| (3) F:±2% | |
| L:±5% | |

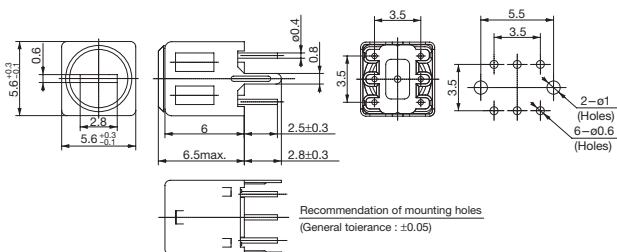


[查询"K5-N1"供应商](#)

K7-P

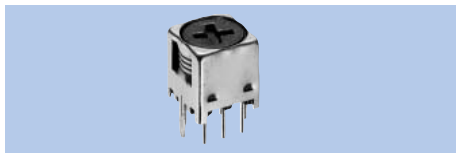

Specifications

- | | |
|---------------|----------------|
| (1) 1~1600μH | (4) 10~18000pF |
| (2) 0.1~20MHz | (5) 50~110 |
| (3) F:±2% | |
| L:±5% | |

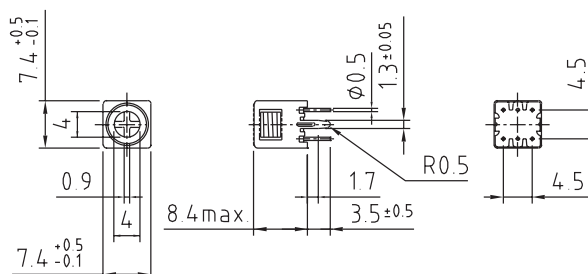


K7-D



Specifications

- | |
|---------------|
| (1) 5~100mH |
| (2) 10~300kHz |
| (3) F:±2% |
| L:±5% |
| (4) — |
| (5) 50~80 |

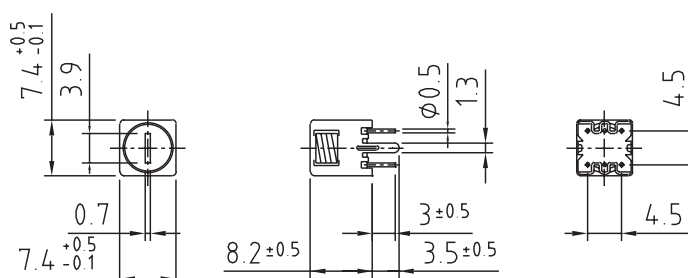


K7-T




Specifications

- | |
|---------------|
| (1) 1~850μH |
| (2) 0.1~20MHz |
| (3) F:±2% |
| L:±5% |
| (4) 10~430pF |
| (5) 60~110 |

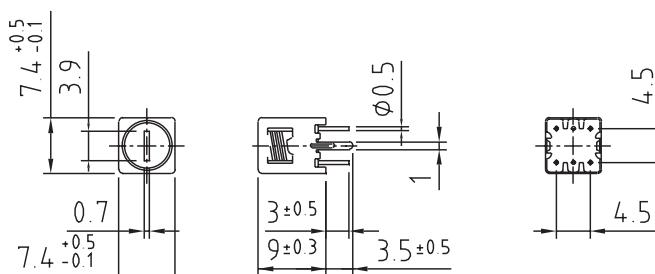


K7-T1

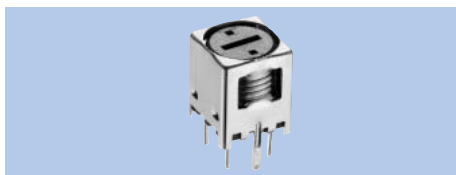

Specifications


- | |
|---------------|
| (1) 0.1~6mH |
| (2) 10~300kHz |
| (3) F:±2% |
| L:±5% |
| (4) — |
| (5) 40~70 |

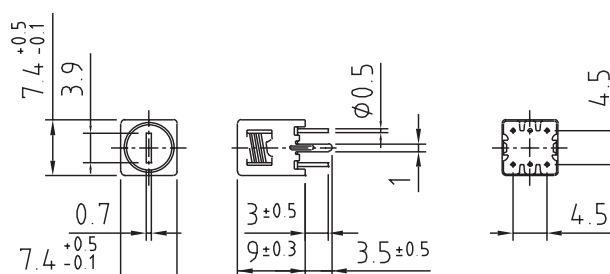

- | |
|-----------------------------|
| (1) Inductance |
| (2) Operational frequency |
| (3) Variable range of F & L |
| (4) Internal capacitance |
| (5) Unloaded Q |


[查询"K5-N1"供应商](#)

K7-T3

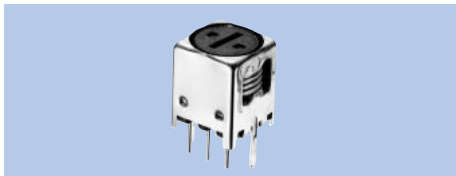

Specifications

- (1) 1~40mH
- (2) 0.1~1MHz
- (3) F:±2%
L:±5%
- (4) —
- (5) 50~140

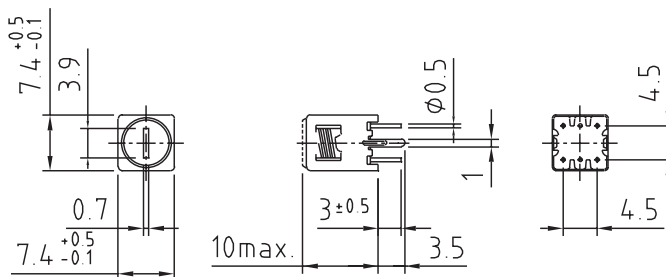


K7-H5(K7-H6)



Specifications

- (1) 1~1000μH
- (2) 0.1~20MHz
- (3) F:±3%
L:±6%
- (4) 10~18000pF
- (5) 50~140

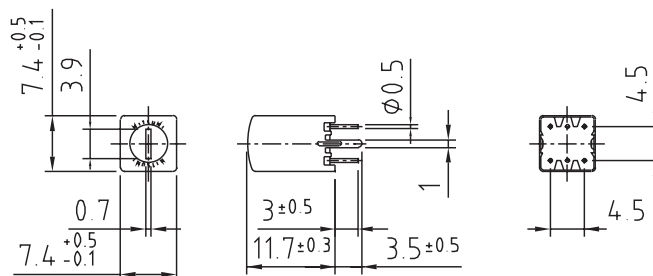


K7-J




Specifications

- (1) 1~40mH
- (2) 10~300kHz
- (3) L:±6%
- (4) —
- (5) 40~70

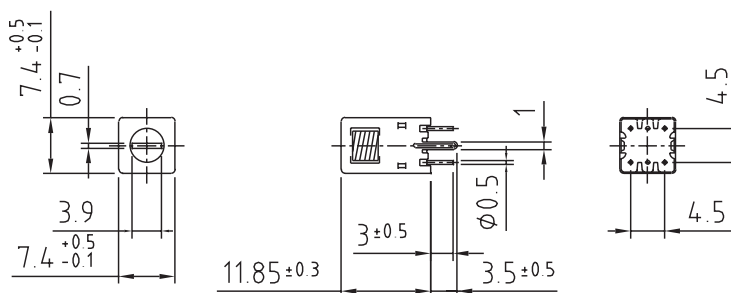


K7-J5

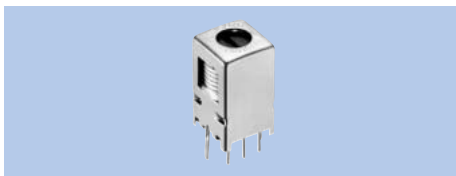

Specifications

- (1) 1~40mH
- (2) 10~300kHz
- (3) F:±3%
L:±6%
- (4) 10~18000pF
- (5) 40~70

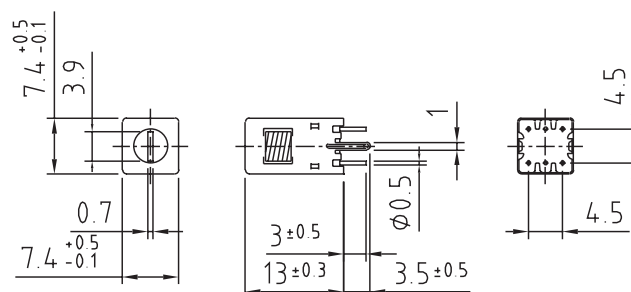

- (1) Inductance
- (2) Operational frequency
- (3) Variable range of F & L
- (4) Internal capacitance
- (5) Unloaded Q