


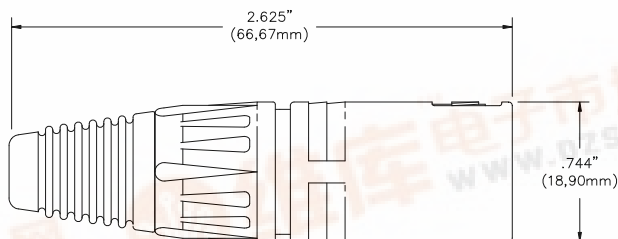


**Model 7283 & 7284**  
**3-Pin In-Line XLR, Silver Contacts, Nickel Finish**



**Model 7283, 3-Pin (M) In-Line XLR, Silver Contacts, Nickel Finish**

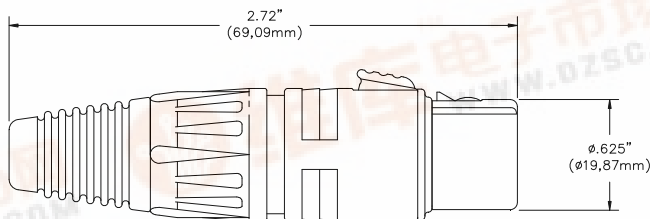

**Model 7284, 3-Pin (F) In-Line XLR, Silver Contacts, Nickel Finish**

**Features**

- 3-Pin XLR Plug (7283) and Jack (7284).
- Streamlined profile with compact shell.
- Handles 14 AWG (2.0mm<sup>2</sup> Max.).
- Low contact Resistance.
- Solderable.

**Materials**

- *Body:* Die Cast Zinc Alloy with Tarnish Resistant Nickel Finish
- *Contacts:* Silver Plated Brass
- *Strain Relief:* Clamp designed for durability; POM (Polyoxymethylene).

**Specifications**

<b>Number of Contacts</b>	3
<b>Contact Resistance</b>	≤ 3 mΩ
<b>Dielectric Strength</b>	1500 Vdc
<b>AWG</b>	14 AWG / 2.5mm <sup>2</sup> Max.
<b>Pull Strength</b>	45 lbs.
<b>Cable O.D. Range</b>	3.0mm - 6.5mm (0.118" to 0.255")

**Ordering Information**

Model: 7283, 7284

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500  
Where to Buy: [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

