

Model 1022

[查询"1022M-10M-F-106"供应商](#)



Single Point Load Cells

Features

- ◆ Capacities: 3 - 35 kg (6.61 - 77.16 lbs)
- ◆ Only 22mm (.09 inch) high
- ◆ Aluminum Construction
- ◆ Single point 350mm x 350mm (13.78 inch x 13.78 inch) platform
- ◆ IP66 protection
- ◆ OIML R60 (Cert. TC 2792) and NTEP (Cert. 96-122) approved
- ◆ Class I, II, III Division 1 - FM (Factory Mutual)
- ◆ EEx ia IIC T4 - PTB

Model 1022 is a low profile single point load cell designed for direct mounting of low cost weighing platforms.

Its small physical size, combined with high accuracy and aluminum construction, makes this load cell ideally suited for retail, bench and counting scales where savings in parts and labor due to simpler scale construction can be made.

Available in a range of capacities, from 3 to 35kg and approved to OIML, R60 (4000d) or NTEP 5000d, single). Environmental protection to IP66 is provided as standard.

Europe
Tedea-Huntleigh Europe
Ltd.

37 Portmanmoor Road
Cardiff
CF24 5HE
United Kingdom

Tel: +44 (0)29-20460231
Fax: +44(0)29-20462173

International
Tedea-Huntleigh International
Ltd.
2 Hozoran St.
New Industrial Zone
P.O. Box 8381, Netanya 42506
Israel

Tel: +972-9-863-8888
Fax: +972-9-863-8800

China
Beijing Tedea-Huntleigh
No. 16 Hong Da Bei Lu
Da Xing County, Beijing Eco-
nomic & Technology Develop-
ment Area,
Beijing 100176

Tel: +86-10-67881604-09
Fax: +86-10-67881576

Germany
Tedea-Huntleigh GmbH.
Mumlingweg 18
D-64297
Darmstadt-Eberstadt
Germany

Tel: +49-6151-94460
Fax: +49-6151-944640

France
SEEA sa
16 Rue Francis Vovelle
28000 Chartres
France

Tel: +33-237-33-3120
Fax: +33-237-3129

TEDEA **th**
HUNTLEIGH
EXCELLENCE IN LOAD CELLS

Contact Info

E-mail
sales@tedea-huntleigh.com
Website
www.tedea-huntleigh.com

7800 DEERING AVE.
P.O. BOX 7964
CANOGA PARK CA 91309-7964
USA

TEL: 800.626.2616
FAX: 818.340.1175



Model 1022

Single Point Load Cells

GRADE	E	F	G**	C3***	UNITS
1022M-10M-F-106" 供应商					
Rated Capacities	3, 5, 7, 10, 15, 20, 30, 35				kg
Rated Output	2.0 ± 10%				mV/V
Total Error*	0.0300	0.0200	0.0200	0.0200	±% of Applied Load
Zero Return after 30 mins	0.0500	0.0250	0.0170	0.0170	±% of Applied Load
Temperature Effect : On Output	0.0030	0.0014	0.0010	0.0010	±% of Applied Load / °C
Temperature Effect : On Zero	0.0100	0.0060	0.0040	0.0023	±% of Rated Output / °C
Eccentric Loading	0.0085	0.0085	0.0057	0.0057	±% of Applied Load / cm
Zero Balance	10.0				±% of Rated Output
Temperature range : Operating	-30 to +70				°C
Temperature range : Compensated	-10 to +40				°C
Safe Overload	150				% of Rated Capacity
Ultimate Overload	300				% of Rated Capacity
Excitation: Recommended	10				Volts AC or DC
Excitation: Maximum	15				Volts AC or DC
Input Impedance	415 ± 15				Ohms
Output Impedance	350 ± 3				Ohms
Insulation Impedance	>2000				Mega Ohms
Deflection at Rated Capacity	<0.4				mm
Weight	0.15				kg
Construction	Aluminum				
Environmental Protection	IP66				
Cable	0.5 Meter (Standard), 4 Wire, PVC, Single Floating Screen				
Approvals	OIML R60 (Certificate TC 2792) and NTEP (Certificate 96 - 122)				

* Total Error - According to OIML R60 ** 85% utilization standard *** 50% min utilization. Consult factory for other utilization factors. C4 Grade also available.

Outline Dimensions All Capacities (in mm)

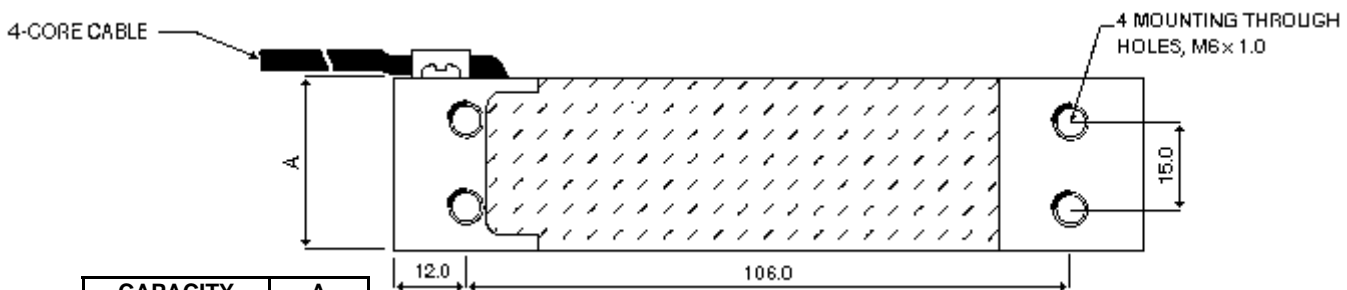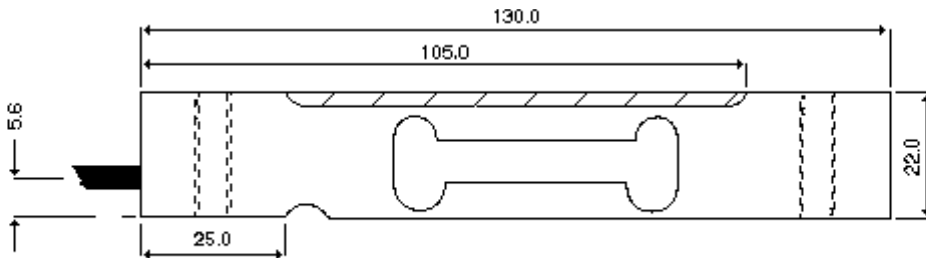

CAPACITY	A
3, 5, 7 kg	25.4
10, 15, 20, 30 kg	30.0
35 kg	40.0

Wiring Schematic Diagram (unbalanced bridge configuration)

