


Series 2512

查询"2512-562K"供应商

Surface Mount Power Inductors

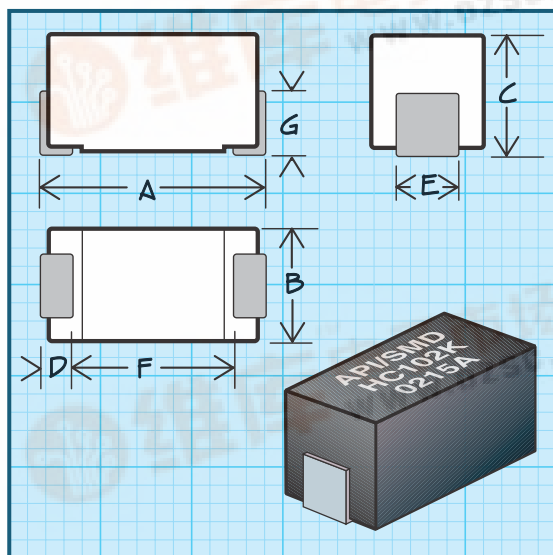

Physical Parameters

	Inches	Millimeters
A	0.235 to 0.255	5.97 to 6.48
B	0.085 to 0.105	2.16 to 2.67
C	0.090 to 0.110	2.29 to 2.79
D	0.060 to 0.080	1.52 to 2.03
E	0.035 to 0.055	0.89 to 1.40
F	0.100 (Ref. only)	2.54 (Ref. only)
G	0.058 (Ref. only)	1.47 (Ref. only)

Dimensions "A" and "C" are over terminals

Operating Temperature Range -55°C to +125°C

Maximum Power Dissipation at 60°C 0.56 W

Core Material Ferrite

Note Current rating is based on 60°C ambient and 125°C max. operating temperature. The Incremental Current is the current which causes a maximum change of inductance of 10%.

Packaging Tape & reel (12mm):
7" reel, 750 pieces max.; 13" reel, 2700 pieces max.

Made In the U.S.A. Patent Protected

PART NUMBER

INDUCTANCE
(μH) ±10%

TEST FREQUENCY (MHz)

DC RESISTANCE
MAXIMUM (OHMS)

CURRENT RATING
MAXIMUM (mA)

INCREMENTAL
CURRENT DC (mA)

SERIES 2512 FERRITE CORE

2512-102K	1.0	7.9	0.15	1640	1230
2512-122K	1.2	7.9	0.21	1390	1040
2512-152K	1.5	7.9	0.27	1220	920
2512-182K	1.8	7.9	0.29	1180	890
2512-222K	2.2	7.9	0.40	1000	750
2512-272K	2.7	7.9	0.54	865	649
2512-332K	3.3	7.9	0.75	734	551
2512-392K	3.9	7.9	0.82	702	527
2512-472K	4.7	7.9	1.0	636	477
2512-562K	5.6	7.9	1.1	606	455
2512-682K	6.8	7.9	1.2	580	435
2512-822K	8.2	7.9	1.3	557	418
2512-103K	10.0	7.9	1.5	519	389
2512-123K	12.0	2.5	1.6	503	377
2512-153K	15.0	2.5	1.8	474	355
2512-183K	18.0	2.5	2.6	394	296
2512-223K	22.0	2.5	3.5	340	255
2512-273K	27.0	2.5	3.7	330	248
2512-333K	33.0	2.5	3.8	326	245
2512-393K	39.0	2.5	3.9	322	242
2512-473K	47.0	2.5	4.2	310	233
2512-563K	56.0	2.5	4.6	296	222
2512-683K	68.0	2.5	5.1	281	211
2512-823K	82.0	2.5	5.6	278	209
2512-104K	100.0	2.5	6.0	260	195

Optional Tolerances: J = 5% H = 3% G = 2% F = 1%

POWER INDUCTORS



Delevan

www.delevan.com E-mail: apisales@delevan.com
270 Quaker Rd., East Aurora NY 14052 • Phone 716-652-3600 • Fax 716-652-4814

2/2002

PAGE
66