


[查询"CTCB1206F-601S"供应商](#)

CTCBF Series

Standard

From 6 Ω to 2,200 Ω

ENGINEERING KIT #16

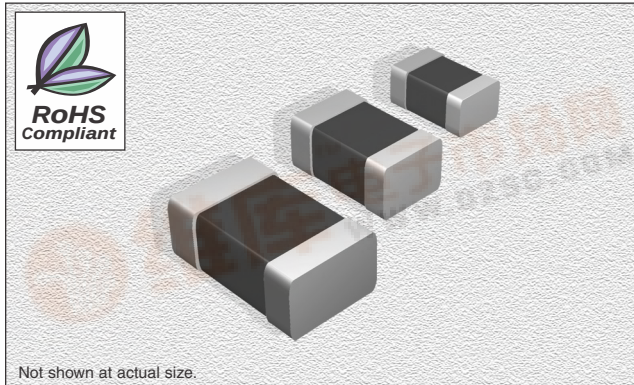

CHARACTERISTICS

Description: Standard multi-layer ferrite chip beads**Applications:** Noise suppression in computer peripherals, telecommunication equipment, data communication equipment and other consumer electronics**Operating Temperature:** -55°C to +125°C**Impedance Range:**

- CTCB0402F: 6-600 Ω
- CTCB0603F: 11-2200 Ω
- CTCB0805F: 7-2200 Ω
- CTCB1206F: 19-2000 Ω
- CTCB1210F: 31-90 Ω
- CTCB1806F: 50-170 Ω
- CTCB1812F: 70-125 Ω

Testing: Impedance is tested on an HP4287A at 100 MHz**Packaging:** Tape & Reel**Miscellaneous:** RoHS Compliant available.**Marking:** Reels marked with part number**Additional Information:** Additional electrical & physical information available upon request**Samples available. See website for ordering information.**

SPECIFICATIONS

Parts are available in $\pm 25\%$ tolerance only.

Part Number	Impedance (Ω)	Test Freq. (MHz)	DCR Max. (Ω)	IDC (mA)
CTCB0402F-060S	6	100	.05	500
CTCB0402F-100S	10	100	.05	500
CTCB0402F-400S	40	100	.30	300
CTCB0402F-800S	80	100	.40	200
CTCB0402F-121S	120	100	.50	200
CTCB0402F-241S	240	100	.50	200
CTCB0402F-481S	480	100	.80	100
CTCB0402F-601S	600	100	1.0	100
CTCB0603F-110S	11	100	0.1	400
CTCB0603F-190S	19	100	0.1	400
CTCB0603F-300S	30	100	0.3	400
CTCB0603F-400S	40	100	0.3	400
CTCB0603F-600S	60	100	0.4	200
CTCB0603F-800S	80	100	0.5	300
CTCB0603F-121S	120	100	0.7	200
CTCB0603F-221S	220	100	0.5	200
CTCB0603F-301S	300	100	1.2	150
CTCB0603F-451S	450	100	0.5	200
CTCB0603F-601S	600	100	1.8	150
CTCB0603F-751S	750	100	0.7	200
CTCB0603F-102S	1000	100	2.0	100
CTCB0603F-152S	1500	100	1.0	50
CTCB0603F-222S	2200	100	1.2	50
CTCB0805F-070S	7	100	0.1	600
CTCB0805F-090S	9	100	0.1	600
CTCB0805F-100S	10	100	0.2	600
CTCB0805F-110S	11	100	0.1	600
CTCB0805F-170S	17	100	0.1	600
CTCB0805F-320S	32	100	0.1	600
CTCB0805F-600S	60	100	0.2	500
CTCB0805F-700S	70	100	0.2	500
CTCB0805F-800S	80	100	0.4	400
CTCB0805F-121S	120	100	0.5	300
CTCB0805F-151S	150	100	0.6	200
CTCB0805F-221S	220	100	0.5	200
CTCB0805F-301S	300	100	0.3	300
CTCB0805F-401S	400	100	0.5	200
CTCB0805F-501S	500	100	0.4	300
CTCB0805F-601S	600	100	0.4	200
CTCB0805F-751S	750	100	0.5	200
CTCB0805F-102S	1000	100	1.5	100
CTCB0805F-152S	1500	100	1.0	100
CTCB0805F-202S	2000	100	0.5	100
CTCB0805F-222S	2200	100	1.0	100
CTCB1206F-190S	19	100	0.2	500
CTCB1206F-260S	26	100	0.2	500
CTCB1206F-310S	31	100	0.2	500
CTCB1206F-320S	32	100	0.1	600
CTCB1206F-500S	50	100	0.2	400
CTCB1206F-600S	60	100	0.1	500
CTCB1206F-700S	70	100	0.5	200
CTCB1206F-800S	80	100	0.2	400
CTCB1206F-900S	90	100	0.2	400
CTCB1206F-101S	100	100	.15	500
CTCB1206F-121S	120	100	0.2	300
CTCB1206F-151S	150	100	0.4	200
CTCB1206F-201S	200	100	0.2	400
CTCB1206F-221S	220	100	0.5	300
CTCB1206F-301S	300	100	0.2	300
CTCB1206F-401S	400	100	0.6	100
CTCB1206F-501S	500	100	0.2	400
CTCB1206F-601S	600	100	0.5	200
CTCB1206F-102S	1000	100	0.6	100
CTCB1206F-122S	1200	50	0.5	200
CTCB1206F-152S	1500	50	0.9	100
CTCB1206F-202S	2000	30	0.6	200
CTCB1210F-310S	31	100	0.3	400
CTCB1210F-320S	32	100	0.2	500
CTCB1210F-520S	52	100	0.3	400
CTCB1210F-600S	60	100	0.3	400
CTCB1210F-900S	90	100	0.2	500
CTCB1806F-500S	50	100	0.2	600
CTCB1806F-600S	60	100	0.2	600
CTCB1806F-800S	80	100	0.2	600
CTCB1806F-101S	100	100	0.3	500
CTCB1806F-151S	150	100	0.3	500
CTCB1806F-171S	170	100	0.3	500
CTCB1812F-700S	70	100	0.4	300
CTCB1812F-121S	120	100	0.4	300
CTCB1812F-125S	125	100	0.4	300

02.18.09

Manufacturer of Passive Components

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2009 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice

[查询"CTCB1206F-601S"供应商](#)


CTCBF Series

Standard


PHYSICAL DIMENSIONS

Size		A	B	C	D
0402/1005	inches	0.039±0.006	0.02±0.006	0.02±0.006	0.01±0.006
	mm	1.0±0.15	0.5±0.15	0.5±0.15	0.25±0.15
0603/1608	inches	0.063±0.008	0.03±0.008	0.03±0.008	0.016±0.008
	mm	1.6±0.2	0.8±0.2	0.8±0.2	0.4±0.2
0805/2012	inches	0.08±0.008	0.047±0.008	0.035±0.008	0.02±0.012
	mm	2.0±0.2	1.2±0.2	0.9±0.2	0.5±0.3
1206/3216	inches	0.126±0.008	0.063±0.008	0.043±0.008	0.02±0.012
	mm	3.2±0.2	1.6±0.2	1.1±0.2	0.5±0.3
1210/3225	inches	0.126±0.008	0.098±0.008	0.05±0.008	0.02±0.12
	mm	3.2±0.2	2.5±0.2	1.3±0.2	0.3±0.3
1806/4516	inches	0.177±0.01	0.063±0.008	0.063±0.008	0.02±0.012
	mm	4.5±0.25	1.6±0.2	1.6±0.2	0.5±0.3
1812/4532	inches	0.177±0.008	0.126±0.008	0.05±0.008	0.02±0.012
	mm	4.5±0.2	3.2±0.2	1.5±0.2	0.5±0.3


CTCB0402F




CTCB0603F




CTCB0805F




CTCB1206F

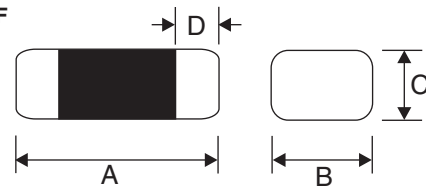


CTCB1210F

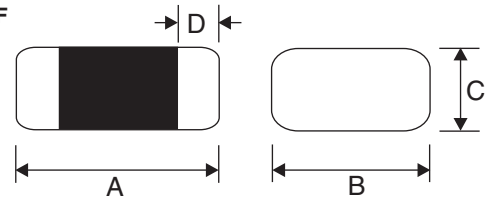

CTCB1806F

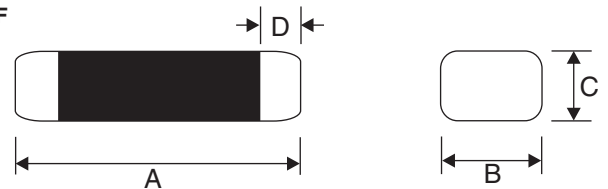

CTCB1812F

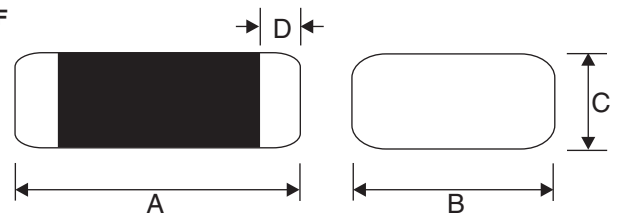

02.18.09