

查询"CT0805CSF-060K"供应商

CT0805CSF Series

From 2.2 nH to 2700 nH

ENGINEERING KIT #5F



CHARACTERISTICS

Description: SMD ceramic core wire-wound chip inductor

Applications: LC resonant circuits such as oscillator and signal generators, impedance matching, circuit isolation, RF filters, disk drives and computer peripherals, audio and video equipment, TV, radio and telecommunication equipment

Operating Temperature: -40°C to +125°C

Inductance Tolerance: $\pm 2\%$, $\pm 5\%$, $\pm 10\%$, $\pm 20\%$

Testing: Inductance and Q are tested on an HP4287A at specified frequency

Packaging: Tape & Reel


Marking: Reels are marked with inductance code and tolerance

Miscellaneous: RoHS Compliant. Parts are also available without a clear plastic cap. Other values available

Additional Information: Additional electrical & physical information available upon request

Samples available. See website for ordering information.

PAD LAYOUT

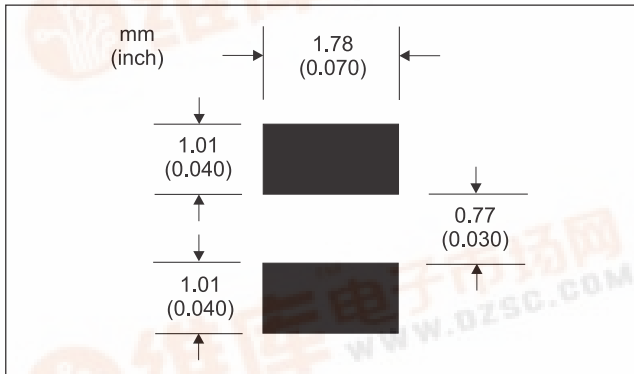


SPECIFICATIONS

Please specify tolerance code when ordering.
 CT0805CSF-120_ ← G = $\pm 2\%$, J = $\pm 5\%$, K = $\pm 10\%$, M = $\pm 20\%$
 ** = K or M only * = J, K or M only

Part Number	Inductance (nH)	L Test Freq. (MHz)	Q Fact. Min.	Q Test Freq. (MHz)	SRF Min. (MHz)	DCR Max. (Ω)	Rated DC (mA)
CT0805CSF-020_**	2.2	250	15	1500	6000	.08	600
CT0805CSF-2N8_*	2.8	250	80	1500	7900	.06	800
CT0805CSF-3N0_*	3.0	250	65	1500	7900	.06	800
CT0805CSF-030_*	3.3	250	50	1500	7900	.08	600
CT0805CSF-050_*	5.6	250	65	1000	5500	.08	600
CT0805CSF-060_*	6.8	250	50	1000	5500	.11	600
CT0805CSF-070_*	7.5	250	50	1000	4500	.14	600
CT0805CSF-080_*	8.2	250	50	1000	4700	.12	600
CT0805CSF-100_	10	250	60	500	4200	.10	600
CT0805CSF-120_	12	250	50	500	4000	.15	600
CT0805CSF-150_	15	250	50	500	3400	.17	600
CT0805CSF-180_	18	250	50	500	3300	.20	600
CT0805CSF-220_	22	250	55	500	2600	.22	500
CT0805CSF-240_	24	250	50	500	2000	.22	500
CT0805CSF-270_	27	250	55	500	2500	.25	500
CT0805CSF-330_	33	250	60	500	2050	.27	500
CT0805CSF-360_	36	250	55	500	1700	.27	500
CT0805CSF-390_	39	250	60	500	2000	.29	500
CT0805CSF-430_	43	200	60	500	1650	.34	500
CT0805CSF-470_	47	200	60	500	1650	.31	500
CT0805CSF-560_	56	200	60	500	1550	.34	500
CT0805CSF-680_	68	200	60	500	1450	.38	500
CT0805CSF-820_	82	150	65	500	1300	.42	400
CT0805CSF-910_	91	150	65	500	1200	.48	400
CT0805CSF-101_	100	150	65	500	1200	.46	400
CT0805CSF-111_	110	150	50	250	1000	.48	400
CT0805CSF-121_	120	150	50	250	1100	.51	400
CT0805CSF-151_	150	100	50	250	920	.56	400
CT0805CSF-181_	180	100	50	250	870	.64	400
CT0805CSF-221_	220	100	50	250	850	.70	400
CT0805CSF-241_	240	100	44	250	690	1.0	350
CT0805CSF-271_	270	100	48	250	650	1.0	350
CT0805CSF-331_	330	100	48	250	600	1.4	310
CT0805CSF-391_	390	100	48	250	560	1.5	290
CT0805CSF-471_	470	50	33	100	375	1.8	250
CT0805CSF-561_	560	25	23	50	340	1.9	230
CT0805CSF-621_	620	25	23	50	220	2.2	210
CT0805CSF-681_	680	25	23	50	188	2.2	190
CT0805CSF-821_	820	25	23	50	215	2.4	180
CT0805CSF-102_	1000	25	20	50	100	2.5	170
CT0805CSF-122_	1200	7.9	18	25	100	2.5	170
CT0805CSF-152_	1500	7.9	16	25	100	2.5	170
CT0805CSF-182_	1800	7.9	16	7.9	80	2.5	170
CT0805CSF-222_	2200	7.9	16	7.9	60	2.7	160
CT0805CSF-272_	2700	7.9	16	7.9	50	2.95	150

PHYSICAL DIMENSIONS

Size	A Max.	B Max.	C Max.	D	E	F	G
mm	2.29	1.73	1.52	1.27	0.51	1.02	0.51
inches	0.09	0.07	0.06	0.05	0.02	0.04	0.02

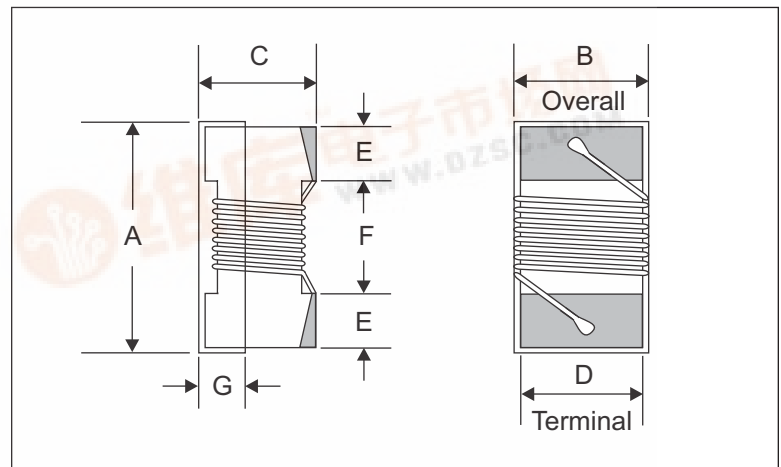

11.29.06

Manufacturer of Passive and Discrete Semiconductor Components

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2006 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice

