


Low Value Metal Film Resistors

2500 Series

- Resistance values down to 0.025 ohms
- Low inductance
- Tolerances down to 1%
- Flameproof protection

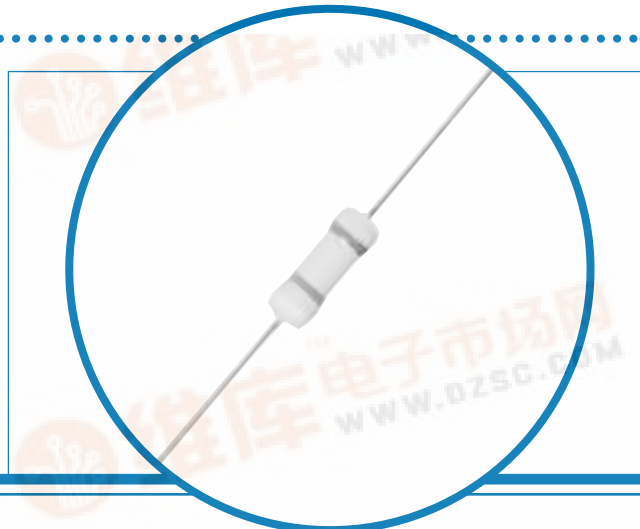


Electrical Data

		2504	Notes
Power rating at 25°C	watts	2.0	
Power rating at 70°C	watts	1.5	
Resistance range	ohms	0R025 to 1	
Isolation voltage	volts	700	
TCR (+20° to 70°C)	ppm/°C	See Figure 1	
Resistance tolerance	%	1, 2, 5, 10	Measured at 6mm from caps
Thermal impedance	°C/watt	65	
Values		E24	
Operating temperature range	°C	-55 to +150	

Physical Data

Dimensions (mm) & weight (g)							
Type	L Max	D Max	f min	d nom	PCB mounting centres	Min. bend radius	Wt. nom
2504	14.5	5.3	23.8	0.8	20.3	1.2	1.1



Construction

The metal film is deposited on a high purity ceramic rod. End caps are force fitted and termination wires welded to the caps. The resistive film is then adjusted to the required value; finally the cement protection is applied to the resistor body and marked with indelible ink.

Terminations

- Material** Solder-coated copper wire.
- Strength** The terminations meet the requirements of IEC 68.2.21
- Solderability** The terminations meet the requirements of IEC 115-1, Clause 4.17.3.2

Marking

Values below R10 are colour coded with 3 bands. Values R10 and above are marked with 4 bands. IEC 62 colours are used.

Solvent Resistance

The body protection and marking are resistant to all normal industrial cleaning fluids suitable for printed circuits.

Flammability

The resistors will not burn or emit incandescent particles under any condition of applied temperature or power overload.

General Note

Welwyn Components reserves the right to make changes in product specification without notice or liability. All information is subject to Welwyn's own data and is considered accurate at time of going to print.

© Welwyn Components Limited · Bedlington, Northumberland NE22 7AA, UK
Telephone: +44 (0) 1670 822181 · Facsimile: +44 (0) 1670 829465 · Email: info@welwyn-tt.com · Website: www.welwyn-tt.com

Welwyn

A subsidiary of
TT electronics plc

Issue B · 03.02