

[查询"CTS4F-472K"供应商](#)


CTS4F Series

From .10 μ H to 150,000 μ H

SPECIFICATIONS

Please specify tolerance code when ordering.
CTS4F-R10 ← J = $\pm 5\%$, K = $\pm 10\%$

ENGINEERING KIT #20F

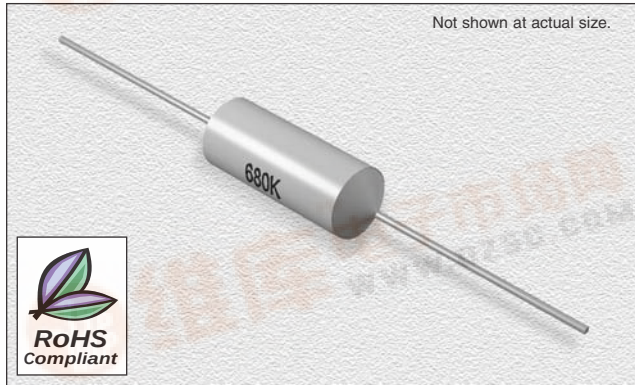

CHARACTERISTICS

Description: Axial leaded (shielded) inductor

Applications: Used for high reliability applications. Vital for telecommunication applications. Ideal for various RF applications. Higher DC current than CTS3 series

Operating Temperature: -55°C to +125°C

Inductance Tolerance: $\pm 5\%$ & $\pm 10\%$

Testing: Inductance and Q are tested on an HP4284A or HP4285A at specified frequency

Packaging: Tape & Reel, 2,500 parts per reel

Marking: EIA color banded with inductance code or marked with part value

Material: Molded epoxy resin over the magnetic core for superior shielding and reliability.

Incremental Current: DC current required to cause a maximum reduction of 5% in inductance for nominal value of inductance measured with zero DC current

Shielding: Less than 3% coupling units side by side @ 1 kHz

Miscellaneous: RoHS Compliant. Other values available

Additional Information: Additional electrical & physical information available upon request

Samples available. See website for ordering information.

PHYSICAL DIMENSIONS

Size	A Max.	B Max.	C Typ.	24 AWG Nom.
mm	11.4	4.06	29.2	0.511
inches	0.45	0.16	1.15	0.02

Part Number	Inductance (μ H)	L Test Freq. (Hz)	Q Fact. Min.	Q Test Freq. (MHz)	SRF Min. (MHz)	DCR Max. (Ω)	Rated DC (mA)	Incr (mA)
CTS4F-R10	.10	25M	50	25	400	.02	3000	3000
CTS4F-R12	.12	25M	50	25	400	.03	2860	2860
CTS4F-R15	.15	25M	50	25	400	.03	2600	2600
CTS4F-R18	.18	25M	50	25	400	.04	2300	2300
CTS4F-R22	.22	25M	50	25	400	.05	2050	2050
CTS4F-R27	.27	25M	50	25	400	.09	1625	1625
CTS4F-R33	.33	25M	47	25	325	.12	1400	1400
CTS4F-R39	.39	25M	47	25	390	.16	1220	1200
CTS4F-R47	.47	25M	47	25	264	.22	1060	1060
CTS4F-R56	.56	25M	45	25	249	.29	900	900
CTS4F-R68	.68	25M	43	25	221	.38	790	790
CTS4F-R82	.82	25M	41	25	200	.45	725	725
CTS4F-1R0	1.0	25M	42	25	156	.05	2080	2080
CTS4F-1R2	1.2	7.9M	43	7.9	144	.07	1840	1840
CTS4F-1R5	1.5	7.9M	41	7.9	128	.09	1560	1560
CTS4F-1R8	1.8	7.9M	42	7.9	121	.11	1480	1480
CTS4F-2R2	2.2	7.9M	42	7.9	108	.14	1290	1290
CTS4F-2R7	2.7	7.9M	41	7.9	96	.18	1130	1130
CTS4F-3R3	3.3	7.9M	41	7.9	88	.26	950	950
CTS4F-3R9	3.9	7.9M	41	7.9	84	.35	815	815
CTS4F-4R7	4.7	7.9M	42	7.9	72	.47	710	710
CTS4F-5R6	5.6	7.9M	42	7.9	69	.51	680	680
CTS4F-6R8	6.8	7.9M	42	7.9	62	.75	560	560
CTS4F-8R2	8.2	7.9M	46	7.9	58	.83	535	535
CTS4F-100	10	7.9M	46	7.9	53	1.3	432	432
CTS4F-120	12	2.5M	50	2.5	47	1.7	368	368
CTS4F-150	15	2.5M	50	2.5	41	2.3	325	325
CTS4F-180	18	2.5M	50	2.5	43	.67	596	235
CTS4F-220	22	2.5M	50	2.5	38	.74	565	220
CTS4F-270	27	1.0k	50	2.5	36	.85	526	200
CTS4F-330	33	1.0k	50	2.5	33	.93	505	190
CTS4F-390	39	1.0k	50	2.5	29	1.3	429	180
CTS4F-470	47	1.0k	55	2.5	27	1.5	400	175
CTS4F-560	56	1.0k	55	2.5	25	1.6	380	160
CTS4F-680	68	1.0k	55	2.5	23	2.2	328	150
CTS4F-820	82	1.0k	55	2.5	14	1.9	349	140
CTS4F-101	100	1.0k	65	2.5	12	2.3	322	120
CTS4F-121	120	1.0k	65	.79	11	2.4	311	95
CTS4F-151	150	1.0k	65	.79	11	2.8	294	90
CTS4F-181	180	1.0k	65	.79	10	3.1	277	85
CTS4F-221	220	1.0k	65	.79	9.4	3.5	251	80
CTS4F-271	270	1.0k	65	.79	8.0	4.5	231	70
CTS4F-331	330	1.0k	65	.79	7.3	5.1	215	65
CTS4F-391	390	1.0k	65	.79	6.9	5.6	205	60
CTS4F-471	470	1.0k	70	.79	6.5	6.4	192	58
CTS4F-561	560	1.0k	70	.79	6.0	8.0	174	55
CTS4F-681	680	1.0k	75	.79	5.6	8.8	163	50
CTS4F-821	820	1.0k	70	.79	4.8	10	151	45
CTS4F-102	1000	1.0k	65	.79	4.5	12	139	40
CTS4F-122	1200	1.0k	70	.25	2.6	15	125	35
CTS4F-152	1500	1.0k	70	.25	2.5	17	119	33
CTS4F-182	1800	1.0k	70	.25	2.3	19	111	30
CTS4F-222	2200	1.0k	70	.25	2.2	22	103	27
CTS4F-272	2700	1.0k	70	.25	2.1	25	97	25
CTS4F-332	3300	1.0k	70	.25	2.0	33	85	22
CTS4F-392	3900	1.0k	70	.25	1.8	37	80	20
CTS4F-472	4700	1.0k	70	.25	1.7	51	68	19
CTS4F-562	5600	1.0k	70	.25	1.6	54	66	17
CTS4F-682	6800	1.0k	70	.25	1.5	62	62	16
CTS4F-822	8200	1.0k	70	.25	1.4	86	52	15
CTS4F-103	10000	1.0k	70	.25	1.3	93	50	14
CTS4F-123	12000	1.0k	50	.25	.88	84	53	13
CTS4F-153	15000	1.0k	50	.079	.78	97	49	12
CTS4F-183	18000	1.0k	50	.079	.72	104	48	10
CTS4F-223	22000	1.0k	50	.079	.57	145	40	9.0
CTS4F-273	27000	1.0k	50	.079	.46	195	34	8.0
CTS4F-333	33000	1.0k	50	.079	.42	222	32	7.0
CTS4F-393	39000	1.0k	50	.079	.42	242	31	6.0
CTS4F-473	47000	1.0k	50	.079	.37	217	27	5.0
CTS4F-563	56000	1.0k	50	.079	.36	362	25	5.0
CTS4F-683	68000	1.0k	50	.079	.34	410	24	4.0
CTS4F-823	82000	1.0k	50	.079	.33	440	23	3.0
CTS4F-104	100000	1.0k	50	.079	.32	484	22	3.0
CTS4F-154	150000	25k	30	.025	.18	560	15	3.0

08.14.07

Manufacturer of Passive and Discrete Semiconductor Components

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2007 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice

