

MSM6404A/6404VS

High speed and High performance 4-Bit Microcontroller

GENERAL DESCRIPTION


The MSM6404A microcontroller is a low-power device implemented in complementary metal-oxide semiconductor technology. The MSM6404A is optimized for high-speed processing and complicated-control applications.

The MSM6404VS is a CMOS 4-bit microcontroller that employs an external EPROM using a piggy-back package in place of the program memory (ROM) internal to the MSM6404A.

The MSM6404VS can be used for program development verification because the programs can be modified by programming an external EPROM 2732 equivalent or 2764A equivalent.

FEATURES


- Mask ROM (MSM6404A) : 4000 words × 8 bits
- External ROM (MSM6404VS) : 8196 words × 8 bits
- RAM (including the stack area) : 256 words × 4 bits
- I/O port
 - Input-output port : 8 ports × 4 bits
 - Input port : 1 port × 4 bits
 4 bits are for input ports having a latch; the other 32 bits are input/output ports that allow bit manipulation
- Three built-in counters : 12-bit time-base counter
12-bit programmable timer
8-bit high-speed programmable timer/event counter
- Built-in 8-bit serial I/O register (with 3-bit counter)
- Five interrupts with five priority levels (4 internal, 1 external)
- 32 stacks (in RAM)
- Power-down features
- Minimum instruction execution time : 952 ns @ 4.2 MHz clock
- Instruction systems suitable for control
- Fully static operation
- Low power consumption
- Single 5 V supply
- Package options:
 - MSM6404A
 - 42-pin plastic DIP (DIP42-P-600-2.54) : (Product name : MSM6404A-xxxRS)
 - 44-pin plastic QFP (QFP44-P-910-0.80-K) : (Product name : MSM6404A-xxxGS-K)
 - 44-pin plastic QFP (QFP44-P-910-0.80-2K) : (Product name : MSM6404A-xxxGS-2K)
 - MSM6404VS
 - 42-pin ceramic piggyback (ADIP42-C-600-2.54) : (Product name : MSM6404VS)
xxx indicates a code number.

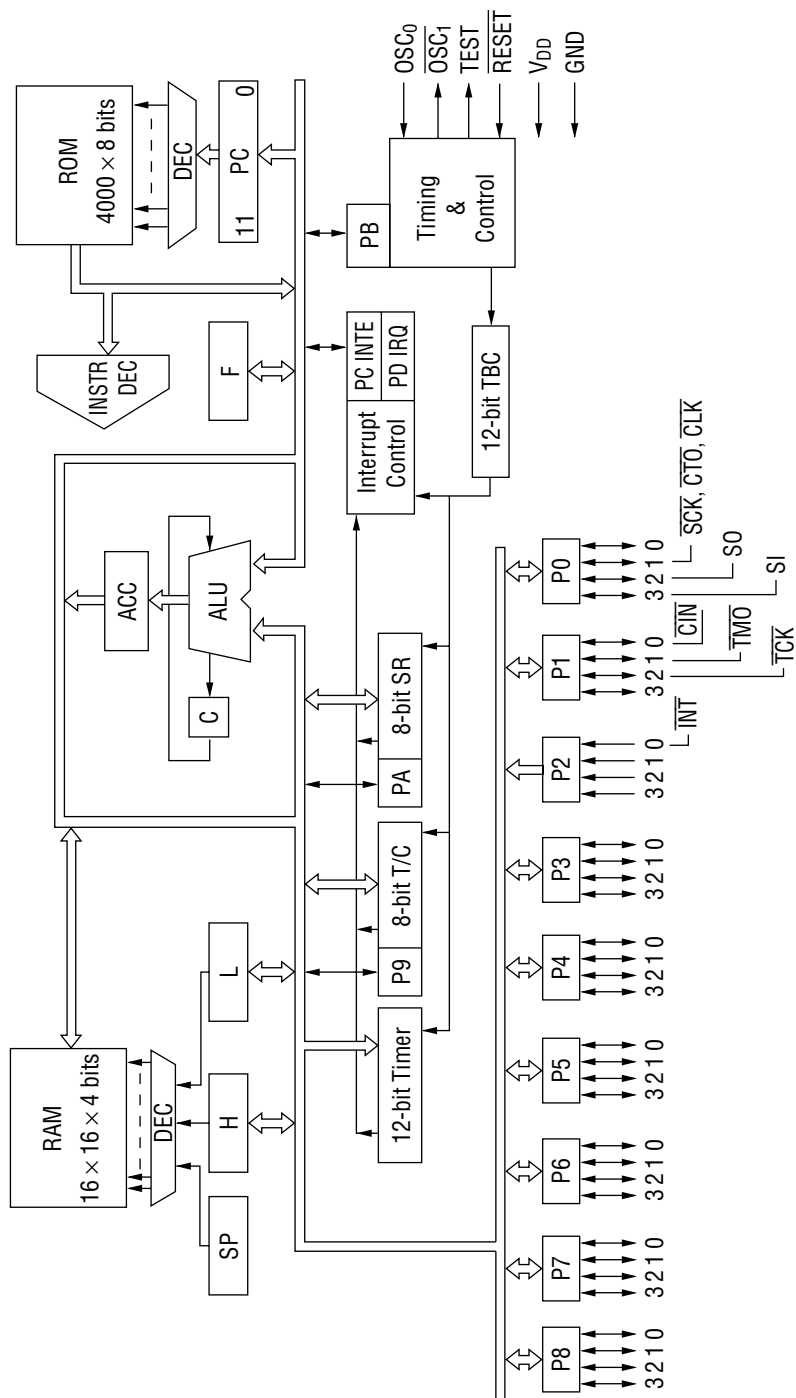MSM6404A

[查询"MSM6404"供应商](#)


BLOCK DIAGRAM (continued)

MSM6404VS

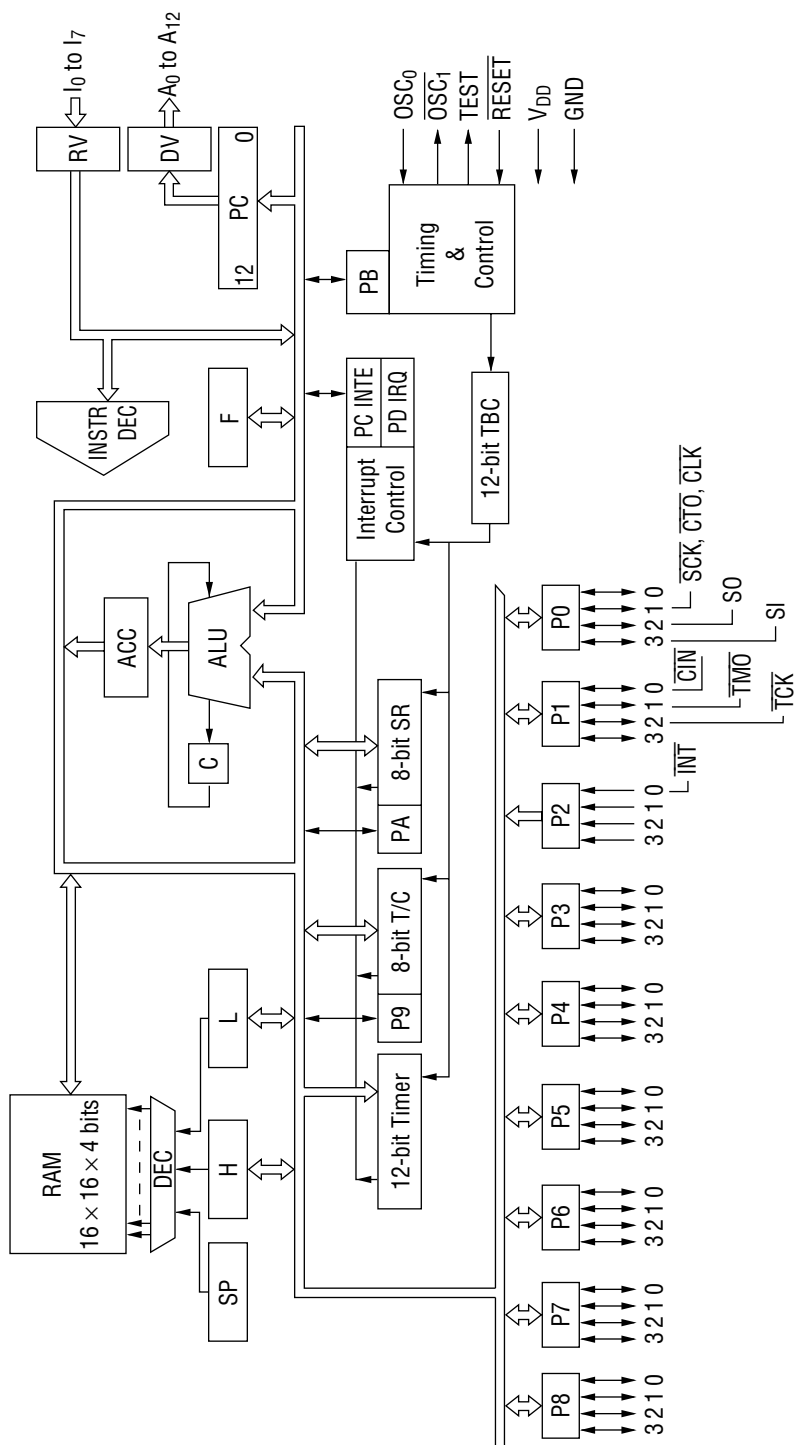

[查询"MSM6404"供应商](#)


PIN CONFIGURATION (TOP VIEW)

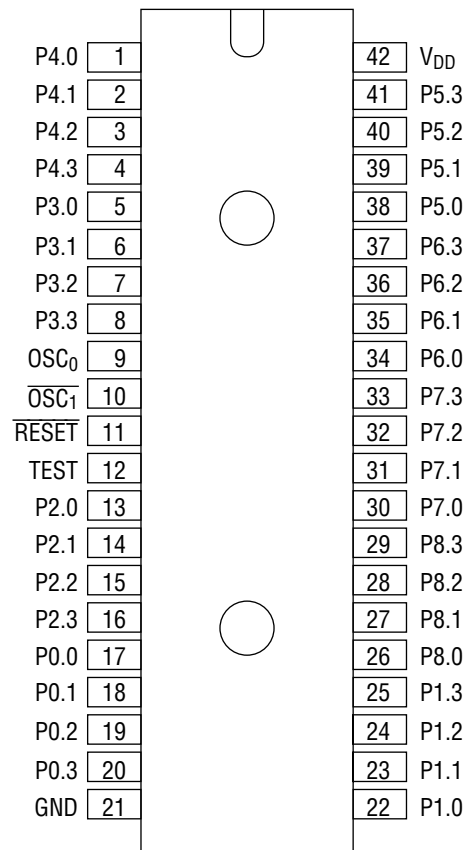

42-Pin Plastic DIP

[查询"MSM6404"供应商](#)

PIN CONFIGURATION (TOP VIEW) (continued)

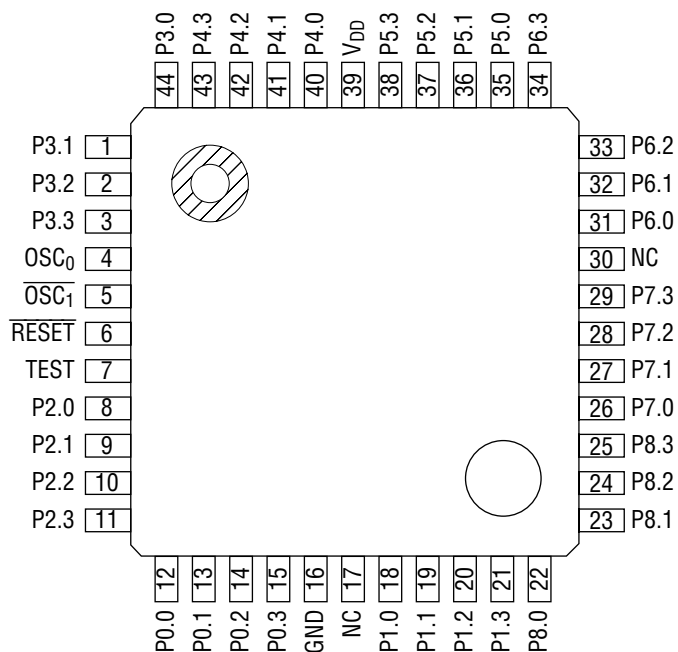


NC: No-connection pin

44-Pin Plastic QFP

[查询"MSM6404"供应商](#)

PIN CONFIGURATION (TOP VIEW) (continued)

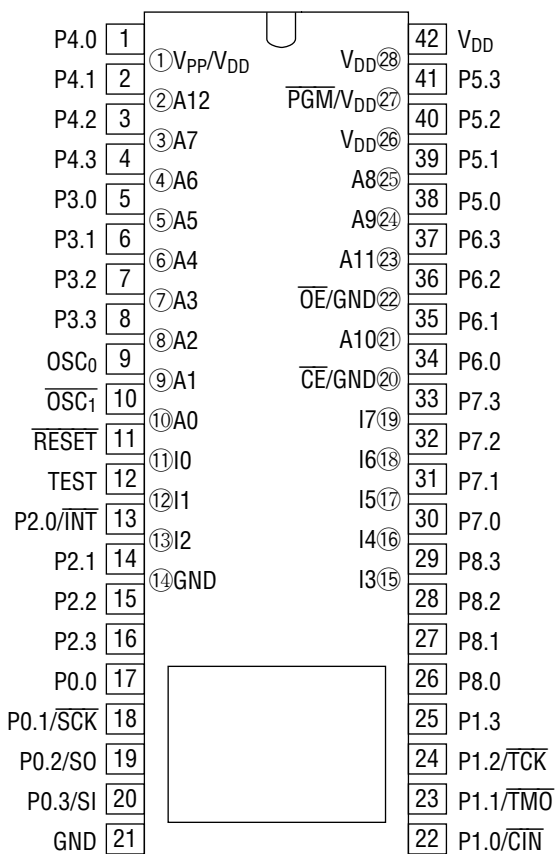

42-Pin Ceramic Piggyback

[查询"MSM6404"供应商](#)

PIN DESCRIPTIONS

Symbol	Type	Description	During reset
P0.0 P0.1/ $\overline{\text{SCK}}$ P0.2/SO P0.3/SI	I/O	P0.1 is shared with serial clock ($\overline{\text{SCK}}$) input/output. P0.2 is shared with serial data (SO) output. P0.3 is shared with serial data (SI) input.	"1"
P1.0/ $\overline{\text{CIN}}$ P1.1/ $\overline{\text{TMO}}$ P1.2/ $\overline{\text{TCK}}$ P1.3	I/O	P1.0 is shared with counter input ($\overline{\text{CIN}}$). P1.1 is shared with timer output ($\overline{\text{TMO}}$). P1.2 is shared with timer clock input ($\overline{\text{TCK}}$).	"1"
P2.0/ $\overline{\text{INT}}$ P2.1 P2.2 P2.3	I	P2.0 is shared with external interrupt input ($\overline{\text{INT}}$). } Input port with a latch, built-in pull-up resistor	The latch is reset.
P3.0 to 3.3	I/O	—	"1"
P4.0 to 4.3 P5.0 to 5.3	I/O I/O	} 8-bit output ports (at OPT instruction execution)	"0"
P6.0 to 6.3	I/O		
P7.0 to 7.3	I/O	—	"0"
P8.0 to 8.3	I/O	—	"0"
OSC ₀ OSC ₁	I O	Crystal connection pins for clock oscillation	Oscillation waveform
TEST	O	(Test pin for manufacturer)	Pulse output
$\overline{\text{RESET}}$	I	Input pin for system reset	—
V _{DD} GND	—	Power supply voltage pins	—

Note: 1. The ports except for pins P2.0 to P2.3 are pseudo bidirectional ports.
 2. When each port is used for output, the MSM6404A can drive one TTL (one input) and the MSM6404VS can drive one LS TTL (one input).

Upper Pins for MSM6404VS

Symbol	Type	Description
A0 to A12	O	Address output
I0 to I7	I	Data input
$\overline{\text{CE}}$ /GND	I	Chip enable input
$\overline{\text{OE}}$ /GND	I	Output enable input
$\overline{\text{PGM}}$ /V _{DD}	I	Program input
V _{DD} GND	—	Power supply voltage pins
V _{PP} /V _{DD}	—	Programed power supply voltage pin

[查询"MSM6404"供应商](#)
ABSOLUTE MAXIMUM RATINGS (MSM6404A)

Parameter	Symbol	Condition	Rating	Unit
Power Supply Voltage	V_{DD}	$T_a = 25^\circ\text{C}$	-0.3 to +7	V
Input Voltage	V_I		-0.3 to V_{DD}	V
Output Voltage	V_O		-0.3 to V_{DD}	V
Power Dissipation	P_D	$T_a = 25^\circ\text{C}$ per package	200 max.	mW
		$T_a = 25^\circ\text{C}$ per output	50 max.	mW
Storage Temperature	T_{STG}	—	-55 to +150	$^\circ\text{C}$

RECOMMENDED OPERATING CONDITIONS (MSM6404A)

Parameter	Symbol	Condition	Range	Unit
Power Supply Voltage	V_{DD}	$f_{OSC} \leq 1 \text{ MHz}$	3 to 6	V
		$f_{OSC} \leq 4.2 \text{ MHz}$	4.5 to 5.5	V
Data-Hold Voltage	V_{DDH}	$f_{OSC} = 0 \text{ Hz}$	2 to 6	V
Operating Temperature	T_{op}	—	-40 to +85	$^\circ\text{C}$
Fan Out	N	MOS load	15	—
		TTL load	1	

Note: Refer to the f_{OSC} - V_{DD} characteristic in OPERATING CHARACTERISTICS for the relation-ship between power supply voltage and operating frequency.

[查询"MSM6404"供应商](#)

ELECTRICAL CHARACTERISTICS (MSM6404A)

DC Characteristics

(V_{DD} = 5 V ±10%, T_a = -40 to +85°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
"H" Input Voltage*1, *2	V _{IH}	—	2.4	—	V _{DD}	V
"H" Input Voltage*3, *4	V _{IH}	—	3.6	—	V _{DD}	V
"L" Input Voltage	V _{IL}	—	-0.3	—	+0.8	V
"H" Output Voltage*1, *5	V _{OH}	I _O = -15 μA	4.2	—	—	V
"L" Output Voltage*1	V _{OL}	I _O = 1.6 mA	—	—	0.4	V
"L" Output Voltage*5	V _{OL}	I _O = 15 μA	—	—	0.4	V
Input Current*3	I _{IH} /I _{IL}	V _I = V _{DD} /0 V	—	—	15/-15	μA
Input Current*2, *4	I _{IH} /I _{IL}	V _I = V _{DD} /0 V	—	—	1/-30	μA
"H" Output Current*1	I _{OH}	V _O = 2.4 V	-0.1	—	—	mA
"H" Output Current*1	I _{OH}	V _O = 0.4 V	—	—	-1.2	mA
Input Capacitance	C _I	f = 1 MHz, T _a = 25°C	—	5	—	pF
Output Capacitance	C _O		—	7	—	
Power Supply Current (In Stop Mode)	I _{DDs}	V _{DD} = 2 V, no load, T _a = 25°C	—	0.2	5	μA
		No load	—	1	100	μA
Power Supply Current	I _{DD}	Crystal oscillation f = 4.194304 MHz, no load	—	6	12	mA

*1 Applied to P0, P1, P3, P4, P5, P6, P7 and P8.

*2 Applied to P2.

*3 Applied to OSC₀.

*4 Applied to RESET.

*5 Applied to OSC₁.


[查询"MSM6404"供应商](#)**AC Characteristics (MSM6404A)**(V_{DD} = 5 V ±10%, Ta = -40 to +85°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Clock (OSC ₀) Pulse Width	t _{φW}	—	119	—	—	ns
Cycle Time	t _{CY}	—	952	—	—	ns
Input Data Setup Time	t _{DS}	—	120	—	—	ns
Input Data Hold Time	t _{DH}	—	120	—	—	ns
SR/TM Clock Pulse Width	t _{WS} /t _{WT}	—	120	—	—	ns
CT Clock Pulse Width	t _{WC}	—	2/8 t _{CY} + 120	—	—	ns
P2 Input Data Clock Pulse Width	t _{WP}	—	120	—	—	ns
SR Data Setup Time	t _{SS}	—	120	—	—	ns
SR Data Hold Time	t _{SH}	—	120	—	—	ns
Data Delay Time	t _{DR}	C _L = 15 pF	—	—	t _{CY} + 300	ns
Data Delay Time at Mode Switching	t _{DCR}	C _L = 15 pF	—	—	7/8 t _{CY} + 300	ns
Data Delay Time at OPT Instruction	t _{DI1}	C _L = 15 pF	—	—	6/8 t _{CY} + 300	ns
Data Delay Time at OPT Instruction	t _{DI2}	C _L = 15 pF	—	—	7/8 t _{CY} + 300	ns
CT/TM Data Delay Time Using TBC Clock	t _{CT} /t _{TT}	C _L = 15 pF	—	—	2/8 t _{CY} + 360	ns
SR/TM Data Delay Time Using PORT Clock	t _{SR} /t _{TR}	C _L = 15 pF	—	—	t _{CY} + 480	ns
CT Data Delay Time Using PORT Clock	t _{CR}	C _L = 15 pF	—	—	10/8 t _{CY} + 480	ns
CT Data Delay Time Using External Clock	t _{CP}	C _L = 15 pF	—	—	2/8 t _{CY} + 360	ns
SR/TM Data Delay Time Using External Clock	t _{SP} /t _{TP}	C _L = 15 pF	—	—	360	ns
SR Clock Invalid Time	t _{SINH}	—	2/8 t _{CY}	—	—	ns
INT Invalid Time	t _{IINH}	—	1/8 t _{CY}	—	—	ns

[查询"MSM6404"供应商](#)


Timing Diagrams (MSM6404A)

Output Conditions

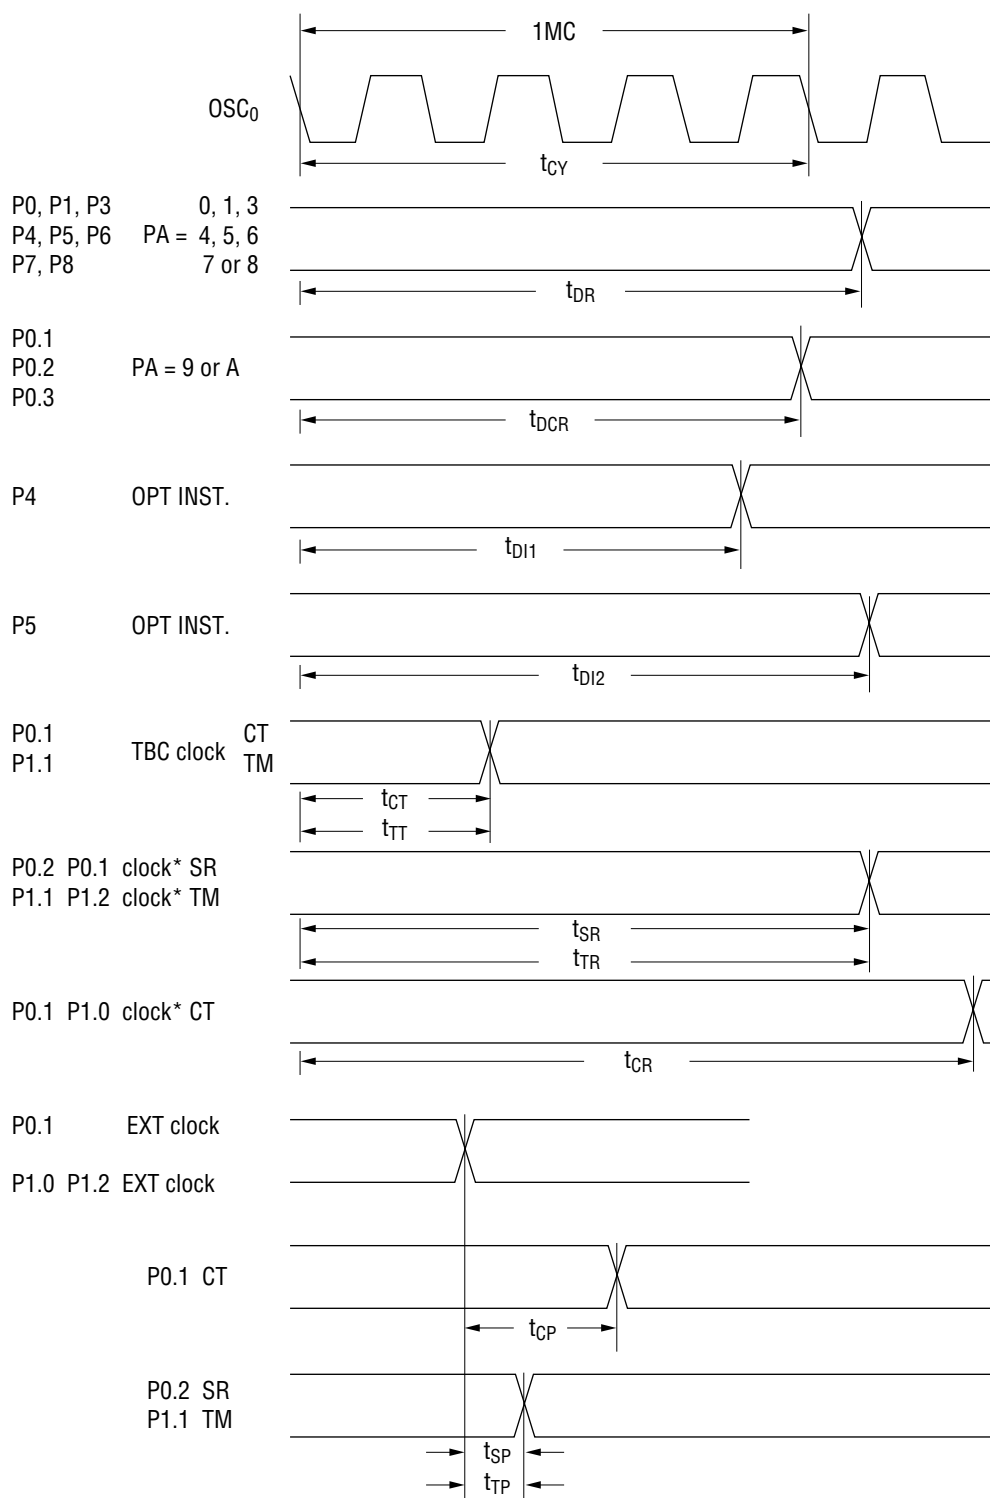

* Output data to port is clock for SR, TM or CT.

Input Conditions

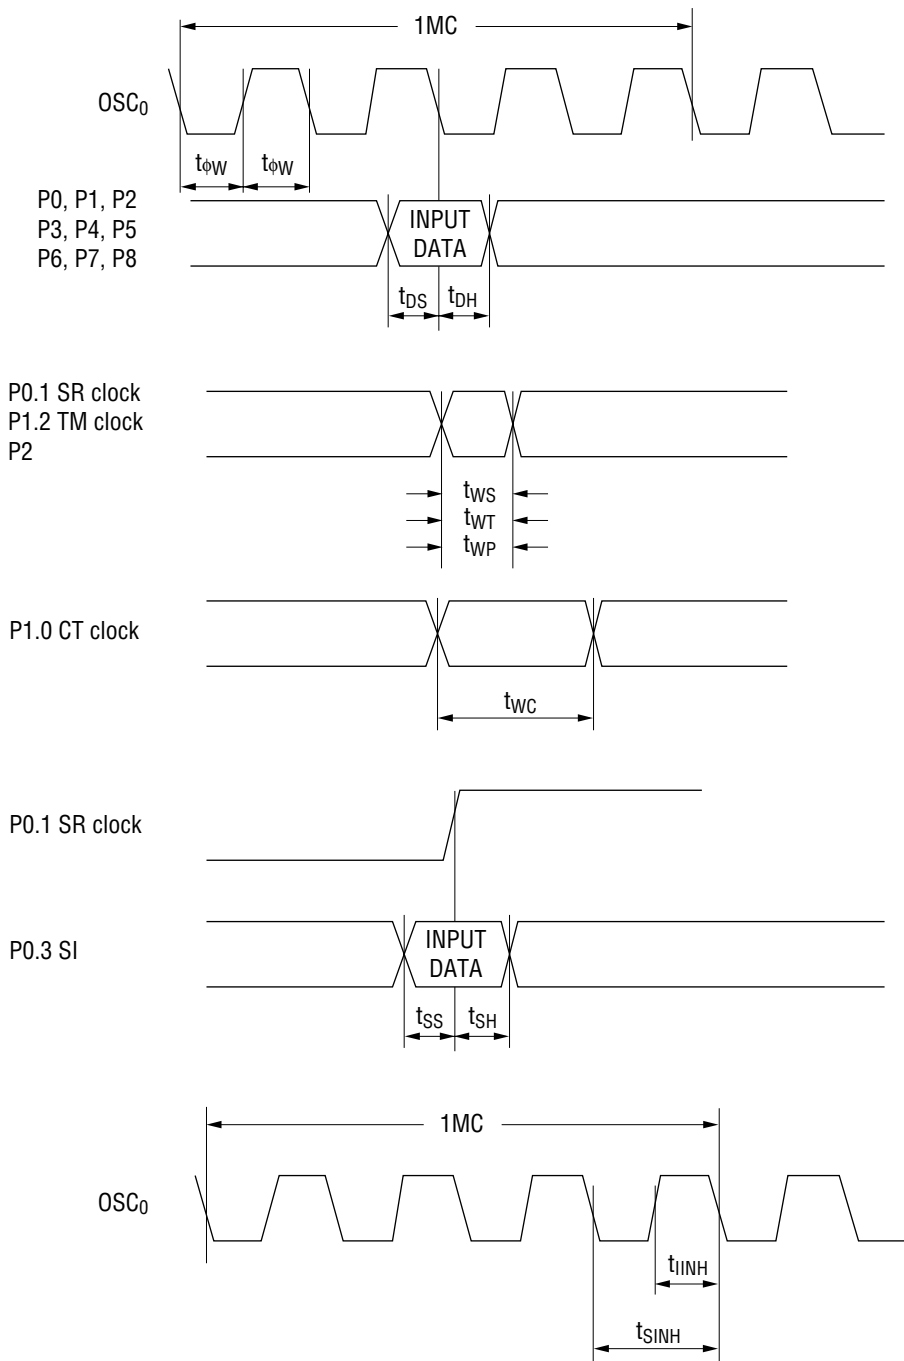


t_{SINH} : P0.1 (SR clock) INH period during LMSR INST.
(Note : P0.1 is used for clock of SR.)

t_{IINH} : P2.0 (interrupt) INH period during RPB and RPBD INST.


[查询"MSM6404"供应商](#)

Operating Characteristics (MSM6404A)


Current (I_{OH}) vs Voltage (V_{OH}) for High State Output

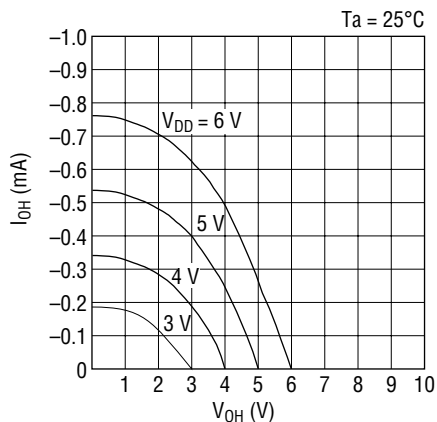


Current (I_{OL}) vs Voltage (V_{OL}) for Low State Output

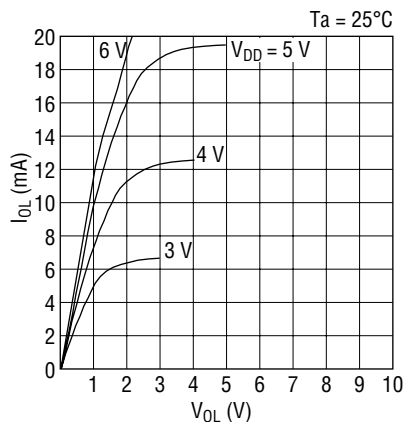


Maximum Clock Frequency (f_{OSC}) vs Supply Voltage (V_{DD})

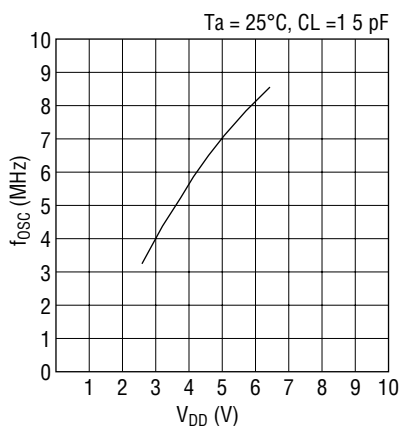

Supply Current (I_{DD}) vs Supply Voltage (V_{DD})

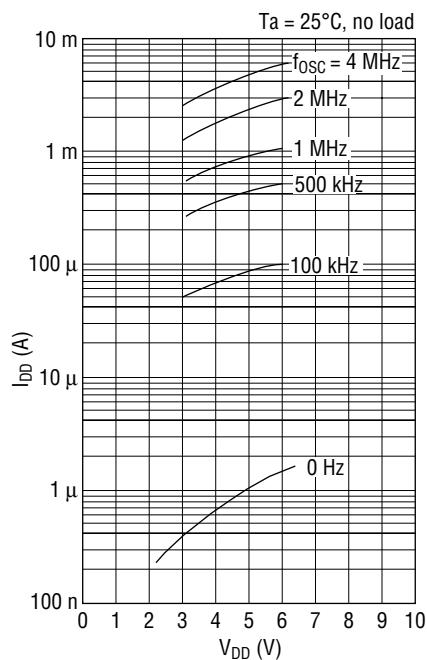

Maximum Clock Frequency (f_{OSC}) vs Temperature (T_a)

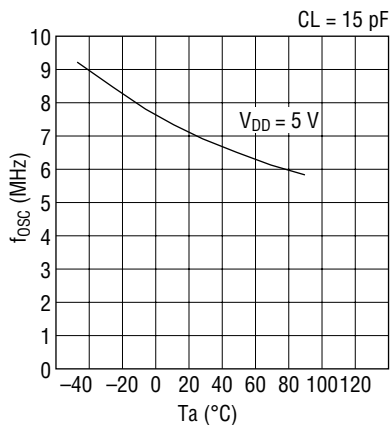

[查询"MSM6404"供应商](#)
ABSOLUTE MAXIMUM RATINGS (MSM6404VS)

Parameter	Symbol	Condition	Rating	Unit
Power Supply Voltage	V_{DD}	$T_a = 25^{\circ}\text{C}$	-0.3 to +7	V
Input Voltage	V_I		-0.3 to V_{DD}	V
Output Voltage	V_O		-0.3 to V_{DD}	V
Power Dissipation	P_D	$T_a = 25^{\circ}\text{C}$ per package	200 max.	mW
		$T_a = 25^{\circ}\text{C}$ per output	50 max.	mW
Storage Temperature	T_{STG}	—	-55 to +150	$^{\circ}\text{C}$

RECOMMENDED OPERATING CONDITIONS (MSM6404VS)

Parameter	Symbol	Condition	Range	Unit
Power Supply Voltage	V_{DD}	$f_{osc} \leq 1 \text{ MHz}$	3 to 6	V
		$f_{osc} \leq 4.2 \text{ MHz}$	4.75 to 5.25	V
Data-Hold Voltage	V_{DDH}	$f_{osc} = 0 \text{ Hz}$	2 to 6	V
Operating Temperature	T_{op}	—	0 to +40	$^{\circ}\text{C}$
Fan Out	N	MOS load	15	—
		LSTTL load	1	

[查询"MSM6404"供应商](#)

ELECTRICAL CHARACTERISTICS (MSM6404VS)

DC Characteristics

(V_{DD} = 5 V ±5%, T_a = 0 to +40°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
"H" Input Voltage*1, *2	V _{IH}	—	3.6	—	V _{DD}	V
"H" Input Voltage*3, *4	V _{IH}	—	3.6	—	V _{DD}	V
"L" Input Voltage	V _{IL}	—	-0.3	—	+0.8	V
"H" Output Voltage*1, *5	V _{OH}	I _O = -15 μA	4.2	—	—	V
"L" Output Voltage*1	V _{OL}	I _O = 0.4 mA	—	—	0.4	V
"L" Output Voltage*5	V _{OL}	I _O = 15 μA	—	—	0.4	V
Input Current*3	I _{IH} /I _{IL}	V _I = V _{DD} /0 V	—	—	15/-15	μA
Input Current*2, *4	I _{IH} /I _{IL}	V _I = V _{DD} /0 V	—	—	1/-30	μA
"H" Output Current*1	I _{OH}	V _O = 2.4 V	-0.1	—	—	mA
"H" Output Current*1	I _{OH}	V _O = 0.4 V	—	—	-1.2	mA
Input Capacitance	C _I	f = 1 MHz, T _a = 25°C	—	5	—	pF
Output Capacitance	C _O		—	7	—	
Power Supply Current*6 (In Stop Mode)	I _{DD}	V _{DD} = 2 V, no load, T _a = 25°C	—	1	5	μA
		No load	—	10	100	μA
Power Supply Current*6	I _{DD}	Crystal oscillation f = 4.2 MHz, no load	—	6	12	mA

*1 Applied to P0, P1, P3, P4, P5, P6, P7 and P8.

*2 Applied to P2.

*3 Applied to OSC₀.

*4 Applied to RESET.

*5 Applied to OSC₁.

*6 The EPROM current is not included.


[查询"MSM6404"供应商](#)
AC Characteristics (MSM6404VS)(V_{DD} = 5 V ±5%, T_a = 0 to +40°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Clock (OSC ₀) Pulse Width	t _{φW}	—	119	—	—	ns
Cycle Time	t _{CY}	—	952	—	—	ns
Input Data Setup Time	t _{DS}	—	120	—	—	ns
Input Data Hold Time	t _{DH}	—	120	—	—	ns
SR/TM Clock Pulse Width	t _{WS} /t _{WT}	—	120	—	—	ns
CT Clock Pulse Width	t _{WC}	—	2/8 t _{CY} + 120	—	—	ns
P2 Input Data Clock Pulse Width	t _{WP}	—	120	—	—	ns
SR Data Setup Time	t _{SS}	—	120	—	—	ns
SR Data Hold Time	t _{SH}	—	120	—	—	ns
Data Delay Time	t _{DR}	C _L = 15 pF	—	—	t _{CY} + 300	ns
Data Delay Time at Mode Switching	t _{DCR}	C _L = 15 pF	—	—	7/8 t _{CY} + 300	ns
Data Delay Time at OPT Instruction	t _{DI1}	C _L = 15 pF	—	—	6/8 t _{CY} + 300	ns
Data Delay Time at OPT Instruction	t _{DI2}	C _L = 15 pF	—	—	7/8 t _{CY} + 300	ns
CT/TM Data Delay Time Using TBC Clock	t _{CT} /t _{TT}	C _L = 15 pF	—	—	2/8 t _{CY} + 360	ns
SR/TM Data Delay Time Using PORT Clock	t _{SR} /t _{TR}	C _L = 15 pF	—	—	t _{CY} + 480	ns
CT Data Delay Time Using PORT Clock	t _{CR}	C _L = 15 pF	—	—	10/8 t _{CY} + 480	ns
CT Data Delay Time Using External Clock	t _{CP}	C _L = 15 pF	—	—	2/8 t _{CY} + 360	ns
SR/TM Data Delay Time Using External Clock	t _{SP} /t _{TP}	C _L = 15 pF	—	—	360	ns
SR Clock Invalid Time	t _{SINH}	—	2/8 t _{CY}	—	—	ns
INT Invalid Time	t _{IINH}	—	1/8 t _{CY}	—	—	ns

[查询"MSM6404"供应商](#)


Timing Diagrams (MSM6404VS)

Output Conditions

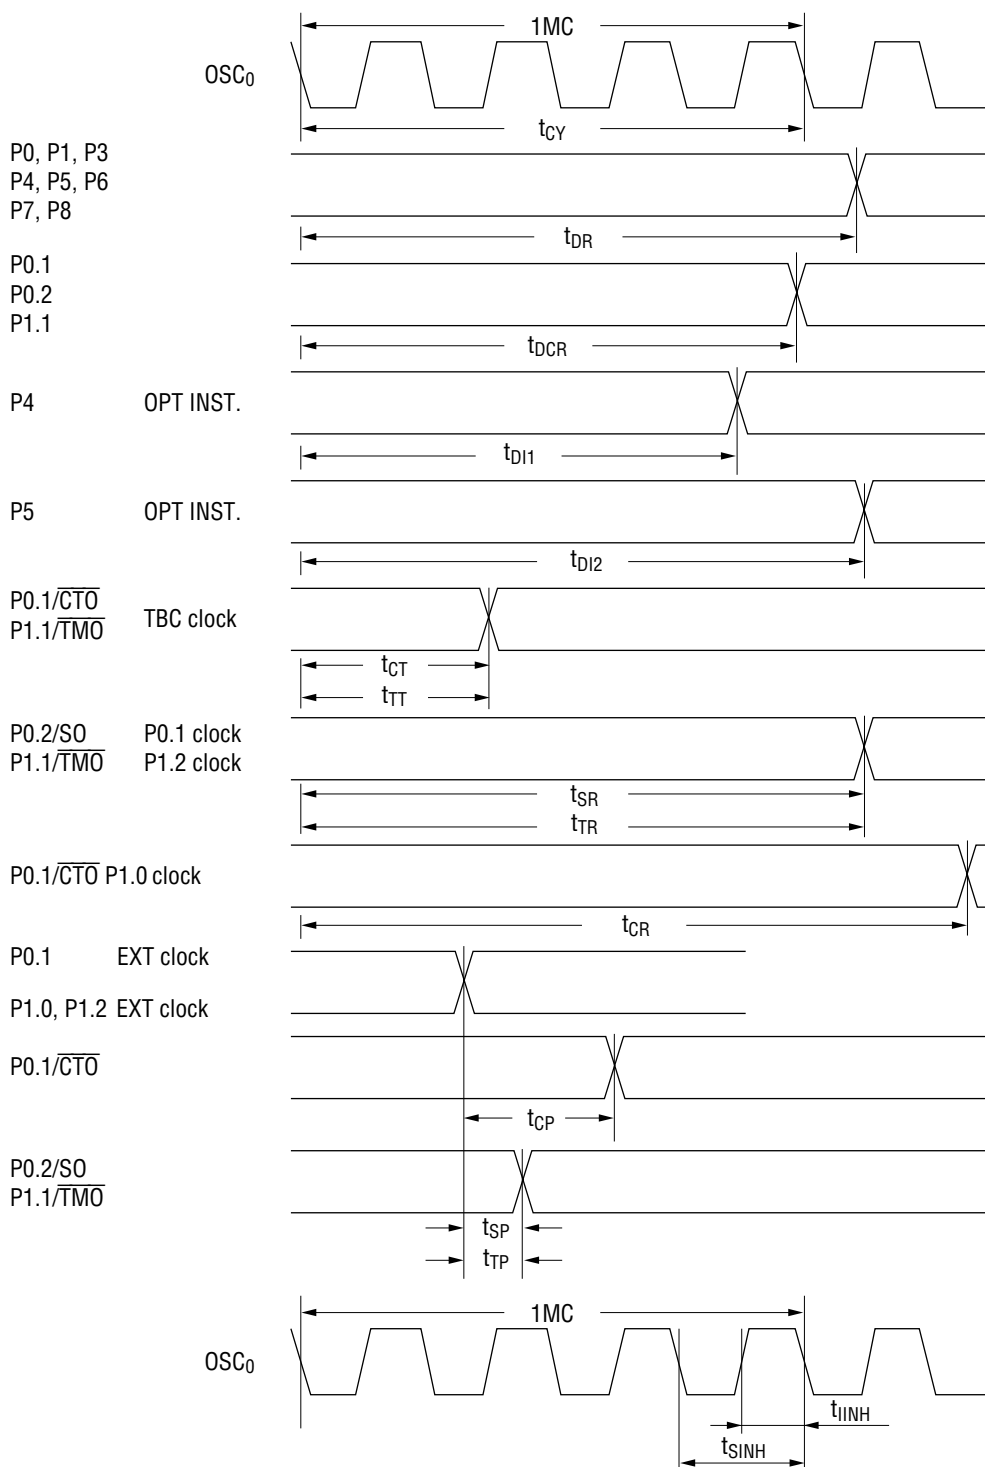
 t_{SINH} : $P0.1/\overline{SCK}$ inhibit period during LMSR INST.

 t_{IINH} : $P2.0/\overline{INT}$ inhibit period during RPB and RPSD INST.


Input Conditions

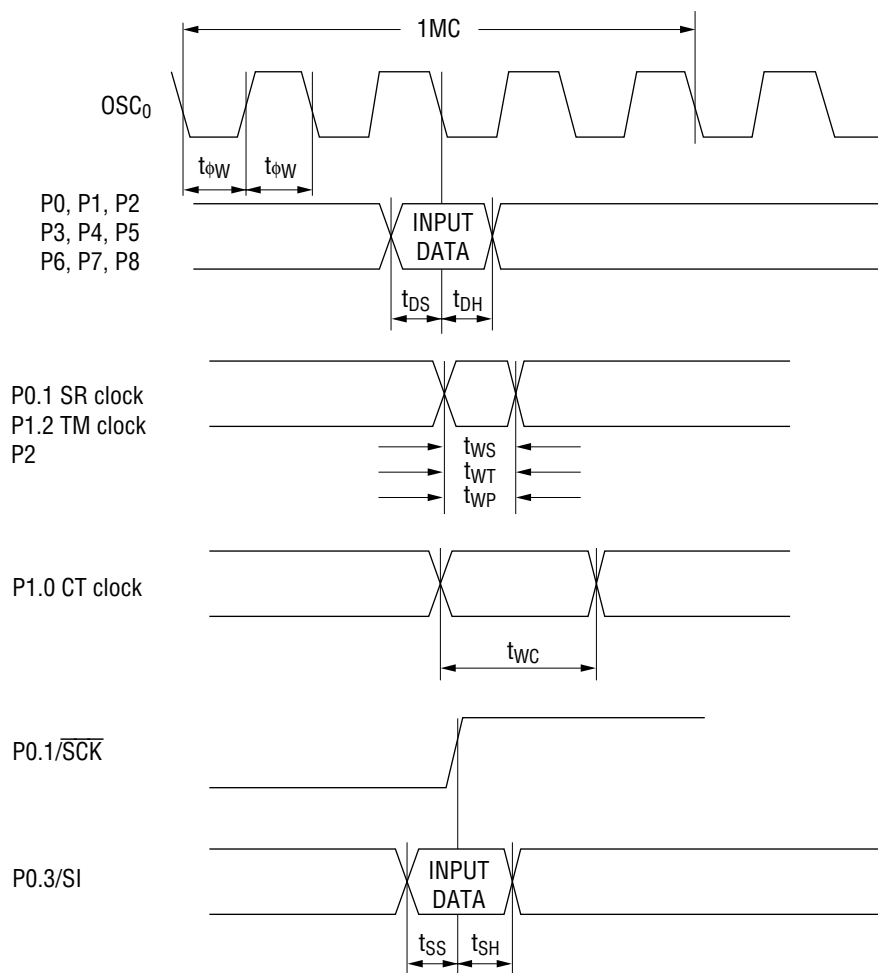


[查询"MSM6404"供应商](#)

Operating Characteristics (MSM6404VS)


Current (I_{OH}) vs Voltage (V_{OH}) for High State Output

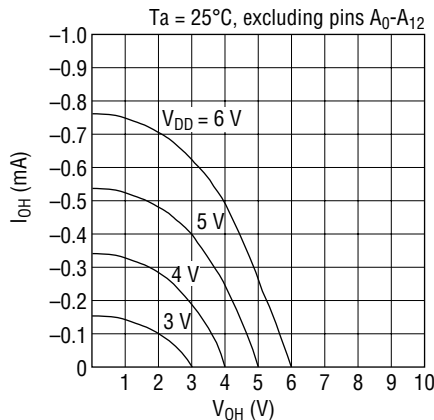


Current (I_{OL}) vs Voltage (V_{OL}) for Low State Output

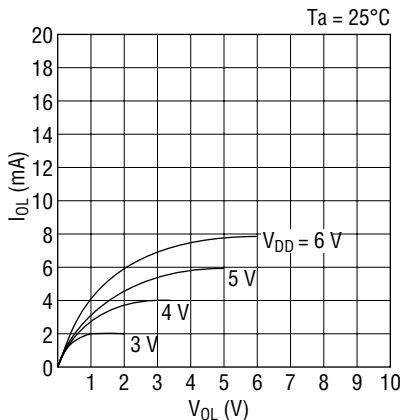


Maximum Clock Frequency (f_{OSC}) vs Supply Voltage (V_{DD})

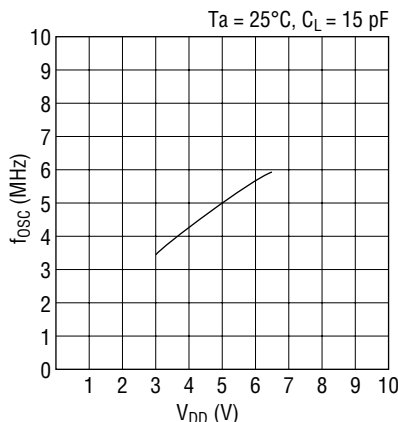

Supply Current (I_{DD}) vs Supply Voltage (V_{DD})

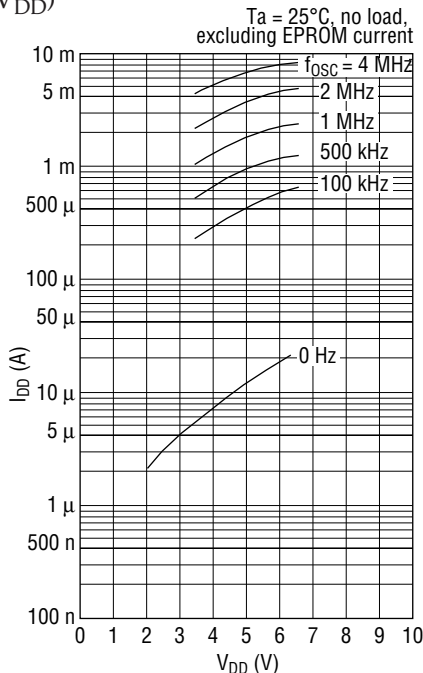

Maximum Clock Frequency (f_{OSC}) vs Temperature (T_a)

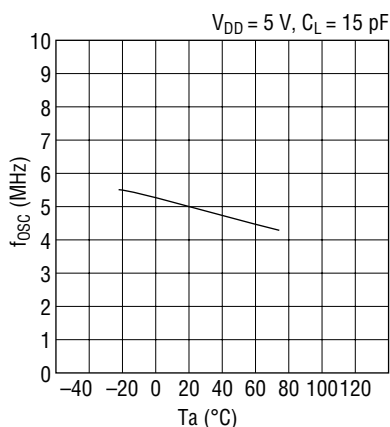


[查询"MSM6404"供应商](#)


FUNCTIONAL DESCRIPTION

MSM6404VS Interface to EPROM

EPROM insertion method

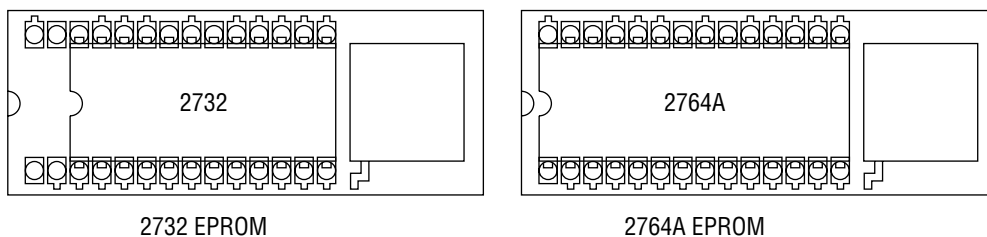









EPROM read timing

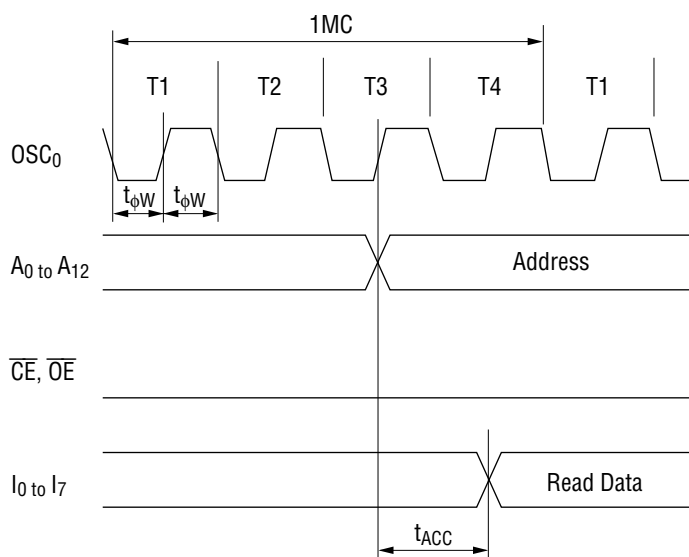

Use EPROM with t_{ACC} of less than 357 ns.

Read data is read into the instruction register in the first half of the T1 state.


[查询"MSM6404"供应商](#)**Differences between MSM6404A and MSM6404VS (PIGGYBACK)**

Item	MSM6404A	MSM6404VS (Piggyback)
1. Port initialization during reset	Ports P0, 1, 3 are set to "1" and ports P2, 4, 5, 6, 7, 8 are reset to "0" directly by the reset input signal.	Ports P0, 1, 3 are set to "1" and ports P2, 4, 5, 6, 7, 8 are initialized during reset cycle.
2. Timer operation	After being reset, the timer continues to stop until data is set in it.	It is undefined whether the timer starts or not after being reset. Therefore, the timer should be initialized by software.
3. Shift register	Serial out F/F (SOF/F) is set to "0" after being reset.	It is undefined whether serial out F/F (SOF/F) is "0" or "1" after being reset. Therefore the serial out F/F should be initialized by software.
4. Port input/output timing	Internal clock  Input	Internal clock  Input
	Internal clock  Output	Internal clock  Output
5. Port input/output characteristics	TTL F0 = "1" ($I_{OL} = 1.6 \text{ mA @ } 0.4 \text{ V}$)	LSTTL F0 = "1" ($I_{OL} = 0.4 \text{ mA @ } 0.4 \text{ V}$)
	P2.0-3 	P2.0-3 
	TTL compatible input P0.0-P8.3 (Except P2.0-3) 	CMOS input P0.0-P8.3 (Except P2.0-3) 
6. Available ROM capacity	Up to 4 Kbytes	Up to 8 Kbytes accessible
7. LJP a ₁₃ , LCAL a ₁₃ instruction	Not available	Available

[查询"MSM6404"供应商](#)


PACKAGE DIMENSIONS

(Unit : mm)

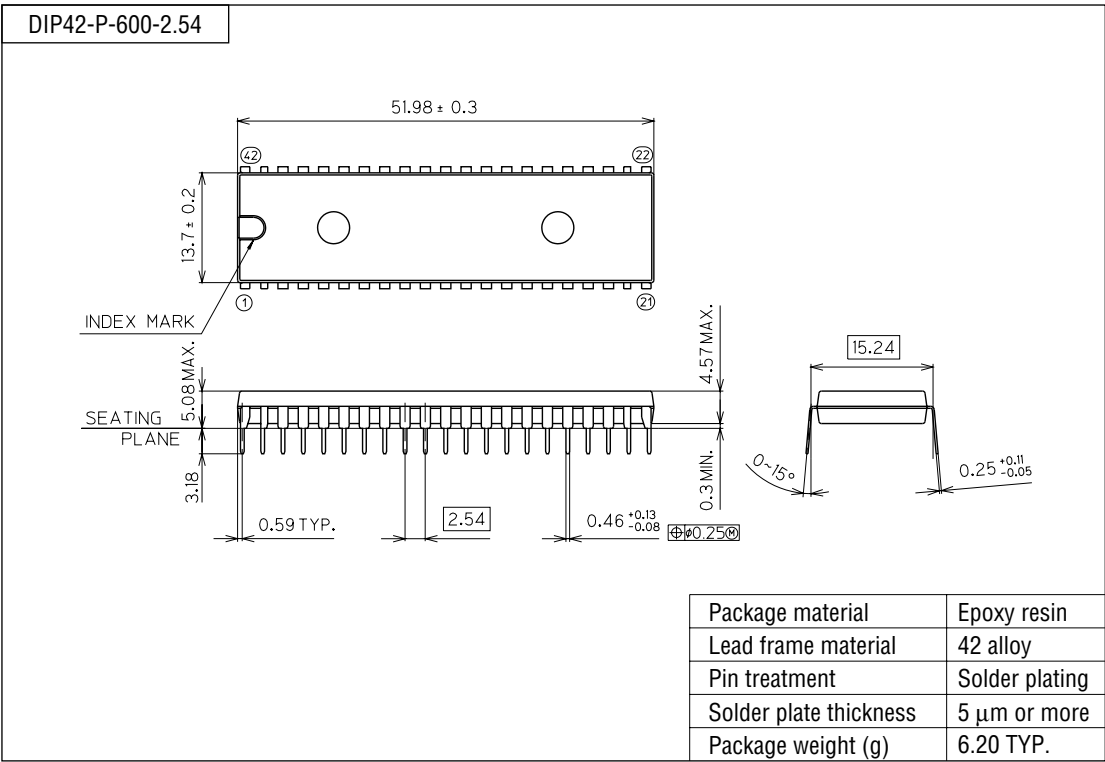

[查询"MSM6404"供应商](#)

(Unit : mm)

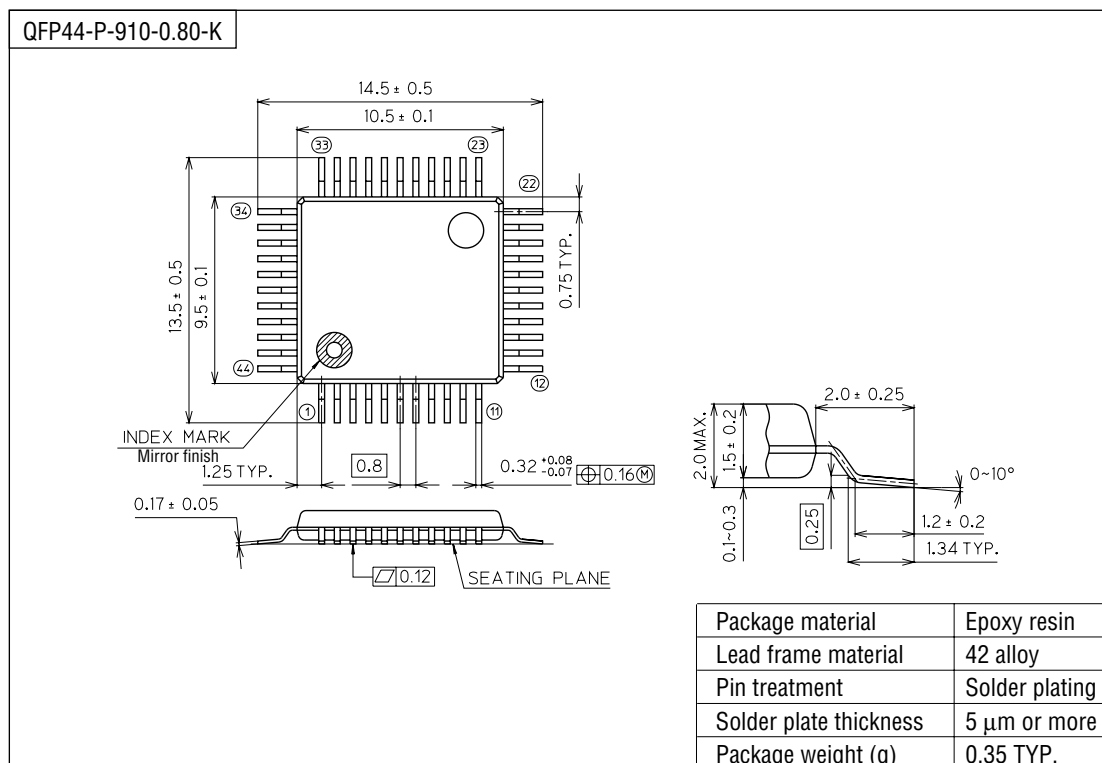


Notes for Mounting the Surface Mount Type Package

The SOP, QFP, TSOP, SOJ, QFJ (PLCC), SHP and BGA are surface mount type packages, which are very susceptible to heat in reflow mounting and humidity absorbed in storage.

Therefore, before you perform reflow mounting, contact Oki's responsible sales person for the product name, package name, pin number, package code and desired mounting conditions (reflow method, temperature and times).

(Unit : mm)

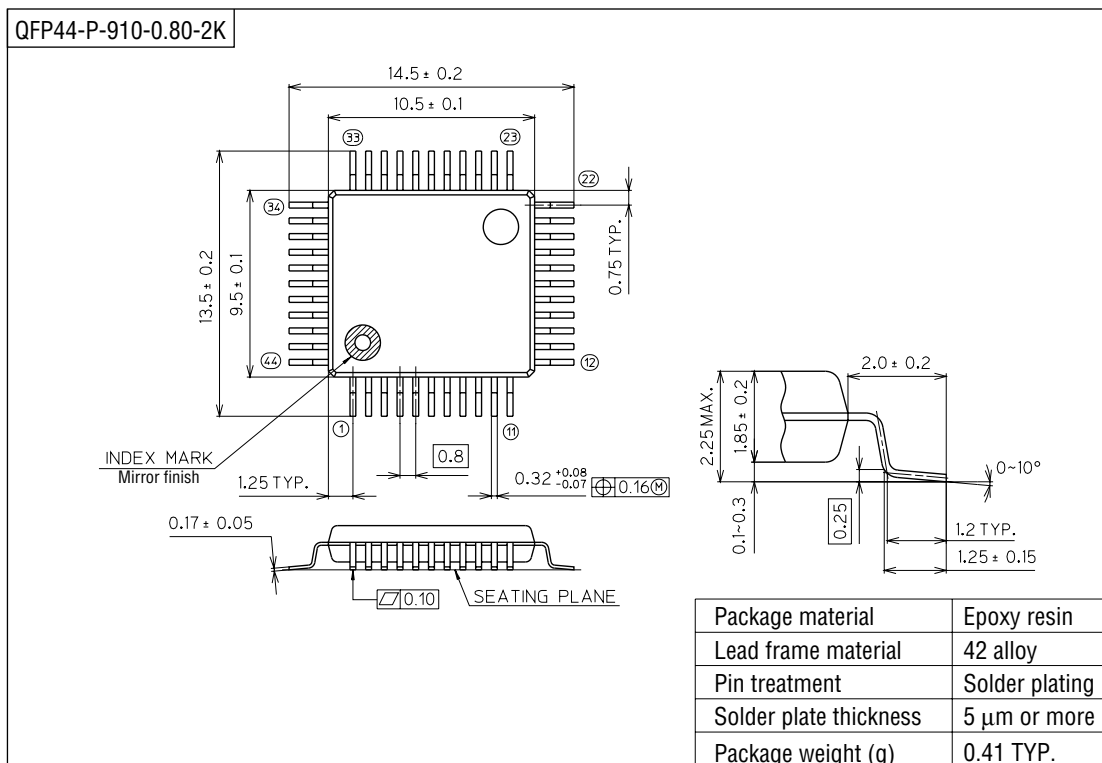

Notes for Mounting the Surface Mount Type Package

The SOP, QFP, TSOP, SOJ, QFJ (PLCC), SHP and BGA are surface mount type packages, which are very susceptible to heat in reflow mounting and humidity absorbed in storage.

Therefore, before you perform reflow mounting, contact Oki's responsible sales person for the product name, package name, pin number, package code and desired mounting conditions (reflow method, temperature and times).

[查询"MSM6404"供应商](#)

(Unit : mm)

