


**Model 2484**  
**Stacking Banana Plug Each End**  
**On Retractable (Coiled) Cord**

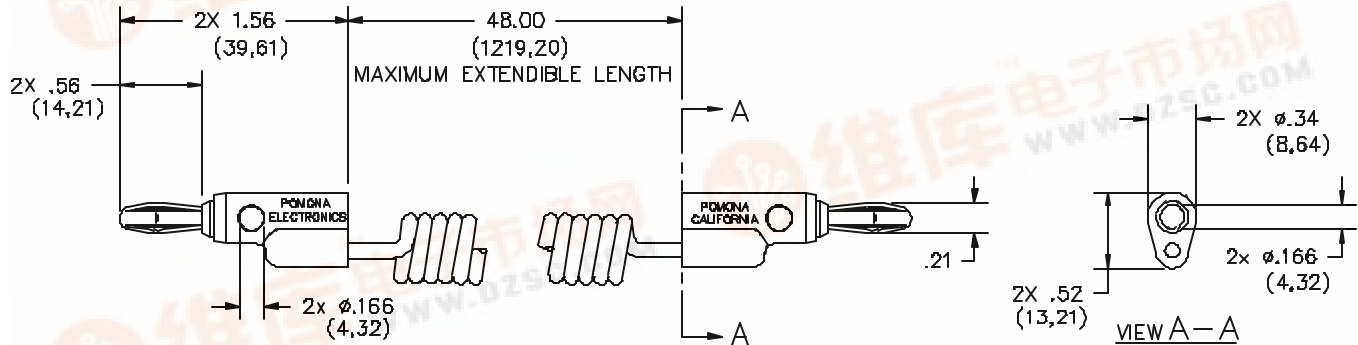

**FEATURES:**

- Cross stacking and vertical stacking on both ends.
- Mates to model #1581, 2854 or any standard banana jack.

**MATERIALS:**

Conn: Standard Stacking Banana Plug

Material: Spring - Beryllium Copper per QQ-C-533, Alloy 172, cond. HT.

Plug Body – Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches.

Insulation: Polypropylene molded to plug body and wire.

Color: Matches color of wire.

Retractable Cord: 20 AWG, stranding 42 x 36 t.c., PVC insulated, 3.71 (.146) O.D.

Color: See Ordering Information.

**RATINGS:**

Operating Temperature: +55°C. (+131°F.) Max.

Operating Voltage: Hand-held testing: 30 VAC/60VDC Max.

Hands free testing in controlled voltage environments: 270 VDC Max.

Current: 5 Amperes

**ORDERING INFORMATION: Model 2484-\***

\*= Color, -0 Black, -2 Red

Ordering Example: 2484-2 Adapter Color is Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

6/9/99

SY/EHLS

S:\Engineering\Release\DataSheets\FI\ukeDataSheet\2484\_1\_01.doc

Sales: 800-490-2361 Fax: 888-403-3360

Technical Assistance: 800-241-2060

PomonaACCESS 90557 (800) 444-6785 or (425) 446-6010

More drawings available at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

Page 1 of 1

