



2-line filters IEC inlet filters

250 V DC/AC, 50/60 Hz, 1 ... 10 A, 40 °C

Ordering code:

B84776* A000

Date:

2009-11-20

Version:

05

2-line filters**B84776* A000****IEC inlet filters****Construction**

- 2-line filter with IEC connector, fuse holder and switch
- Appliance connector according to IEC/EN 60320-1
- Fuse holder for 2 fuses Ø 5 x 20 mm
- Metal case
- 2-pole rocker switch

Versions

- Standard version (B84776A*)
- Medical version with low leakage current (B84776M*)

Features

- Easy to install
- Compact design
- Cost optimized construction
- Degree of protection from front side IP 40 ¹⁾
- Design complies with IEC / EN 60939, UL 1283, CSA 22.2 No.8


Applications

- Switched-mode power supplies for
 - industrial electronics
 - telecom systems
 - data systems
- DC applications
- Measuring instruments
- Medical engineering


Terminals

- Line side: IEC inlet C14 according to IEC/EN 60320-1
- Load side: Tab connectors 6.3 x 0.8 mm

Typical circuit diagram of B84776A*A000 (standard version)

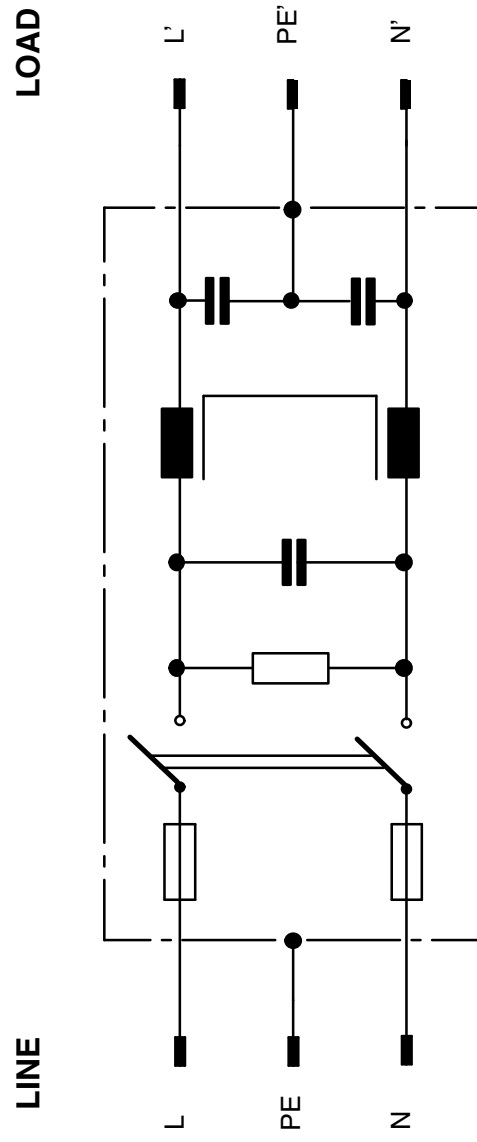

Typical circuit diagram of B84776M*A000 (medical version)

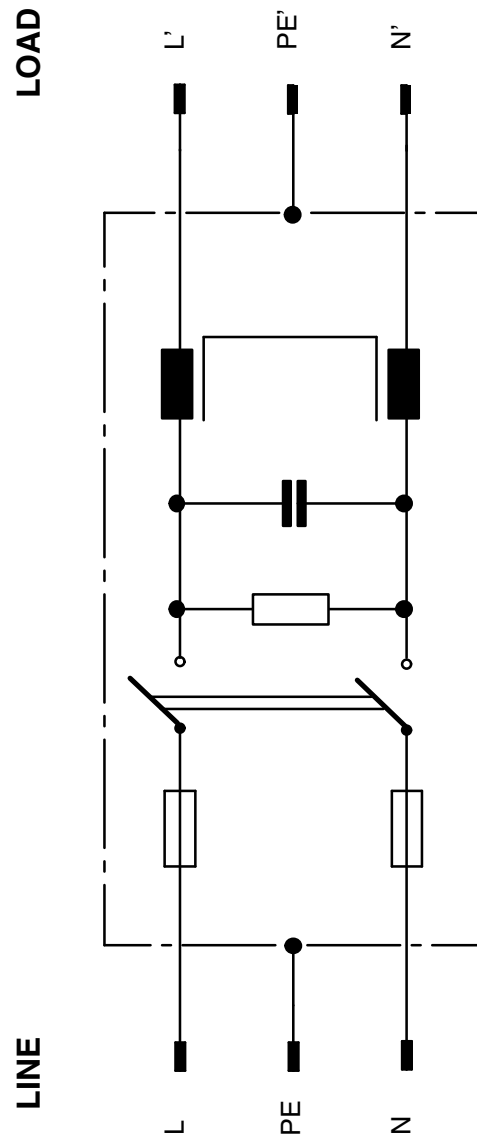



2-line filters	B84776*A000
IEC inlet filters	

Technical data and measuring conditions of B84776*A000

Rated voltage	U _R	250	V DC/AC
Rated frequency	f _R	50/60	Hz
Test voltage line to line for 2 s	U _{test}	760	V AC
Test voltage line to case for 2 s (B84776A*)	U _{test}	2000	V AC
Test voltage line to case for 2 s (B84776M*)	U _{test}	2500	V AC
Rated temperature	T _R	40	°C
Climatic category (IEC 60068-1)		25/085/21	
Rocker switch	Rating	10 A (1/2 HP) / 250 VAC	
	Inrush current	82	A
	Electrical lifetime ON-OFF	10000	cycles
	Mechanical lifetime ON-OFF	50000	cycles

2-line filters	B84776*A000
IEC inlet filters	



Characteristics and ordering codes of B84776*A000

I _R	C _R	L _R	I _{leak} ²⁾	R _{bleed}	Approx. weight	Ordering code	Approvals		
									
A	X2 μF	Y2 nF	mA	MΩ	g				
1	1x0.22 1x0.22	2x2.2 –	2x7.6 2x7.6	0.173 0	1 1	B84776A0001A000 B84776M0001A000	+	+	+
2	1x0.22 1x0.22	2x2.2 –	2x2.0 2x2.0	0.173 0	1 1	B84776A0002A000 B84776M0002A000	+	+	+
4	1x0.22 1x0.22	2x2.2 –	2x1.0 2x1.0	0.173 0	1 1	B84776A0004A000 B84776M0004A000	+	+	+
6	1x0.22 1x0.22	2x2.2 –	2x0.46 2x0.46	0.173 0	1 1	B84776A0006A000 B84776M0006A000	+	+	+
10	1x0.22 1x0.22	2x2.2 –	2x0.33 2x0.33	0.173 0	1 1	B84776A0010A000 B84776M0010A000	+	+	+

+ = approval will be requested

2) Calculation according draft proposal IEC 60939–1 Ed. 3 (2008–10–29), annex A, "Calculation of leakage current".
In practice are up to double values to be expected due to the insulation resistance values of the used ceramic capacitors. For the medical version results computationally the value 0. In practice are values 1 ... 2 μA to be expected due to the insulation resistance values of the used ceramic capacitors.

Dimensional drawing

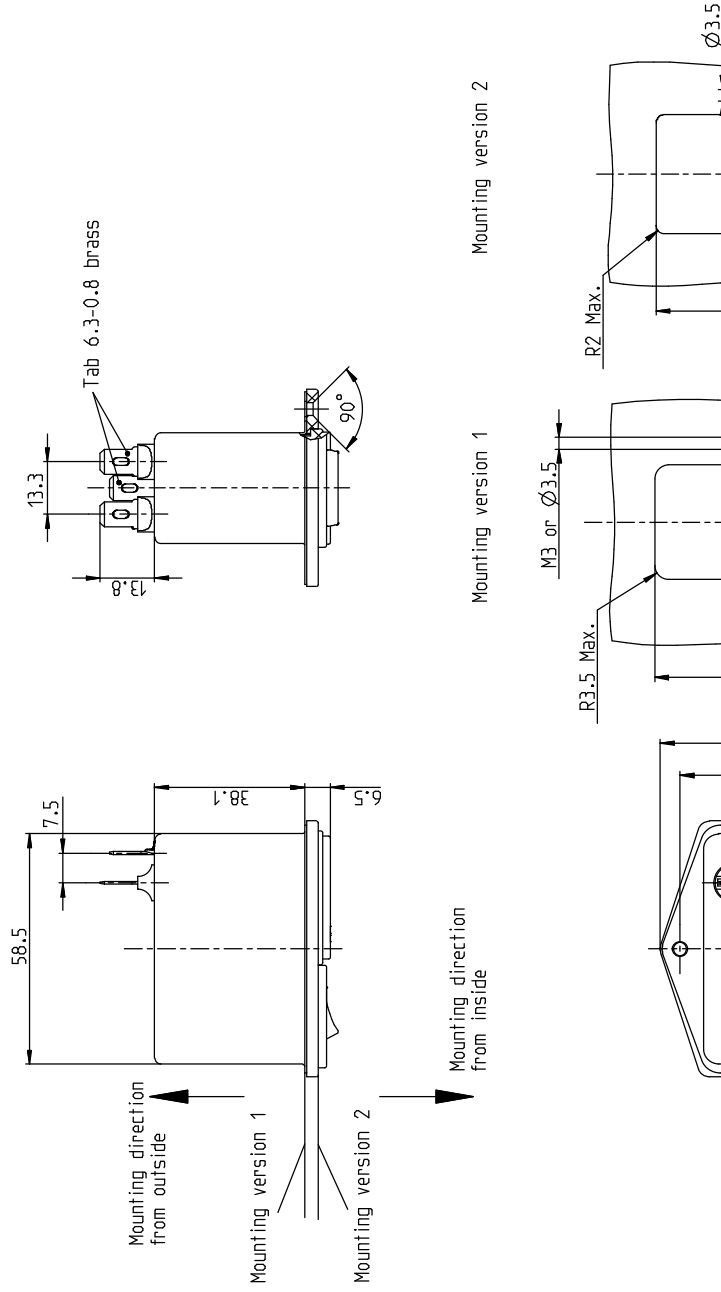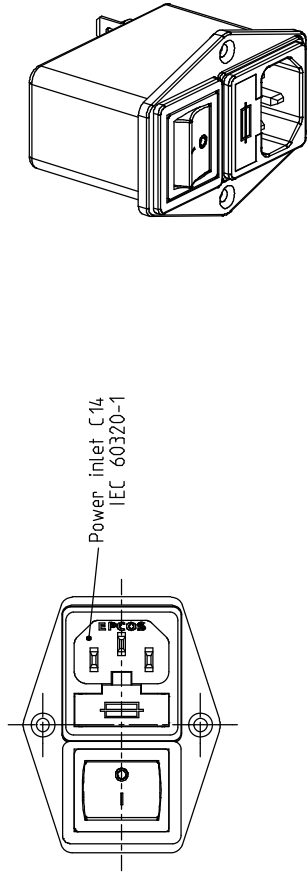






2-line filters

IEC inlet filters

B84776*A000

Insertion loss (typical values at Z = 50 Ω)

- unsymmetrical, adjacent branches terminated
- - - common mode, all branches in parallel (asymmetrical)
- - - differential mode (symmetrical)

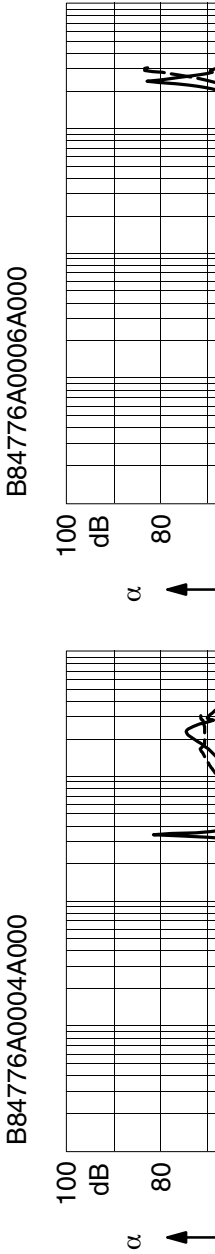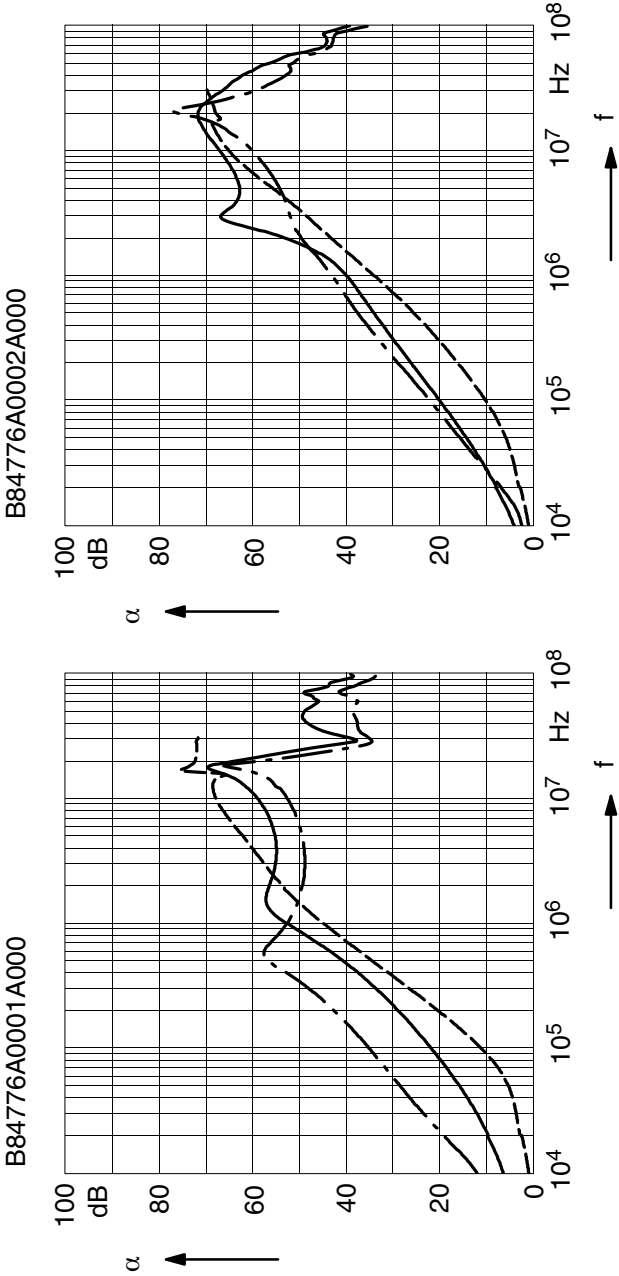




2-line filters	B84776*A000
IEC inlet filters	

Insertion loss (typical values at $Z = 50\ \Omega$)

- unsymmetrical, adjacent branches terminated
- - - common mode, all branches in parallel (asymmetrical)
- - - differential mode (symmetrical)


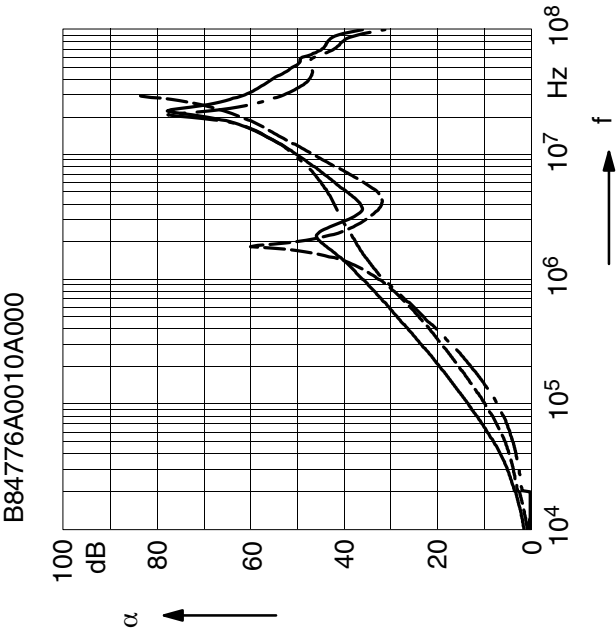




2-line filters	B84776*A000
IEC inlet filters	

Insertion loss (typical values at $Z = 50\ \Omega$)


- unsymmetrical, adjacent branches terminated
- - - common mode, all branches in parallel (asymmetrical)
- - - differential mode (symmetrical)

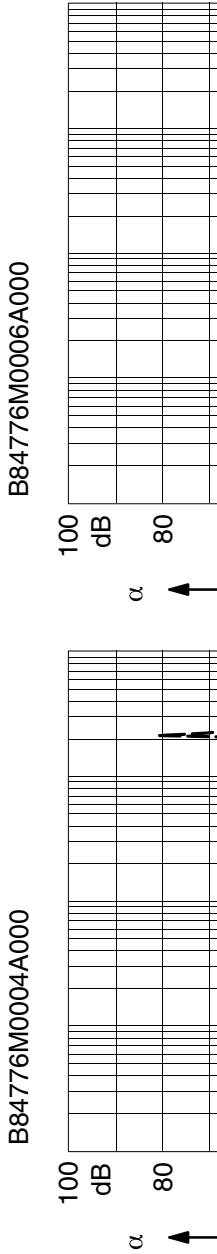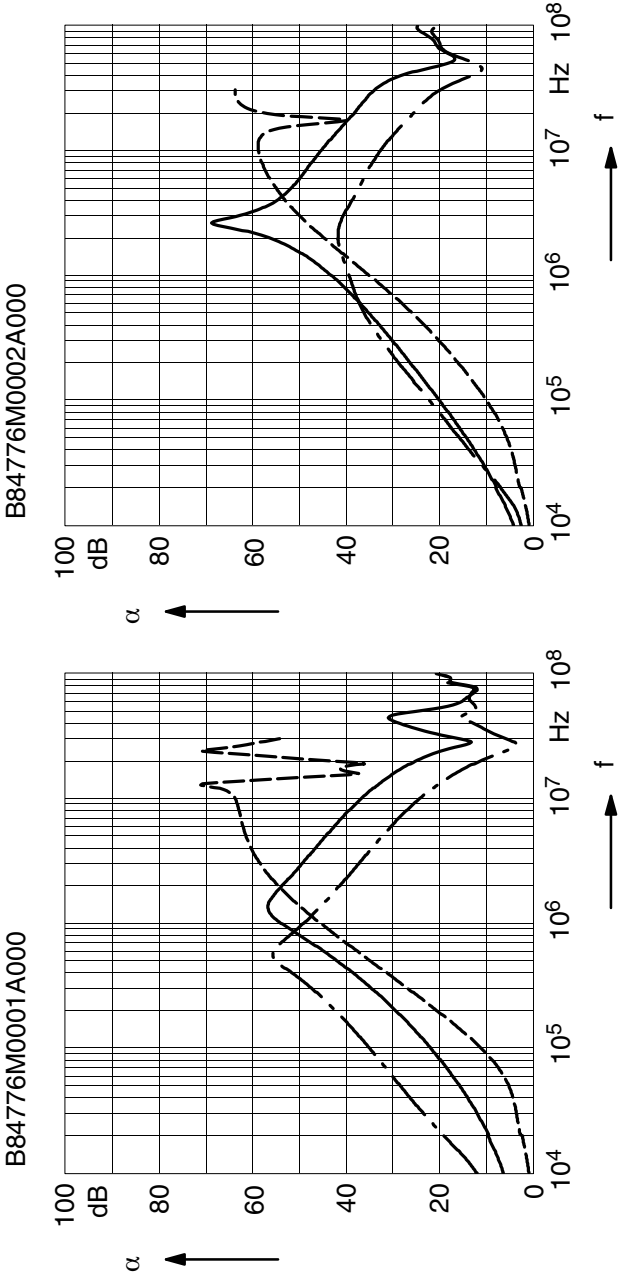



Insertion loss (typical values at $Z = 50\ \Omega$)

- unsymmetrical, adjacent branches terminated
- - - common mode, all branches in parallel (asymmetrical)
- - - differential mode (symmetrical)

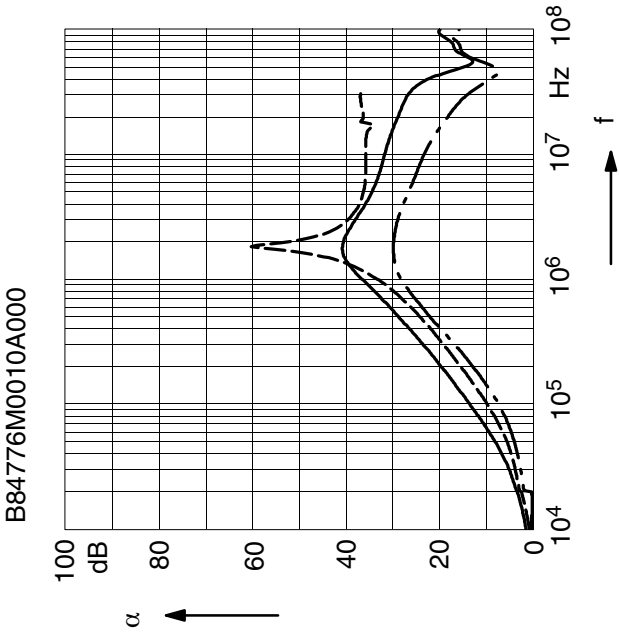

Caution and warnings

- Please note the advices in our data book "EMC Filters" (latest edition); attention should be paid to the chapter "General safety notes".
- It shall be ensured that only qualified persons (electricity specialists) are engaged on work such as planning, assembly, installation, operation, repair and maintenance. They must be provided with the corresponding documentation.
- Danger of electric shock. EMC filters contain components that store an electric charge. Dangerous voltages can continue to exist at the filter terminals for longer than five minutes even after the power has been switched off.
- The protective earth connections shall be the first to be made when the EMC filter is installed and the last to be disconnected. Depending on the magnitude of the leakage currents, the particular specifications for making the protective-earth connection must be observed.
- Impermissible overloading of the EMC filter, such as with circuits able to cause resonances, impermissible voltages at higher frequencies etc. can lead to bodily injury and death as well as cause substantial material damages (e.g. destruction of the filter housing).
- EMC filters must be protected in the application against impermissible exceeding of the rated currents by overcurrent protective.
- In case of leakage currents $> 3.5 \text{ mA}$ you shall mount the PE conductor stationary with the required cross section before beginning of operation and save it against disconnecting. For leakage currents $I_L^{4)} < 10 \text{ mA}$ the PE conductor must have a KU value ³⁾ of 4.5; for leakage currents $I_L \geq 10 \text{ mA}$ the PE conductor must have a KU value of 6.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before end of their usual service life time cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn