

## DisplayPort 1:1 Buffer

### FEATURES

- Supports Data Rates up to 2.7 Gbps
- Supports Dual-Mode DisplayPort
- Output Waveform Mimics Input Waveform Characteristics
- Enhanced ESD: 12 KV on all pins
- Enhanced Commercial Temperature Range: 0°C to 85°C
- 36 Pin 6 × 6 QFN Package

### APPLICATIONS

- Personal Computer Market
  - Desktop PC
  - Notebook PC
  - Docking Station
  - Standalone Video Card


### DESCRIPTION

The SN75DP118 is a one Dual-Mode DisplayPort input to one Dual-Mode DisplayPort output. The output follows the input signal in a manner that provides the highest level of signal integrity while supporting the EMI benefits of spread spectrum clocking. The SN75DP118 data rates of up to 2.7 Gbps through each link for a total throughput of up to 10.8 Gbps can be realized.

In addition to the DisplayPort high speed signal lines, the SN75DP118 also supports the Hot Plug Detect (HPD) and Cable Adapter Detect (CAD) channels.

The SN75DP118 is characterized for operation over ambient air temperature of 0°C to 85°C.

### TYPICAL APPLICATION

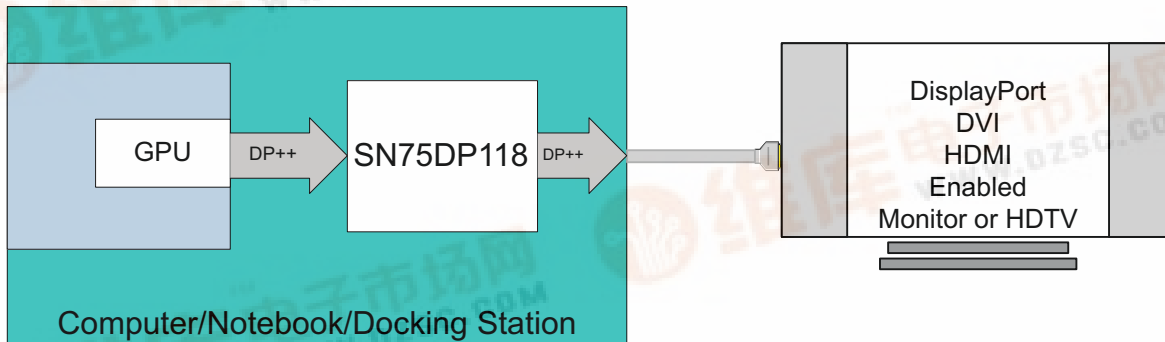

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.


Copyright © 2008–2009, Texas Instruments Incorporated






These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## DATA FLOW BLOCK DIAGRAM

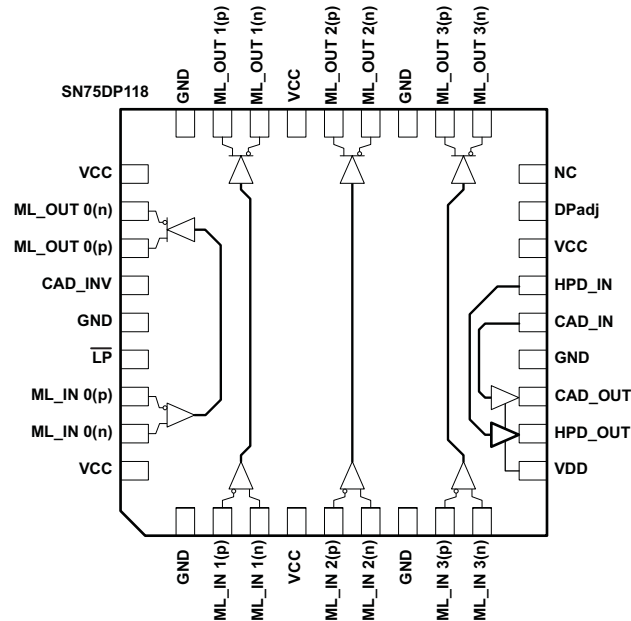

## PACKAGE

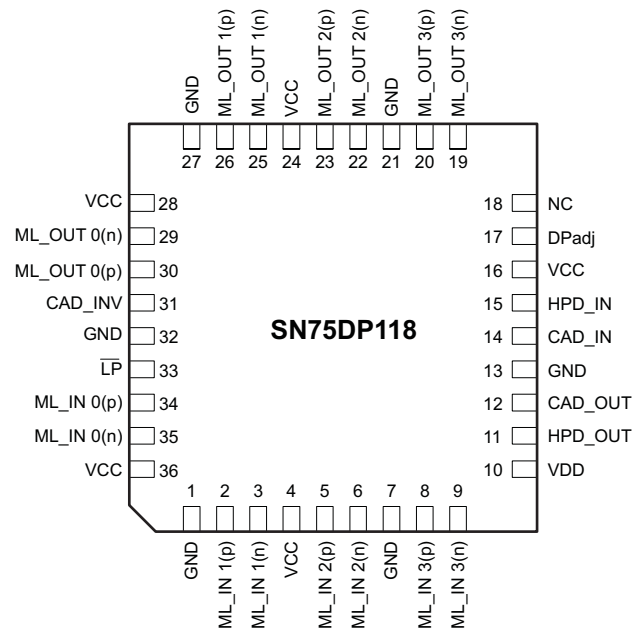

## PIN FUNCTIONS

PIN		I/O	DESCRIPTION
SIGNAL	NO.		
MAIN LINK INPUT PINS			
ML_IN 0	34, 35	I	DisplayPort Main Link Channel 0 Differential Input
ML_IN 1	2, 3	I	DisplayPort Main Link Channel 1 Differential Input
ML_IN 2	5, 6	I	DisplayPort Main Link Channel 2 Differential Input
ML_IN 3	8, 9	I	DisplayPort Main Link Channel 3 Differential Input
MAIN LINK OUTPUT PINS			
ML_OUT 0	30, 29	O	DisplayPort Main Link Port A Channel 0 Differential Output
ML_OUT 1	26, 25	O	DisplayPort Main Link Port A Channel 1 Differential Output
ML_OUT 2	23, 22	O	DisplayPort Main Link Port A Channel 2 Differential Output
ML_OUT 3	20, 19	O	DisplayPort Main Link Port A Channel 3 Differential Output
HOT PLUG DETECT PINS0			
HPD_OUT	11	O	Hot Plug Detect Output to the DisplayPort Source
HPD_IN	15	I	Hot Plug Detect Input from the DisplayPort Connector
CABLE ADAPTER DETECT PINS			
CAD_OUT	12	O	Cable Adapter Detect Output to the DisplayPort Source
CAD_IN	14	I	Cable Adapter Detect Input from the DisplayPort Connector
CONTROL PINS			
$\overline{\text{LP}}$	33	I	Low Power Select Bar
CAD_INV	31	I	Output Port Priority selection
DP <sub>adj</sub>	17	I	DisplayPort Main Link Output Gain Adjustment
NC	16		Not Connected
SUPPLY AND GROUND PINS			
VCC	4, 16, 24, 28, 36		Primary Supply Voltage
VDD	10		HPD and CAD Output Voltage
GND	1, 7, 13, 21, 27, 32		Ground

**Table 1. Control Pin Lookup**

SIGNAL	LEVEL <sup>(1)</sup>	STATE	DESCRIPTION
LP	H	Normal Mode	Normal operational mode for device
	L	Low Power Mode	Device is forced into a Low Power state causing the outputs to go to a high impedance state. All other inputs are ignored.
CAD_INV	H	CAD Inverted	The CAD output logic is inverted from the CAD input
	L	CAD not Inverted	The CAD output logic follows the CAD input
DP <sub>adj</sub>	4.53 kΩ	Increased Gain	Main Link DisplayPort Output will have an increased voltage swing
	6.49 kΩ	Nominal Gain	Main Link DisplayPort Output will have a nominal voltage swing
	10 kΩ	Decreased Gain	Main Link DisplayPort Output will have a decreased voltage swing

(1) (H) Logic High; (L) Logic Low

**ORDERING INFORMATION**

PART NUMBER	PART MARKING	PACKAGE <sup>(1)</sup>
SN75DP118RHHR	DP118	36-pin QFN Reel (large)
SN75DP118RHHT	DP118	36-pin QFN Reel (small)

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at [www.ti.com](http://www.ti.com).

**ABSOLUTE MAXIMUM RATINGS**

over operating free-air temperature range (unless otherwise noted) <sup>(1)</sup>

		VALUE	UNIT
Supply Voltage Range <sup>(2)</sup>	V <sub>CC</sub> , V <sub>DD</sub>	–0.3 to 5.5	V
Voltage Range	Main Link I/O (ML_IN x, ML_OUT x) Differential Voltage	1.5	V
	HPD and CAD I/O	–0.3 to V <sub>CC</sub> + 0.3	V
	Control I/O	–0.3 to V <sub>CC</sub> + 0.3	V
Electrostatic discharge	Human body model <sup>(3)</sup>	±12000	V
	Charged-device model <sup>(4)</sup>	±1000	V
	Machine model <sup>(5)</sup>	±200	V
Continuous power dissipation		See Dissipation Rating Table	

- (1) Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any conditions beyond those indicated under recommended operating conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values, except differential voltages, are with respect to network ground terminal.
- (3) Tested in accordance with JEDEC Standard 22, Test Method A114-B.
- (4) Tested in accordance with JEDEC Standard 22, Test Method C101-A.
- (5) Tested in accordance with JEDEC Standard 22, Test Method A115-A.

**DISSIPATION RATINGS**

PACKAGE	PCB JEDEC STANDARD	T <sub>A</sub> < 25°C	DERATING FACTOR <sup>(1)</sup> ABOVE T <sub>A</sub> = 25°C	T <sub>A</sub> = 85°C POWER RATING
36-pin QFN (RHH)	Low-K	759 mW	7.5 mW/°C	303 mW
	High-K	2127 mW	21.2 mW/°C	851 mW

- (1) This is the inverse of the junction-to-ambient thermal resistance when board-mounted and with no air flow.

**THERMAL CHARACTERISTICS**

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX <sup>(1)</sup>	UNIT
R <sub>θJB</sub> Junction-to-board thermal resistance	4x4 Thermal vias under powerpad		28.11		°C/W
R <sub>θJC</sub> Junction-to-case thermal resistance			32.77		°C/W
P <sub>D</sub> Device power dissipation	$\overline{LP} = 5.5\text{ V}$ ; ML: V <sub>PP</sub> = 1200 mV, 2.7 Gbps, PRBS; HPD_IN/CAD_IN/CAD_INV = 5.5 V; V <sub>CC</sub> = 5.5 V, V <sub>DD</sub> = 5.25 V; Temp = 85°C; DP <sub>adj</sub> = 6.49 kΩ		240	280	mW
P <sub>SD</sub> Device power dissipation under low power	$\overline{LP} = 0\text{ V}$ ; HPD_IN/CAD_IN/CAD_INV = 5.5 V; V <sub>CC</sub> = 5.5 V, V <sub>DD</sub> = 5.2 V; Temp = 85°C; DP <sub>adj</sub> = 6.49 kΩ			40	μW

- (1) Maximum Rating is simulated under worse case condition.

## RECOMMENDED OPERATING CONDITIONS

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V <sub>CC</sub>	Supply Voltage	4.5	5	5.5	V
V <sub>DD</sub>	HPD and CAD Output reference voltage	1.62		5.25	V
T <sub>A</sub>	Operating free-air temperature	0		85	°C
<b>MAIN LINK DIFFERENTIAL PINS</b>					
V <sub>ID</sub>	Peak-to-peak input differential voltage	0.15		1.40	V
d <sub>R</sub>	Data rate			2.7	Gbps
R <sub>t</sub>	Termination resistance	45	50	55	Ω
V <sub>O(term)</sub>	Output termination voltage	0		2	V
<b>HPD, CAD, AND CONTROL PINS</b>					
V <sub>IH</sub>	High-level input voltage	2		5.5	V
V <sub>IL</sub>	Low-level input Voltage	0		0.8	V

## DEVICE POWER

The SN75DP118 is designed to operate off of a single 5V supply.

## ELECTRICAL CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
I <sub>CC</sub>	Supply current $\overline{LP} = 5.5\text{ V}$ ; ML: V <sub>PP</sub> = 1200 mV, 2.7 Gbps, PRBS; HPD_IN/CAD_IN/CAD_INV = 5.5 V; V <sub>CC</sub> = 5.5 V, V <sub>DD</sub> = 5.25 V; Temp = 85°C; DP <sub>adj</sub> = 6.49 kΩ		50	55	mA
I <sub>DD</sub>	Supply current V <sub>DD</sub> = 5.5 V		0.1	2	mA
I <sub>SD</sub>	Shutdown current $\overline{LP} = 0\text{ V}$ ; HPD_IN/CAD_IN/CAD_INV = 5.5 V; V <sub>CC</sub> = 5.5 V, V <sub>DD</sub> = 5.25 V; Temp = 85°C; DP <sub>adj</sub> = 6.49 kΩ		4	10	μA

## HOT PLUG AND CABLE ADAPTER DETECT

The SN75DP118 has a built in level shifter for the HPD and CAD outputs. The output voltage level of the HPD and CAD pins is defined by the voltage level of the VDD pin. The state of the HPD pin will also set the active state of the device. If HPD is low the device will enter low power mode. Once HPD goes high, the device will come out of low power mode and enter active mode. If HPD goes LOW for a period of time exceeding t<sub>T(HPD)</sub>, the device will enter the low power mode.

## ELECTRICAL CHARACTERISTICS

over recommended operating (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V <sub>OH5</sub>	High-level output voltage I <sub>OH</sub> = -100 μA, V <sub>DD</sub> = 5V	4.5		5	V
V <sub>OH3.3</sub>		3		3.3	V
V <sub>OH2.5</sub>		2.25		2.5	V
V <sub>OH1.8</sub>		1.62		1.8	V
V <sub>OL</sub>	Low-level output voltage I <sub>OH</sub> = 100 μA	0		0.4	V
I <sub>H</sub>	High-level input current V <sub>IH</sub> = 2 V, V <sub>CC</sub> = 5.5 V	-10		10	μA
I <sub>L</sub>	Low-level input current V <sub>IL</sub> = 0.8 V, V <sub>CC</sub> = 5.5 V	-10		10	μA

[查询 SN75DP118 供应商](#)

# SWITCHING CHARACTERISTICS

over recommended operating (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{PD(CAD)}$ Propagation delay	$V_{DD} = 5\text{ V}$		20	30	ns
$t_{PD(HPD)}$ Propagation delay	$V_{DD} = 5\text{ V}$		70	110	ns
$t_{T(HPD)}$ HPD logic switch time	$V_{DD} = 5\text{ V}$	200		400	ms
$t_{M(HPD)}$ Minimum output pulse duration	$V_{DD} = 5\text{ V}$	100			ns
$t_{Z(HPD)}$ Low power to high-level propagation delay	$V_{DD} = 5\text{ V}$		70	110	ns

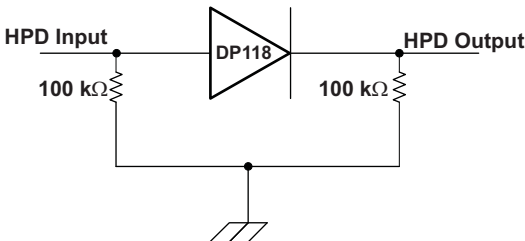


Figure 1. HPD Test Circuit

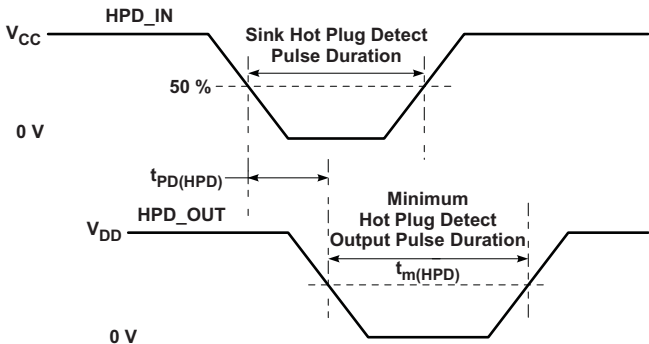


Figure 2. HPD Timing Diagram #1

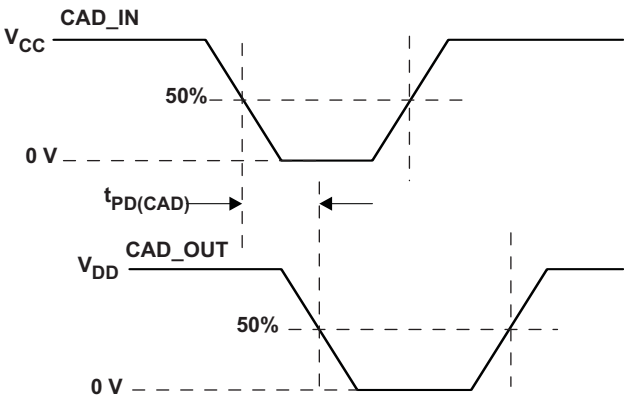


Figure 3. CAD Timing Diagram

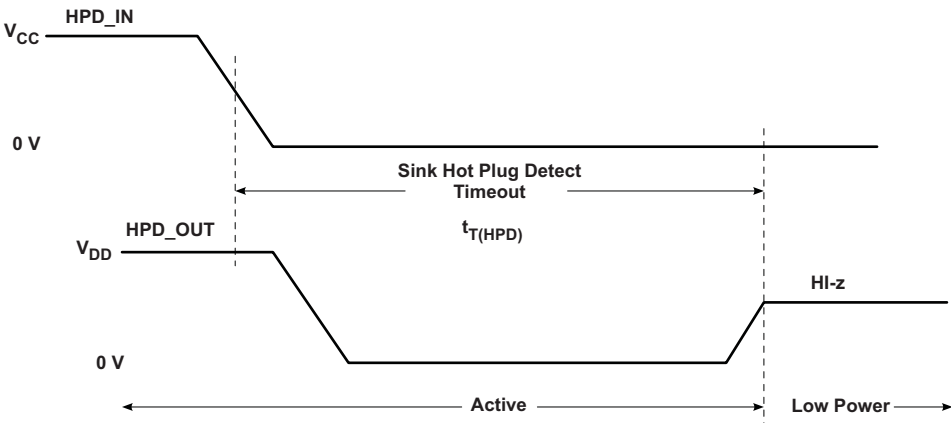
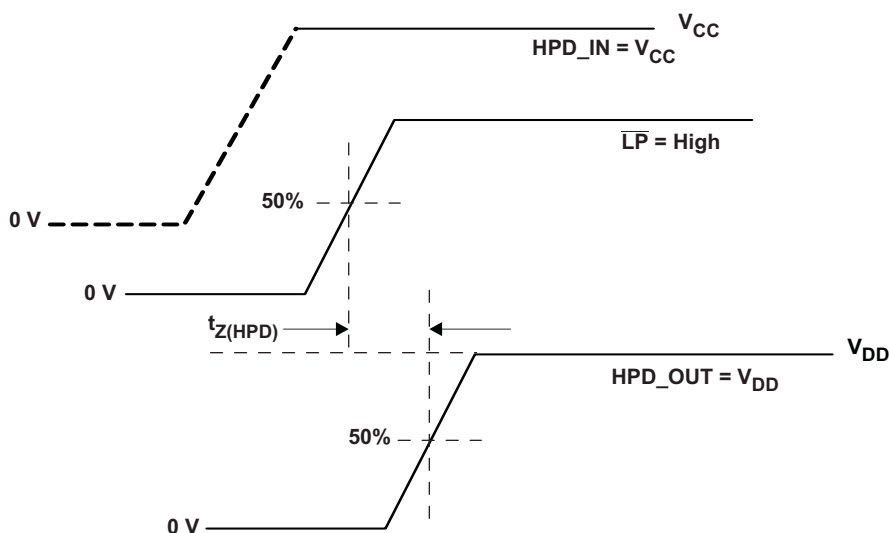


Figure 4. HPD Timing Diagram Number 2



**Figure 5. HPD Timing Diagram Number 3**

## MAIN LINK PINS

The main link I/O of the SN75DP118 is designed to track the magnitude and frequency characteristics of the input waveform and replicate them on the output. A feature has also been incorporated in the SN75DP118 to either increase or decrease the output amplitude via the resistor connected between the DP<sub>adj</sub> pin and ground.

## ELECTRICAL CHARACTERISTICS

over recommended operating (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$\Delta V_{I/O(2)}$	Difference between input and output voltages ( $V_{OD} - V_{ID}$ )	$V_{ID} = 200 \text{ mV}$ , DP <sub>adj</sub> = 6.5 k $\Omega$	0	30	60	mV
$\Delta V_{I/O(3)}$		$V_{ID} = 300 \text{ mV}$ , DP <sub>adj</sub> = 6.5 k $\Omega$	-24	11	36	
$\Delta V_{I/O(4)}$		$V_{ID} = 400 \text{ mV}$ , DP <sub>adj</sub> = 6.5 k $\Omega$	-45	-15	15	
$\Delta V_{I/O(6)}$		$V_{ID} = 600 \text{ mV}$ , DP <sub>adj</sub> = 6.5 k $\Omega$	-87	-47	-22	
R <sub>INT</sub>	Input termination impedance		45	50	55	$\Omega$
V <sub>term</sub>	Input termination voltage		0		2	V

## SWITCHING CHARACTERISTICS

over recommended operating (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t <sub>R/F(DP)</sub>	Output edge rate (20% - 80%)	Input edge rate = 80 ps (20% - 80%)		115		ps
t <sub>PD</sub>	Propagation delay time	F = 1MHz, V <sub>ID</sub> = 400 mV	200	240	280	ps
t <sub>SK(1)</sub>	Intra-pair skew	F = 1MHz, V <sub>ID</sub> = 400 mV			20	ps
t <sub>SK(2)</sub>	Inter-pair skew	F = 1MHz, V <sub>ID</sub> = 400 mV			40	ps
t <sub>DPJIT(PP)</sub>	Peak-to-peak output residual jitter	dR = 2.7Gbps, V <sub>ID</sub> = 400 mV, PRBS7		25	35	ps

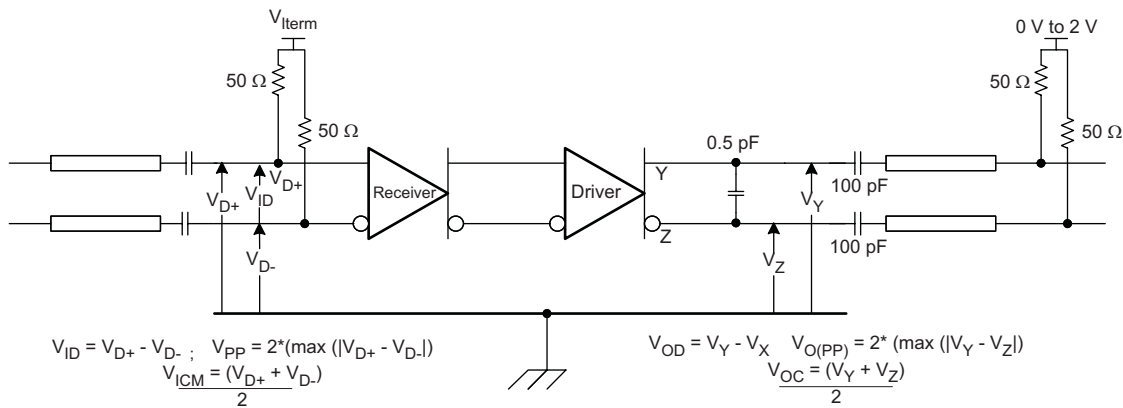


Figure 6. Main Link Test Circuit

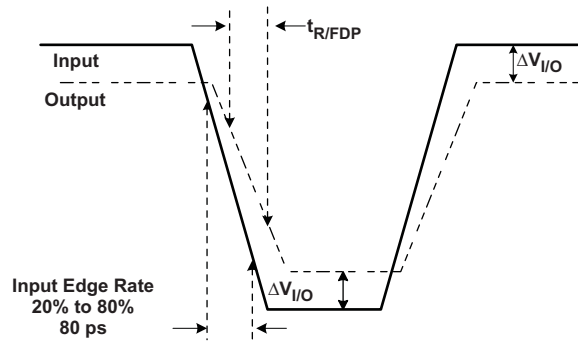
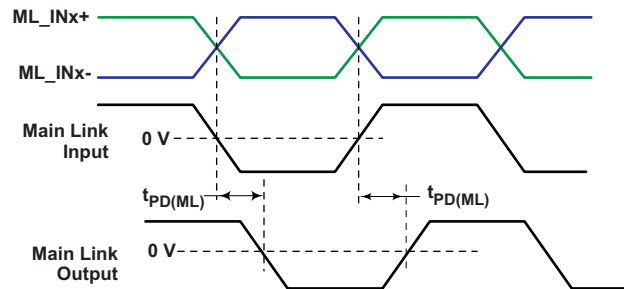
Figure 7. Main Link  $\Delta V_{I/O}$  and Edge Rate Measurements

Figure 8. Main Link Delay Measurements



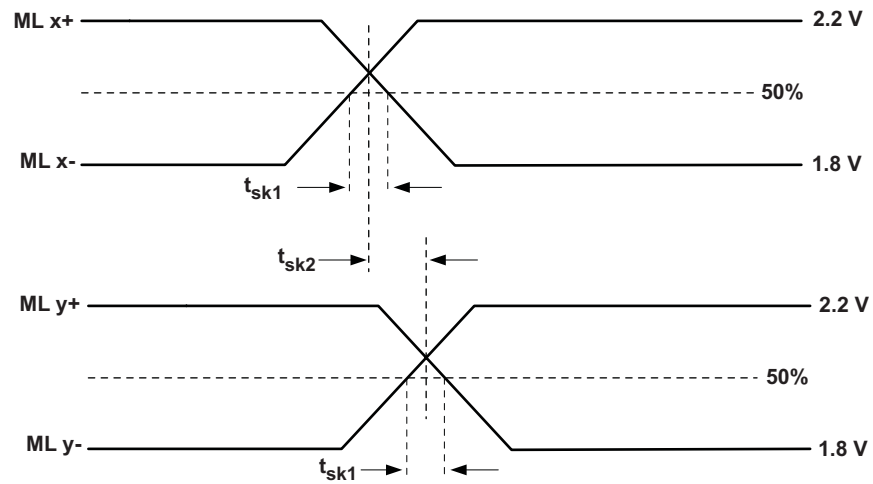


Figure 9. Main Link Skew Measurements

## TYPICAL CHARACTERISTICS

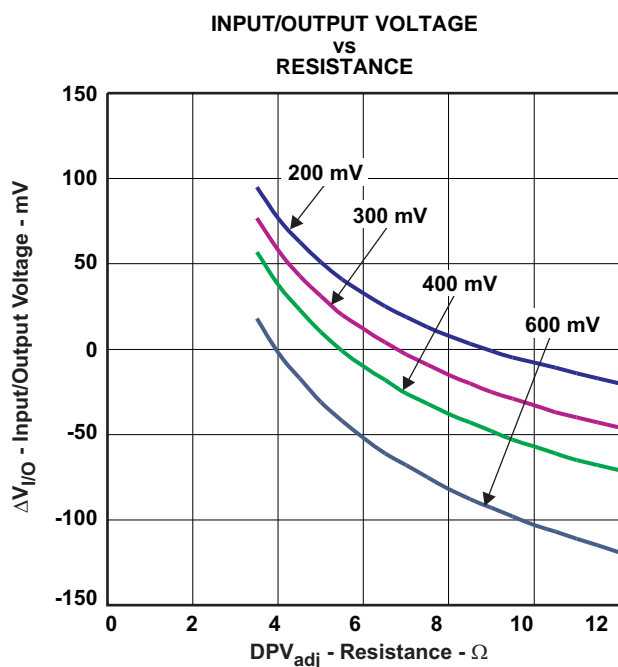


Figure 10.

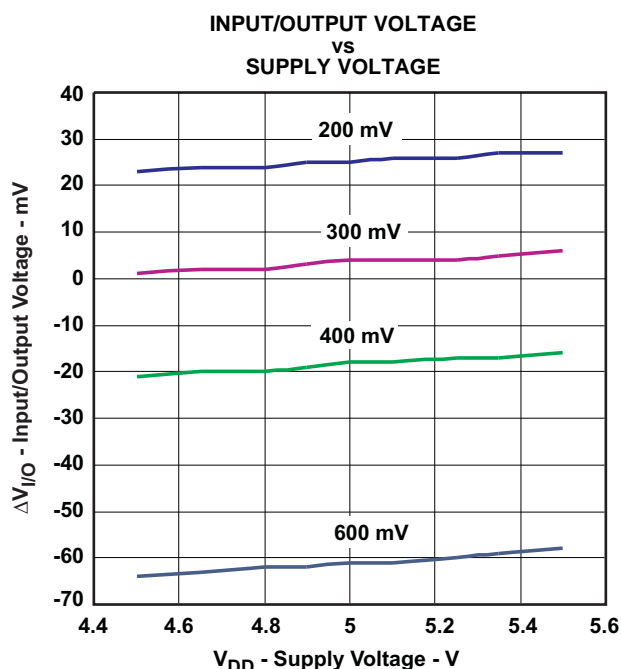


Figure 11.

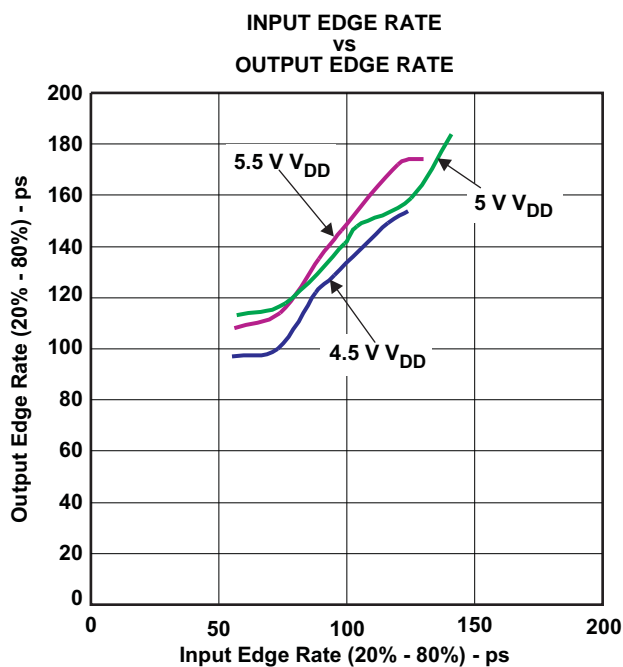


Figure 12.

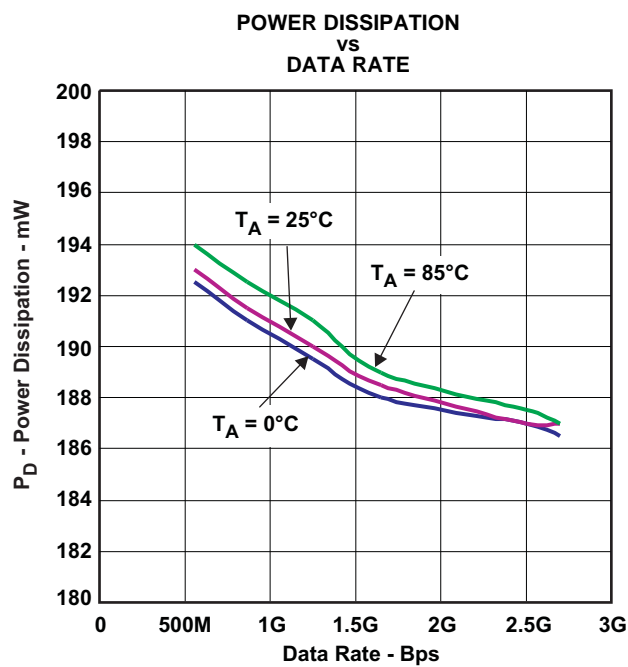


Figure 13.

## APPLICATION INFORMATION

### Power Logic

The power logic of the SN75DP118 is tied to the state of the HPD input pin as well as the low power pin. When HPD\_IN is LOW the SN75DP118 enters the low power state. In this state the outputs are high impedance and the device shuts down to optimize power conservation. When HPD\_IN goes high the device enters the normal operational state.

Several key factors were taken into consideration with this digital logic implementation of channel selection, as well as HPD repeating. This logic is described in the following scenarios.

#### Scenario 1. Low Power State to Active State:

- There are two possible cases for this scenario depending on the state of the low power pin.
  - Case one: In this case HPD\_IN is initially LOW and the low power pin is also LOW. In this initial state the device is in a low power mode. Once the HPD input goes to a HIGH state the device remains in the low power mode, with both the main link and auxiliary I/O in a high impedance state (Figure 14).
  - Case two: In this case HPD\_IN is initially LOW and the low power pin is HIGH. In this initial state the device is in a low power mode. Once the HPD input goes to a HIGH state the device comes out of the low power mode and enters active mode, enabling the main link and auxiliary I/O. The HPD output to the source is enabled and follows the logic state of the input HPD (Figure 15). This is specified as  $t_{Z(HPD)}$ .

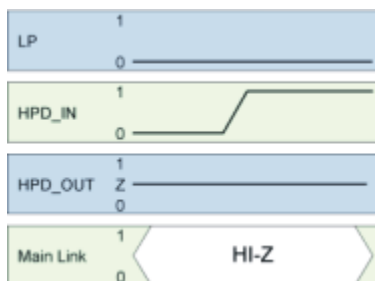


Figure 14.

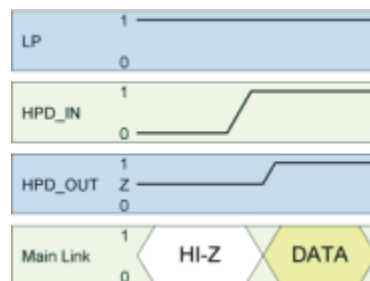


Figure 15.

#### Scenario 2. HPD Changes:

- In this case the HPD input is initially HIGH. The HPD output logic state follows the state of the HPD input. If the HPD input pulses LOW, as may be the case if the sink device is requesting an interrupt, the HPD output to the source will also pulse Low for the same duration of time with a slight delay (Figure 16). The delay of this signal through the SN75DP118 is specified as  $t_{PD(HPD)}$ . If the duration of the LOW pulse is less than  $t_{M(HPD)}$  it may not be accurately repeated to the source. If the duration of the LOW pulse exceeds  $t_{T(HPD)}$  the device determines that an unplug event has occurred and enters the low power state (Figure 17). Once the HPD input goes high again the device returns to the active state as indicated in scenario 1.

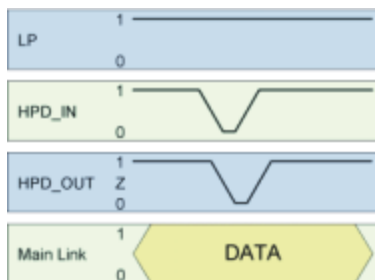


Figure 16.

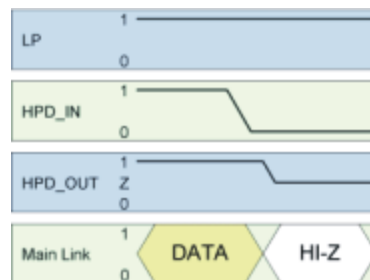


Figure 17.

## PACKAGING INFORMATION

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
SN75DP118RHHR	ACTIVE	VQFN	RHH	36	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR
SN75DP118RHHRG4	ACTIVE	VQFN	RHH	36	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR
SN75DP118RHHT	ACTIVE	VQFN	RHH	36	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR
SN75DP118RHHTG4	ACTIVE	VQFN	RHH	36	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.


**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**

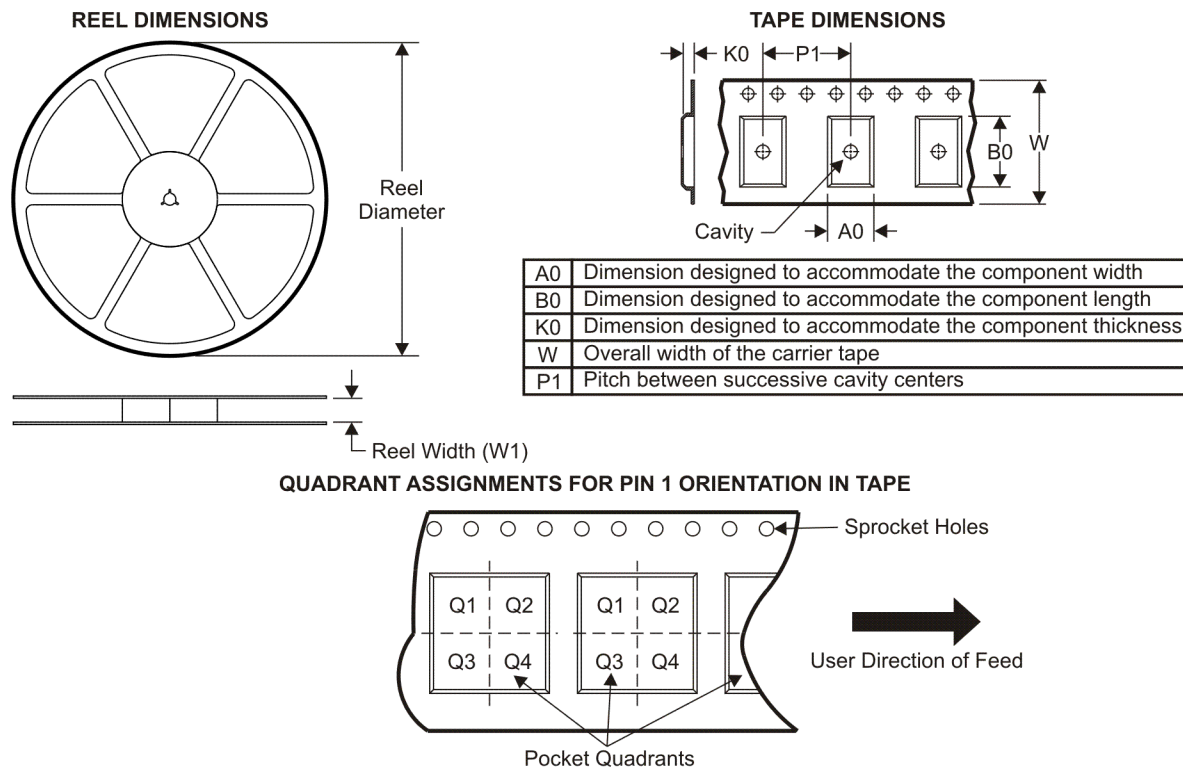

\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN75DP118RHHR	VQFN	RHH	36	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
SN75DP118RHHT	VQFN	RHH	36	250	180.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN75DP118RHHR	VQFN	RHH	36	2500	346.0	346.0	33.0
SN75DP118RHHT	VQFN	RHH	36	250	190.5	212.7	31.8

RHH (S-PVQFN-N36)

PLASTIC QUAD FLATPACK NO-LEAD

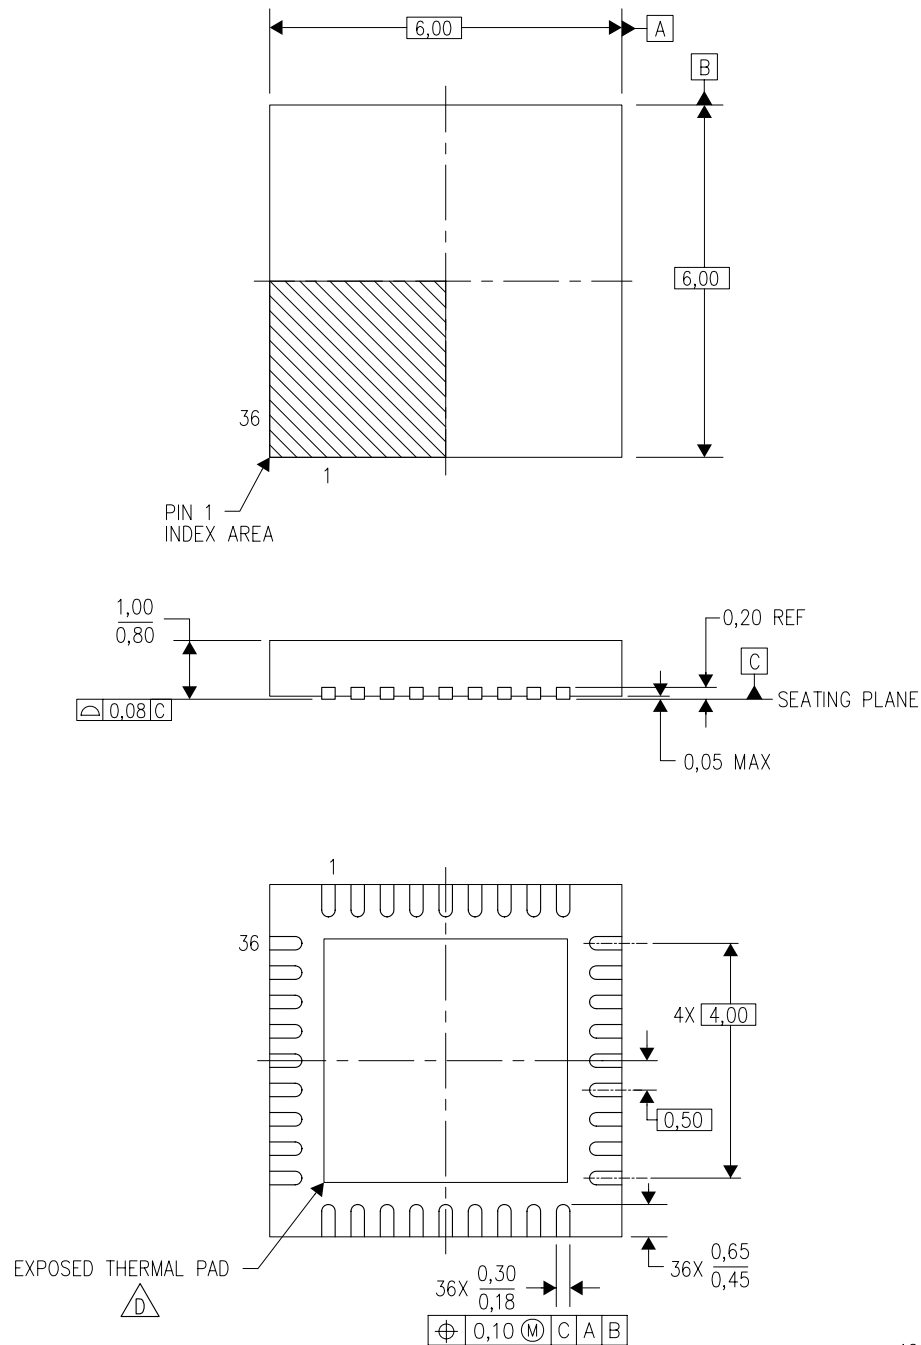

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. QFN (Quad Flatpack No-Lead) Package configuration.
  - D. The package thermal pad must be soldered to the board for thermal and mechanical performance. See the Product Data Sheet for details regarding the exposed thermal pad dimensions.
  - E. Falls within JEDEC MO-220.

RHH (S-PVQFN-N36)


PLASTIC QUAD FLATPACK NO-LEAD

## THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

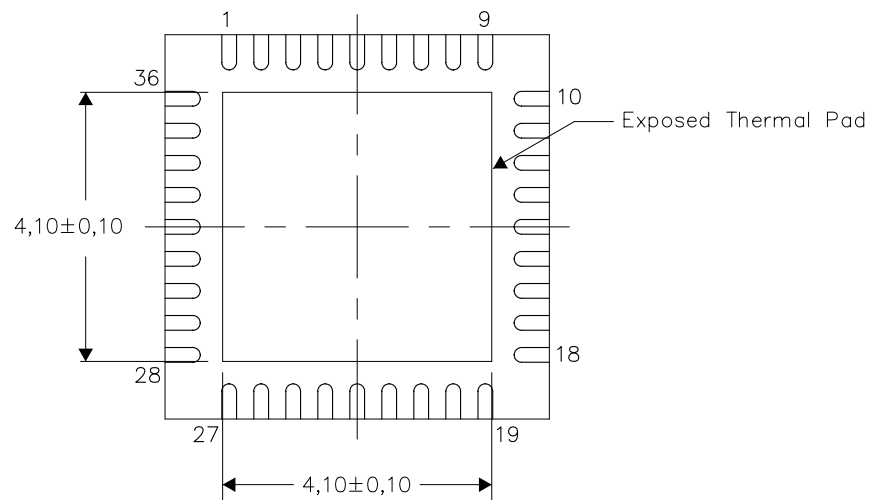

Bottom View


Exposed Thermal Pad Dimensions

4206362-3/H 09/10

NOTE: A. All linear dimensions are in millimeters



# RHH (S-PQFP-N36)

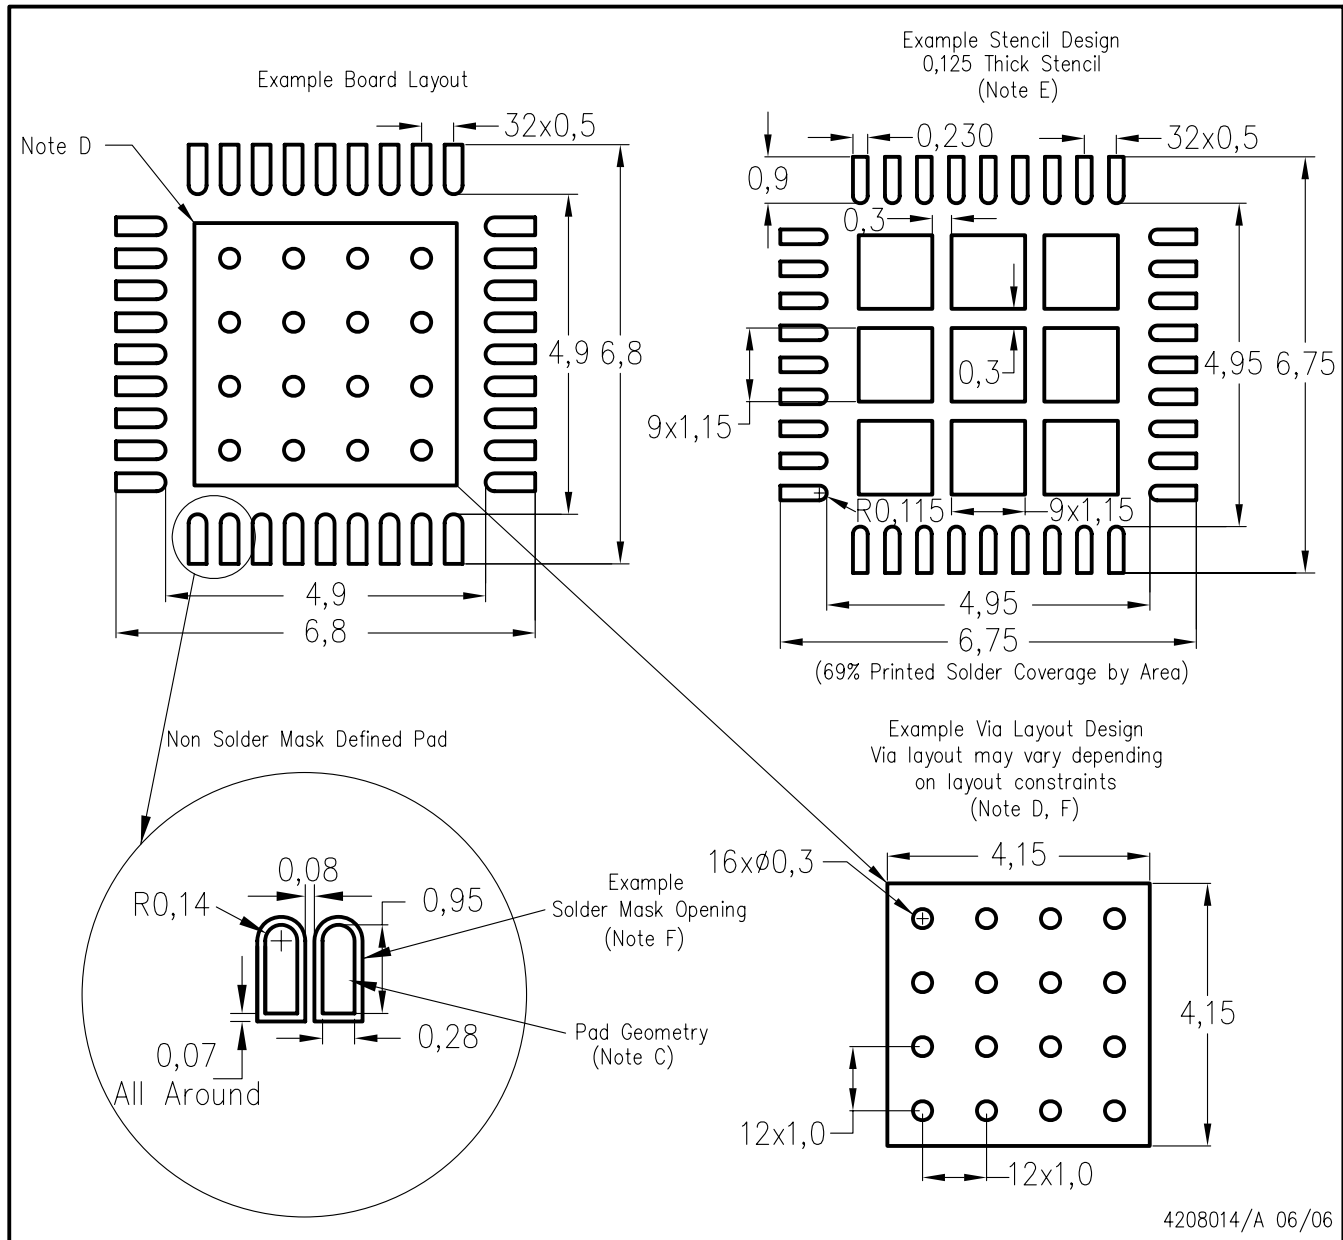

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack Packages, Texas Instruments Literature No. SCBA017, SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - Customers should contact their board fabrication site for recommended solder mask tolerances and via tenting recommendations for vias placed in the thermal pad.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>	Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>	Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>	Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>	Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>	Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>	Energy	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>	Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>	Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>	Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>	Space, Avionics & Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
RF/IF and ZigBee® Solutions	<a href="http://www.ti.com/lprf">www.ti.com/lprf</a>	Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>
		Wireless	<a href="http://www.ti.com/wireless-apps">www.ti.com/wireless-apps</a>