




5632 Series Stackable Right Angle LED Assembly

DESCRIPTION AND FEATURES

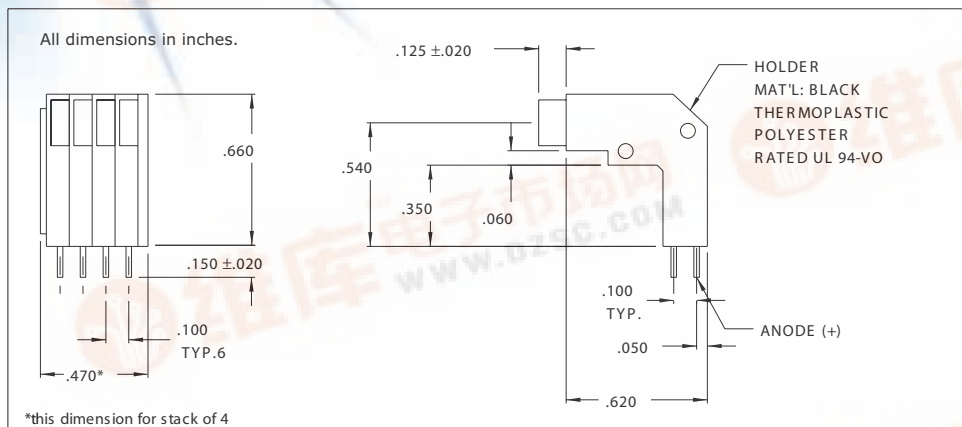

Features

- Stackable 1 to 14 positions.
- Designed to align with right angle DIP switches.
- Indicates status on/off, offered in red, green or yellow.
- 100° viewing angle, diffused epoxy.
- Standoffs prevent flux entrapment.
- High contrast black housing meets UL94V-O and Bellcore flammability ratings.

Mounting hole pattern on page 1-X6.

ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

Part Number	Emitted Color	Typical Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage		Reverse Breakdown Voltage Min. (V)	Peak Wavelength (nm)
					Typ. (V)	Max. (V)		
5632D1	Red	4	20	35	2.0	3.0	5	635
5632D3	Amber	4	20	30	2.2	3.0	5	600
5632D5	Green	4	20	35	2.1	3.0	5	562
5632D7	Yellow	4	20	30	2.0	3.0	5	585



America:
 CML Innovative Technologies, Inc.
 147 Central Avenue
 Hackensack -NJ 07601 -USA
 Tel: 1-201-489-8989
 Fax: 1-201-489-6911
 e-mail: americas@cml-it.com

Europe:
 CML Technologies GmbH & Co. KG
 Robert-Bunsen-Str.1
 67098 Bad Dürkheim -GERMANY
 Tel: +49 (0)6322 9567-0
 Fax: +49 (0)6322 9567-88
 e-mail: europe@cml-it.com

Asia:
 CML Innovative Technologies, Inc.
 61 Aida Street
 Singapore 459975
 Tel: (65) 9630-5003
 e-mail: asia@cml-it.com