


查询"1721005-06"供应商

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
A	Changed HDMI/M Mold Design /	03-12-07	DP
	Changed Cable Spec /		
	Changed From Crimp Terminal to Solder Terminal		

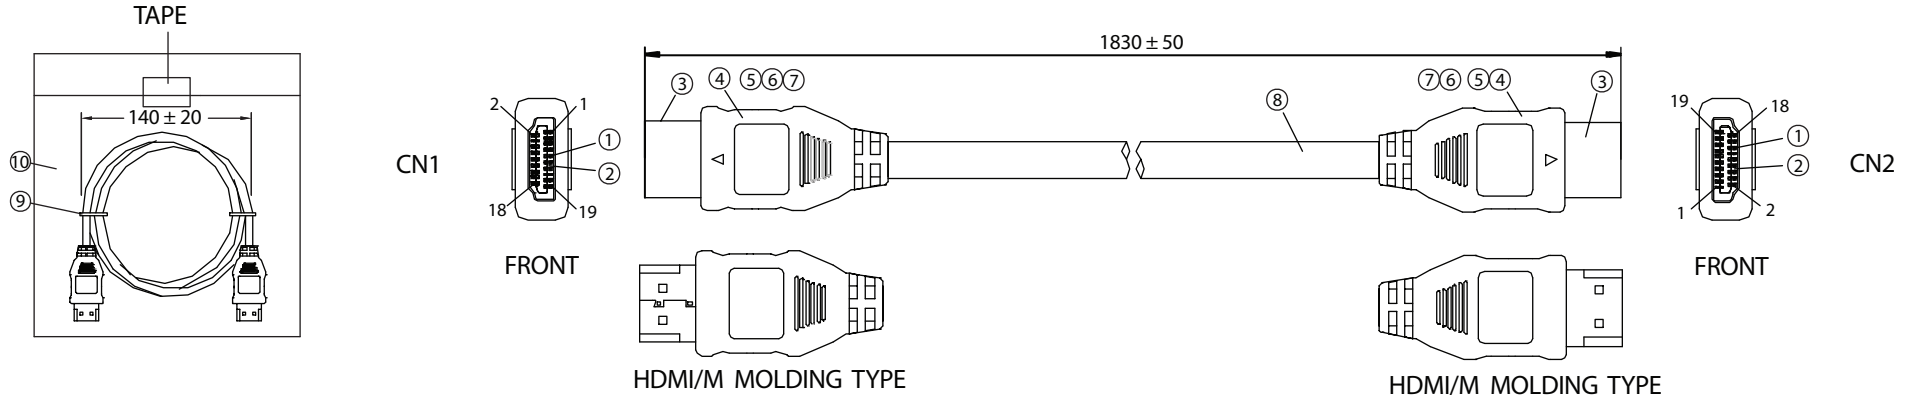

PIN OUT

CN1	CN2	CN1	CN2
1 — WHITE	1 — WHITE	13 — YELLOW	13 — YELLOW
3 — ORANGE	3 — ORANGE	14 — BLUE	14 — BLUE
2 — DRAIN	2 — DRAIN	15 — WHITE	15 — WHITE
4 — WHITE	4 — WHITE	16 — YELLOW	16 — YELLOW
6 — BLACK	6 — BLACK	17 — BLACK	17 — BLACK
5 — DRAIN	5 — DRAIN	18 — RED	18 — RED
7 — WHITE	7 — WHITE	19 — BROWN	19 — BROWN
9 — YELLOW	9 — YELLOW	SHELL — BRAID	SHELL — BRAID
8 — DRAIN	8 — DRAIN		
10 — WHITE	10 — WHITE		
12 — RED	12 — RED		
11 — DRAIN	11 — DRAIN		

NOTES:

- CABLE: UL20276
[(28AWGx1P+DW+FOIL)x4+28AWGx1P+28AWGx5C+MYLAR+FOIL+DW+BD]x1
OUTER JACKET: BLACK, O.D.: 7.0 ± 0.2mm
CHARACTERISTIC IMPEDANCE: 100 ohm
PRINTING: "E166307 AWM 20276 28AWG 80°C 30V VW-1
LOW VOLTAGE COMPUTER CABLE"
- CONNECTORS: HDMI MALE TO HDMI MALE
- HOOD: MOLDED TYPE, COLOR: BLACK
COPPER FOIL MUST BE SOLDERED 360° AROUND THE CONNECTOR SHELL
- CABLE ELECTRICAL TEST:
 - <1>.100% OPEN SHORT & MISS WIRE TEST
 - <2>.INSULATION RESISTANCE: DC400V 10M ohm MIN.
 - <3>.CONDUCTOR RESISTANCE: 3 ohm MAX.
- PACKING: 1PC/POLYBAG

No.	PARTS NAME	SPECIFICATION STANDARD	QTY	REMARKS
①	HDMI/M-CONTACT	BRASS/GOLD FLASH	38	
②	HDMI/M-INSULATOR	PBT/BLACK	2	
③	HDMI/M-SHELL	STEEL/NICKEL PLATED	2	
④	PCB		2	
⑤	HDMI/M-INNER MOLD	PE NATURAL	2	
⑥	HDMI/M-COPPER FOIL	WIDTH: 20mm	2	
⑦	HDMI/M-OUTER MOLD	60P PVC/COLOR: BLACK	2	
⑧	CABLE	KL03031ABK01H	1	
⑨	MINI TIE	PE/BLACK	2	
⑩	POLYBAG	PE/0.10x180x220	1	

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. WCI DIVISION		
		Part Number: 1721005-06 RoHS Compliant		
0-1	0.15	Description: HDMI/M - HDMI/M		
1-6	0.20			
6-18	0.30			REV. A
18-50	0.50			
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
120-250	0.90	B.Grubb 01-25-07	01-25-07	JJH / 01-25-07
250-500	1.20			