


# MKP

查询"475MKP275KJ"供应商

## Class X2 Radial Lead Metallized Polypropylene Capacitors



- EMI filter
- Across the line
- Antenna coupling
- Line bypass

|                                     |                                                                                                                                                                                   |                                                                                                                                                                    |                                          |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| Operating Temperature Range         |                                                                                                                                                                                   | -40°C to +110°C                                                                                                                                                    |                                          |
| Capacitance Tolerance               |                                                                                                                                                                                   | ±10% at 1kHz, 25°C                                                                                                                                                 |                                          |
| Voltage Range<br>50-60Hz            | VAC                                                                                                                                                                               | 310 (UL, CSA)<br>275 (IEC 60384-14)                                                                                                                                |                                          |
| Dissipation Factor                  |                                                                                                                                                                                   | 0.1% at 1 kHz, 20°C                                                                                                                                                |                                          |
| Insulation Resistance               | Capacitance                                                                                                                                                                       | Terminal to Terminal                                                                                                                                               | Terminal to Case                         |
|                                     | ≤0.33 μF                                                                                                                                                                          | 15,000MΩ at 100VDC                                                                                                                                                 | >30,000 MΩ at 100VDC<br>>500MΩ at 500VDC |
|                                     | >0.33 μF                                                                                                                                                                          | 5,000 MΩ x μF at 100VDC                                                                                                                                            | >30,000 MΩ at 100VDC<br>>500MΩ at 500VDC |
| Load Life                           | 1000 hours at+110°C with 125% of rated voltage with the voltage increased to 1000Vrms for 0.1 seconds every hour.                                                                 |                                                                                                                                                                    |                                          |
|                                     | Capacitance Change                                                                                                                                                                | <5% maximum of initial measured value                                                                                                                              |                                          |
|                                     | Dissipation Factor                                                                                                                                                                | <0.15% at 1kHz                                                                                                                                                     |                                          |
|                                     | Insulation Resistance                                                                                                                                                             | Capacitance                                                                                                                                                        | Terminal to Terminal                     |
|                                     |                                                                                                                                                                                   | ≤0.33uF                                                                                                                                                            | 7500 MΩ Minimum at 100VDC                |
|                                     |                                                                                                                                                                                   | >0.33uF                                                                                                                                                            | 2500 MΩxuF Minimum at 100VDC             |
| 3000 MΩ                             | Terminal to Case                                                                                                                                                                  |                                                                                                                                                                    |                                          |
| Humidity Test                       | 500 hours at 90 to 95% RH, 40°C and no voltage applied after which the following voltage shall be applied for 1minute to each capacitor<br>C≤0.0068uF 1500VAC, C>0.0068uF 1075VDC |                                                                                                                                                                    |                                          |
|                                     | Capacitance Change                                                                                                                                                                | <5% of initial measured value                                                                                                                                      |                                          |
|                                     | Dissipation Factor                                                                                                                                                                | <0.15% at 1kHz                                                                                                                                                     |                                          |
|                                     | Insulation Resistance                                                                                                                                                             | Capacitance                                                                                                                                                        | Terminal to Terminal                     |
|                                     |                                                                                                                                                                                   | ≤0.33uF                                                                                                                                                            | 7500 MΩ Minimum at 100VDC                |
|                                     |                                                                                                                                                                                   | >0.33uF                                                                                                                                                            | 2500 MΩxuF Minimum at 100VDC             |
| Terminal to Case                    | 15000 MΩ at 100 VDC                                                                                                                                                               |                                                                                                                                                                    |                                          |
| Voltage Impulse Test                | 24 pulses                                                                                                                                                                         |                                                                                                                                                                    |                                          |
|                                     | C≤ 1.0uF Vp=2.5kVDC<br>C>1.0uF Vp=2.5kV/√C                                                                                                                                        |                                                                                                                                                                    |                                          |
| Self-inductance                     | ≤1 nH/mm along the capacitor pitch and lead length                                                                                                                                |                                                                                                                                                                    |                                          |
| Dielectric Strength                 | Terminal to Terminal                                                                                                                                                              | C≤0.0068uF 1500Vac or 2121 Vdc for 1 minute<br>C>0.0068uF 1000Vac or 1768 Vdc for 1 minute<br>Cut-off current: 2Aac or 10mAdc<br>Current limiting resistance: 1Ω/V |                                          |
|                                     | Terminal to Case                                                                                                                                                                  | 2050VAC applied for 1 minute.                                                                                                                                      |                                          |
| Capacitance Drift Factor            | <1 nH/mm along the capacitor pitch and lead length                                                                                                                                |                                                                                                                                                                    |                                          |
| Capacitance Temperature Coefficient | -200 ppm/°C, ± 100ppm/°C                                                                                                                                                          |                                                                                                                                                                    |                                          |
| Construction                        | Wound, Extended metallized film                                                                                                                                                   |                                                                                                                                                                    |                                          |
| Dielectric                          | Polypropylene film                                                                                                                                                                |                                                                                                                                                                    |                                          |
| Electrodes                          | Vacuum deposited zinc layers                                                                                                                                                      |                                                                                                                                                                    |                                          |
| Leads                               | Tinned copper wire (lead free)                                                                                                                                                    |                                                                                                                                                                    |                                          |
| Coating                             | Solvent resistant box with flame retardant epoxy sealed resin (UL 94V-0)                                                                                                          |                                                                                                                                                                    |                                          |



ILLINOIS CAPACITOR, INC.

3757 W. Touhy Ave., Lincolnwood, IL 60712 • (847) 675-1760 • Fax (847) 673-2850 • www.illcap.com

# MKP

Class X2 Radial  
Lead Metallized  
Polypropylene  
Capacitors

查询"475MKP275KJ"供应商

## STANDARD PART LISTING

| Capacitance<br>( $\mu$ F) | IC <sup>®</sup> PART<br>NUMBER | dv/dt<br>(V/ $\mu$ s) | LxHxT<br>(mm) | S   | d   |
|---------------------------|--------------------------------|-----------------------|---------------|-----|-----|
| 0.0047                    | 472MKP275K                     | 400                   | 13x10x5       | 10  | 0.6 |
| 0.0047                    | 472MKP275KC                    | 500                   | 10x8x4        | 7.5 | 0.6 |
| 0.0056                    | 562MKP275KC                    | 500                   | 10x8x4        | 7.5 | 0.6 |
| 0.0056                    | 562MKP275KD                    | 400                   | 13x10x5       | 10  | 0.6 |
| 0.0068                    | 682MKP275K                     | 400                   | 13x10x5       | 10  | 0.6 |
| 0.0068                    | 682MKP275KC                    | 500                   | 10x8x4        | 7.5 | 0.6 |
| 0.0082                    | 822MKP275KC                    | 500                   | 10x8x4        | 7.5 | 0.6 |
| 0.0082                    | 822MKP275KD                    | 400                   | 13x10x5       | 10  | 0.6 |
| 0.01                      | 103MKP275K                     | 400                   | 13x10x5       | 10  | 0.6 |
| 0.01                      | 103MKP275KC                    | 500                   | 10x8x4        | 7.5 | 0.6 |
| 0.01                      | 103MKP275KE                    | 300                   | 18x11x5       | 15  | 0.8 |
| 0.012                     | 123MKP275KC                    | 500                   | 10x8x4        | 7.5 | 0.6 |
| 0.012                     | 123MKP275KD                    | 400                   | 13x10x5       | 10  | 0.6 |
| 0.015                     | 153MKP275K                     | 400                   | 13x11x5       | 10  | 0.6 |
| 0.015                     | 153MKP275KC                    | 500                   | 10x9x4        | 7.5 | 0.6 |
| 0.015                     | 153MKP275KE                    | 300                   | 18x11x5       | 15  | 0.8 |
| 0.018                     | 183MKP275KC                    | 500                   | 10x9x4        | 7.5 | 0.6 |
| 0.018                     | 183MKP275KD                    | 400                   | 13x11x5       | 10  | 0.6 |
| 0.022                     | 223MKP275K                     | 400                   | 13x11x5       | 10  | 0.6 |
| 0.022                     | 223MKP275KB                    | 300                   | 18x11x5       | 15  | 0.8 |
| 0.022                     | 223MKP275KC                    | 500                   | 10x9x4        | 7.5 | 0.6 |
| 0.027                     | 273MKP275KC                    | 500                   | 10x10x5       | 7.5 | 0.6 |
| 0.027                     | 273MKP275KD                    | 400                   | 13x11x5       | 10  | 0.6 |
| 0.033                     | 333MKP275K                     | 400                   | 13x12x6       | 10  | 0.6 |
| 0.033                     | 333MKP275KC                    | 500                   | 10x10x5       | 7.5 | 0.6 |
| 0.033                     | 333MKP275KE                    | 300                   | 18x11x5       | 15  | 0.8 |
| 0.039                     | 393MKP275KC                    | 500                   | 10x11x5       | 7.5 | 0.6 |
| 0.039                     | 393MKP275KD                    | 400                   | 13x9x4        | 10  | 0.6 |
| 0.039                     | 393MKP275KE                    | 300                   | 18x11x5       | 15  | 0.8 |
| 0.047                     | 473MKP275K                     | 300                   | 18x11x5       | 15  | 0.8 |
| 0.047                     | 473MKP275KC                    | 500                   | 10x12x6       | 7.5 | 0.6 |
| 0.047                     | 473MKP275KD                    | 400                   | 13x10x5       | 10  | 0.6 |
| 0.056                     | 563MKP275KC                    | 500                   | 10x12x6       | 7.5 | 0.6 |
| 0.056                     | 563MKP275KD                    | 400                   | 13x10x5       | 10  | 0.6 |
| 0.056                     | 563MKP275KE                    | 300                   | 18x11x5       | 15  | 0.8 |
| 0.068                     | 683MKP275K                     | 300                   | 18x11x5       | 15  | 0.8 |
| 0.068                     | 683MKP275KD                    | 400                   | 13x11x5       | 10  | 0.6 |
| 0.082                     | 823MKP275KD                    | 400                   | 13x12x6       | 10  | 0.6 |
| 0.082                     | 823MKP275KE                    | 300                   | 18x11x5       | 15  | 0.8 |
| 0.1                       | 104MKP275K                     | 300                   | 18x11x5       | 15  | 0.8 |
| 0.1                       | 104MKP275KD                    | 400                   | 13x12x6       | 10  | 0.8 |

Convert to inches, divide by 25.4

| Capacitance<br>( $\mu$ F) | IC <sup>®</sup> PART<br>NUMBER | dv/dt<br>(V/ $\mu$ s) | LxHxT<br>(mm) | S    | d   |
|---------------------------|--------------------------------|-----------------------|---------------|------|-----|
| 0.12                      | 124MKP275KD                    | 400                   | 13x13x7       | 10   | 0.6 |
| 0.15                      | 154MKP275K                     | 180                   | 26x14.5x6     | 22.5 | 0.8 |
| 0.15                      | 154MKP275KD                    | 400                   | 13x14x8       | 10   | 0.6 |
| 0.15                      | 154MKP275KE                    | 300                   | 18x13.5x7.5   | 15   | 0.8 |
| 0.18                      | 184MKP275KE                    | 300                   | 18x12x6       | 15   | 0.8 |
| 0.18                      | 184MKP275KG                    | 180                   | 26x14.5x6     | 22.5 | 0.8 |
| 0.22                      | 224MKP275K                     | 180                   | 26x14.5x6     | 22.5 | 0.8 |
| 0.22                      | 224MKP275KB                    | 300                   | 18x14x8       | 15   | 0.8 |
| 0.27                      | 274MKP275KE                    | 300                   | 18x14.5x7.5   | 15   | 0.8 |
| 0.33                      | 334MKP275K                     | 180                   | 26x17x8.5     | 22.5 | 0.8 |
| 0.33                      | 334MKP275KE                    | 300                   | 18x13.5x10    | 15   | 0.8 |
| 0.39                      | 394MKP275KE                    | 300                   | 18x17x8       | 15   | 0.8 |
| 0.39                      | 394MKP275KG                    | 180                   | 26x16.5x7.5   | 22.5 | 0.8 |
| 0.47                      | 474MKP275KE                    | 300                   | 18x18x9       | 15   | 0.8 |
| 0.47                      | 474MKP275K                     | 120                   | 32x18x9       | 27.5 | 0.8 |
| 0.47                      | 474MKP275KB                    | 180                   | 26x16.5x7     | 22.5 | 0.8 |
| 0.56                      | 564MKP275KE                    | 300                   | 18x19x10      | 15   | 0.8 |
| 0.56                      | 564MKP275KG                    | 180                   | 26x16.5x7.5   | 22.5 | 0.8 |
| 0.56                      | 564MKP275KH                    | 120                   | 31x20x10      | 27.5 | 0.8 |
| 0.68                      | 684MKP275K                     | 120                   | 31x20x10      | 27.5 | 0.8 |
| 0.68                      | 684MKP275KG                    | 180                   | 26x17x8       | 22.5 | 0.8 |
| 0.82                      | 824MKP275KG                    | 180                   | 26x18x9       | 22.5 | 0.8 |
| 0.82                      | 824MKP275KH                    | 120                   | 31x20x11      | 27.5 | 0.8 |
| 1                         | 105MKP275K                     | 120                   | 31x20x11      | 27.5 | 0.8 |
| 1                         | 105MKP275KG                    | 180                   | 26x19x10      | 22.5 | 0.8 |
| 1.2                       | 125MKP275KG                    | 180                   | 26x20x11.5    | 22.5 | 0.8 |
| 1.5                       | 155MKP275K                     | 120                   | 31x23.5x14    | 27.5 | 0.8 |
| 1.5                       | 155MKP275KE                    | 180                   | 26x22x12      | 22.5 | 0.8 |
| 1.8                       | 185MKP275KE                    | 180                   | 26x24x14      | 22.5 | 0.8 |
| 2.2                       | 225MKP275K                     | 120                   | 31x26x18      | 27.5 | 0.8 |
| 2.2                       | 225MKP275KE                    | 180                   | 26x25x15      | 22.5 | 0.8 |
| 3.3                       | 335MKP275KH                    | 100                   | 31x33x18      | 27.5 | 1.0 |
| 3.3                       | 335MKP275KJ                    | 100                   | 41.5x28.5x16  | 37.5 | 1.0 |
| 3.9                       | 395MKP275KJ                    | 100                   | 41.5x35x20    | 37.5 | 1.0 |
| 4.7                       | 475MKP275KH                    | 120                   | 31.5x37x22    | 27.5 | 1.0 |
| 4.7                       | 475MKP275KJ                    | 100                   | 41.5x32x19    | 37.5 | 1.0 |
| 5.6                       | 565MKP275KJ                    | 100                   | 41.5x35x20    | 37.5 | 1.0 |
| 6.8                       | 685MKP275KJ                    | 100                   | 41.5x39x24    | 37.5 | 1.0 |
| 8.2                       | 825MKP275KJ                    | 100                   | 41.5x45x30    | 37.5 | 1.0 |
| 10                        | 106MKP275KJ                    | 100                   | 41.5x45x30    | 37.5 | 1.0 |



ILLINOIS CAPACITOR, INC.


3757 W. Touhy Ave., Lincolnwood, IL 60712 • (847) 675-1760 • Fax (847) 673-2850 • www.illcap.com

# MKP

Class X2 Radial  
Lead Metallized  
Polypropylene  
Capacitors


[查询"475MKP275KJ"供应商](#)

## PHYSICAL DIMENSIONS

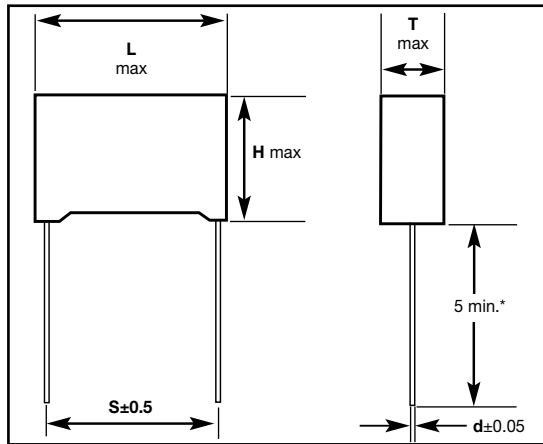

All dimensions in (mm)

**\*17mm lead length available upon request**

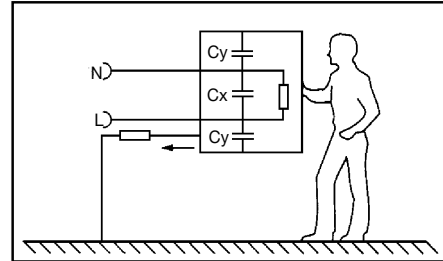

X2 capacitors are used to suppress electrical noise by reducing the input impedance of the device incorporating the capacitor.

X2 capacitors are connected across the supply line where failure of the capacitor will not result in personal exposure to electrical shock.

X2 capacitors are to be used in applications where the peak voltage is  $\leq 1200V$ .

| Safety Agency | Standard                   | File #          | Rated Voltage | Class                                        |
|---------------|----------------------------|-----------------|---------------|----------------------------------------------|
| UL            | 1414                       | E-317132        | 310 VAC       | FOK X2 <sup>*A</sup><br>FOK Y2 <sup>*B</sup> |
| CSA           | C22.2, No.1-98, 8-M1986    | 158927, LR85363 | 250 VAC       | X                                            |
| CB            | IEC-60384-14               | DE-1-11829      | 275 VAC       | X2                                           |
| ENEC          | EN-1324000<br>IEC-60384-14 | 139131L         | 275 VAC       | X2                                           |

A- Antenna coupling, Line Bypass, Across the line  
B- Electromagnetic Interference Filter