


# .100" × .300" DIP

14, 16 & 18 Position

[查询"3406-0000"供应商](#)

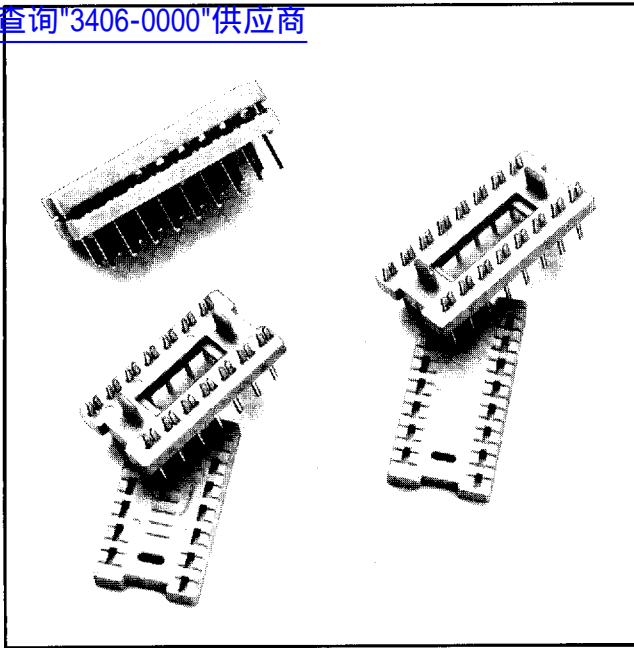

- Fits standard IC sockets
- Strong legs, less susceptible to bending or breaking
- Gold or tin lead plating options
- Round or rectangular contact leg options
- Low profile

TS-0617-05  
Sheet 1 of 2

107

## Physical

### Insulation

Material: Glass Filled Polyester (PBT)  
Flammability: UL94V-0  
Color: Gray

### Contact

Material: Copper Alloy  
Plating  
Underplate: 100  $\mu$ " [ 2.54  $\mu$ m ] Nickel — QQ-N-290, Class 2  
U-Slot & Solder Tails: 30  $\mu$ " [ 0.76  $\mu$ m ] Gold — MIL-G-45204, Type II, Grade C or  
200  $\mu$ " [ 0.76  $\mu$ m ] 90/10 Tin Lead — MIL-P-81728

Wire Accomodation: 26 & 28 AWG Solid or Stranded

Marking: 3M Logo, Part Identification and Contact Position Numbers

## Electrical

Current Rating: 1 A  
Insulation Resistance:  $> 1 \times 10^9 \Omega$  at 500 VDC  
Withstanding Voltage: 1000 Vrms at Sea Level

## Environmental

Temperature Rating:  $-55^\circ\text{C}$  to  $+105^\circ\text{C}$


UL File No.: E68080

3M Electronic Products Division D 19F ■ 9035312 0004498 743 ■

# .100" x .300" DIP

## 14, 16 & 18 Position

查询"3406-0000"供应商

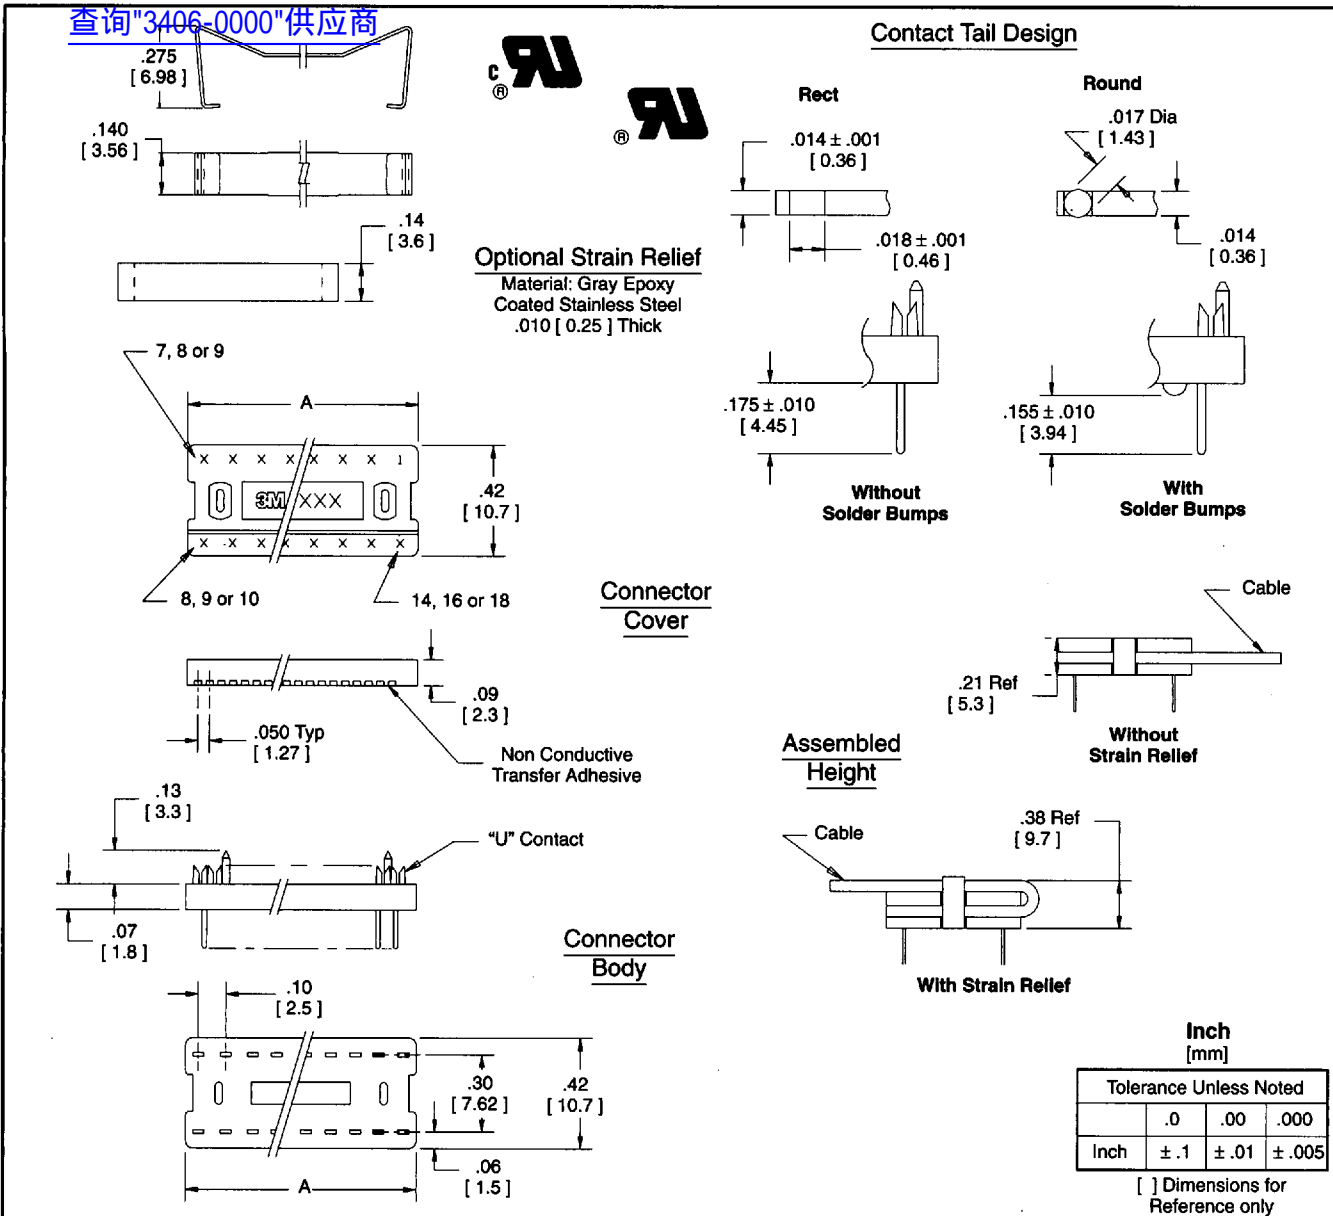

### Ordering Information

#### Connector

Contact Quantity	3M Part Number	Contact Tail	Contact Plating	Solder Bump	Dimension A
14	3406-0000	Rect	Gold	No	.75 [19.1]
	3406-0000T	Rect	Tin Lead	No	
	3406-0010	Rect	Gold	Yes	
	3406-0010T	Rect	Tin Lead	Yes	
	3406-0002	Round	Gold	No	
16	3416-0000	Rect	Gold	No	.85 [21.6]
	3416-0000T	Rect	Tin Lead	No	
	3416-0010	Rect	Gold	Yes	
	3416-0010T	Rect	Tin Lead	Yes	
	3416-0002	Round	Gold	No	
18	3563-3000	Rect	Gold	No	.95 [24.1]
	3563-3010T	Rect	Tin Lead	Yes	
	3563-3002	Round	Gold	No	
	3563-3012T	Round	Tin Lead	Yes	

#### Strain Relief (Optional)

3M Part Number	Used On	Dimension B
3448-3406	3406	.72 [18.3]
3448-3416	3416	.82 [20.8]
3448-3563	3563	.92 [23.4]

TS-0617-05  
Sheet 2 of 2