

查询"CTCDRH2D14F-4R7N"供应商

CTCDRH2D14F
SeriesFrom 1.5 μ H to 12 μ H

CHARACTERISTICS

Description: SMD (shielded) power inductor**Applications:** Power supplies for VTR, OA equipment, LCD televisions, PC notebooks, portable communication equipment, DC/DC converters, etc.**Operating Temperature:** -30°C to +100°C**Rated Current:** The rated current indicates the current when the inductance decreases to 65% over its nominal or D.C. current when the temperature rising $\Delta T=40^\circ\text{C}$ lower, whichever is lower.**Inductance Tolerance:** $\pm 30\%$ **Testing:** Tested on a HP4285A at 100 KHz, 0.25Vrms, 0Adc**Packaging:** Tape & Reel**Marking:** Parts are marked with inductance code.**Miscellaneous:** RoHS Compliant**Additional Information:** Additional electrical & physical information available upon request**Samples available. See website for ordering information.**


SPECIFICATIONS

Part are available in $\pm 30\%$ tolerance only


Part Number	Inductance (μ H)	Test Freq. (KHz)	DCR Max. (m Ω)	Rated DC Current (A)	Temp. Rise Current Typ. (A)
CTCDRH2D14F-1R5N	1.5	100	63	1.80	1.80
CTCDRH2D14F-1R8N	1.8	100	75	1.65	1.80
CTCDRH2D14F-2R2N	2.2	100	114	1.50	1.50
CTCDRH2D14F-2R7N	2.7	100	116	1.35	1.40
CTCDRH2D14F-3R3N	3.3	100	158	1.20	1.24
CTCDRH2D14F-3R9N	3.9	100	205	1.10	1.12
CTCDRH2D14F-4R7N	4.7	100	238	1.00	1.00
CTCDRH2D14F-5R6N	5.6	100	256	0.95	0.98
CTCDRH2D14F-6R8N	6.8	100	282	0.85	0.92
CTCDRH2D14F-8R2N	8.2	100	307	0.80	0.80
CTCDRH2D14F-100N	10	100	338	0.70	0.76
CTCDRH2D14F-120N	12	100	470	0.62	0.64

PHYSICAL DIMENSIONS

Size	A Max.	B Max.	C	D	E	F Max.
mm	3.2	3.2	1.0	2.1	3.3	1.55
inches	0.126	0.126	0.04	0.08	0.130	0.061

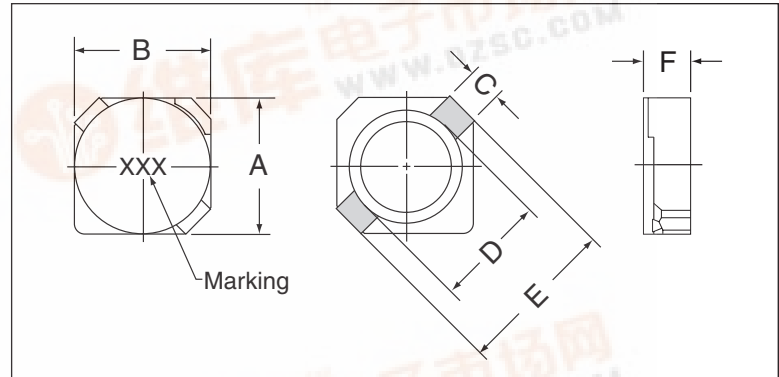

PAD LAYOUT

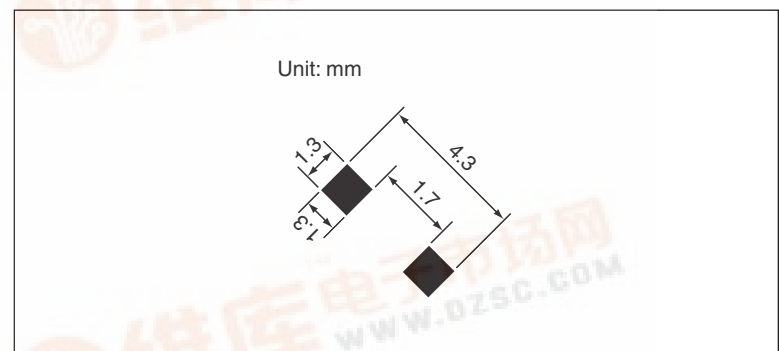

12.26.06

Manufacturer of Passive and Discrete Semiconductor Components

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2005 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice

