

Type: CEFD2010

Product Description


- 29.5×22.0mm Max.(L×W), 11.5mmMax. Height.
- In addition to the typical versions of parameters shown here, custom parameters are available to meet your exact requirements.




♦ Feature

- Max. Operating frequency 300kHz, Max. Operating Power 19.0W(100kHz).
- Ideally used as automotive lighting WLED driver transformer, can be also used as a general transformer.
- · RoHS Compliance

Dimensions (mm)

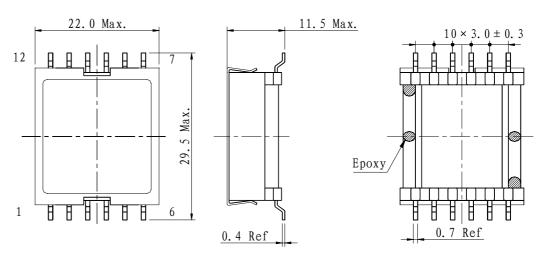


◆ Schematics (Bottom)



"o" indicates winding start.

♦Land Pattern



♦ Specification

Sample No.	Inductance (1-3) 100kHz/0.1V	D.C.R. (1-3) Max.	Leakage Inductance(1-3) 100kHz/0.1V	Hi-pot (1,3,4,5-8,9,10,11)
0399-T025	230 μ H ± 10 %	200m Ω	5.0 μ H Max.	DC1800V/1s